

Photometric test report

Family
LANTERN CLASSIC LED

Order number: **5XA5245KF14H**
EAN: **4058352834558**

LP number
57124_31

serial
documentation
08.07.2022



Version post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 1380 lm
Power consumption = 10.0 W
Luminous efficacy = 138 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: **877 cd/klm**

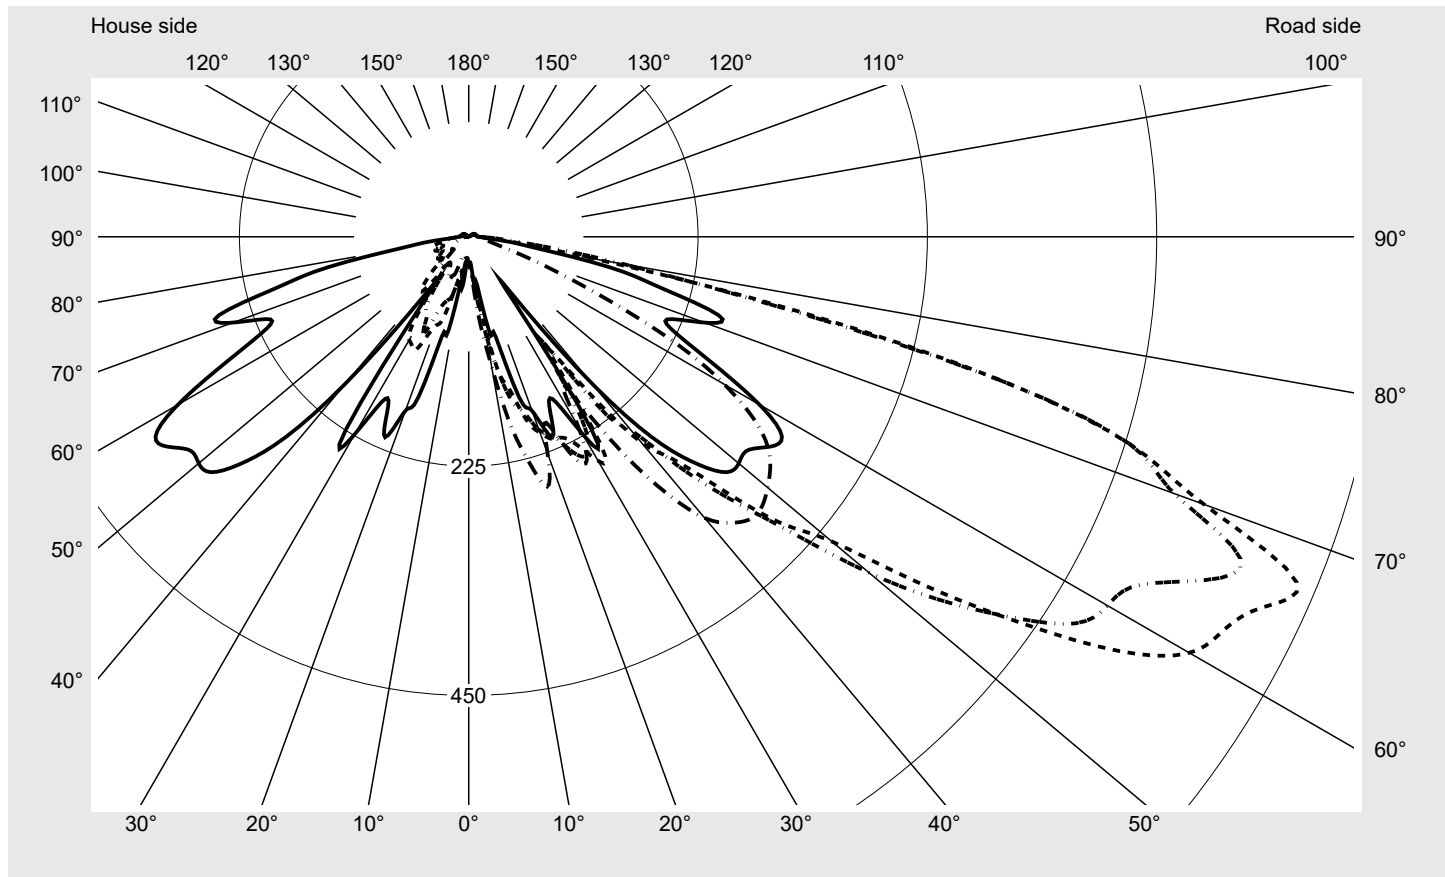

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.4%
Eta 90° - 180°	2.6%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	767.4
Imax 80°	154.8
Imax 90°	11.0
Imax >90°	10.7
Imax >95°	10.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245KF14H EAN: 4058352834558	LP number 57124_31
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

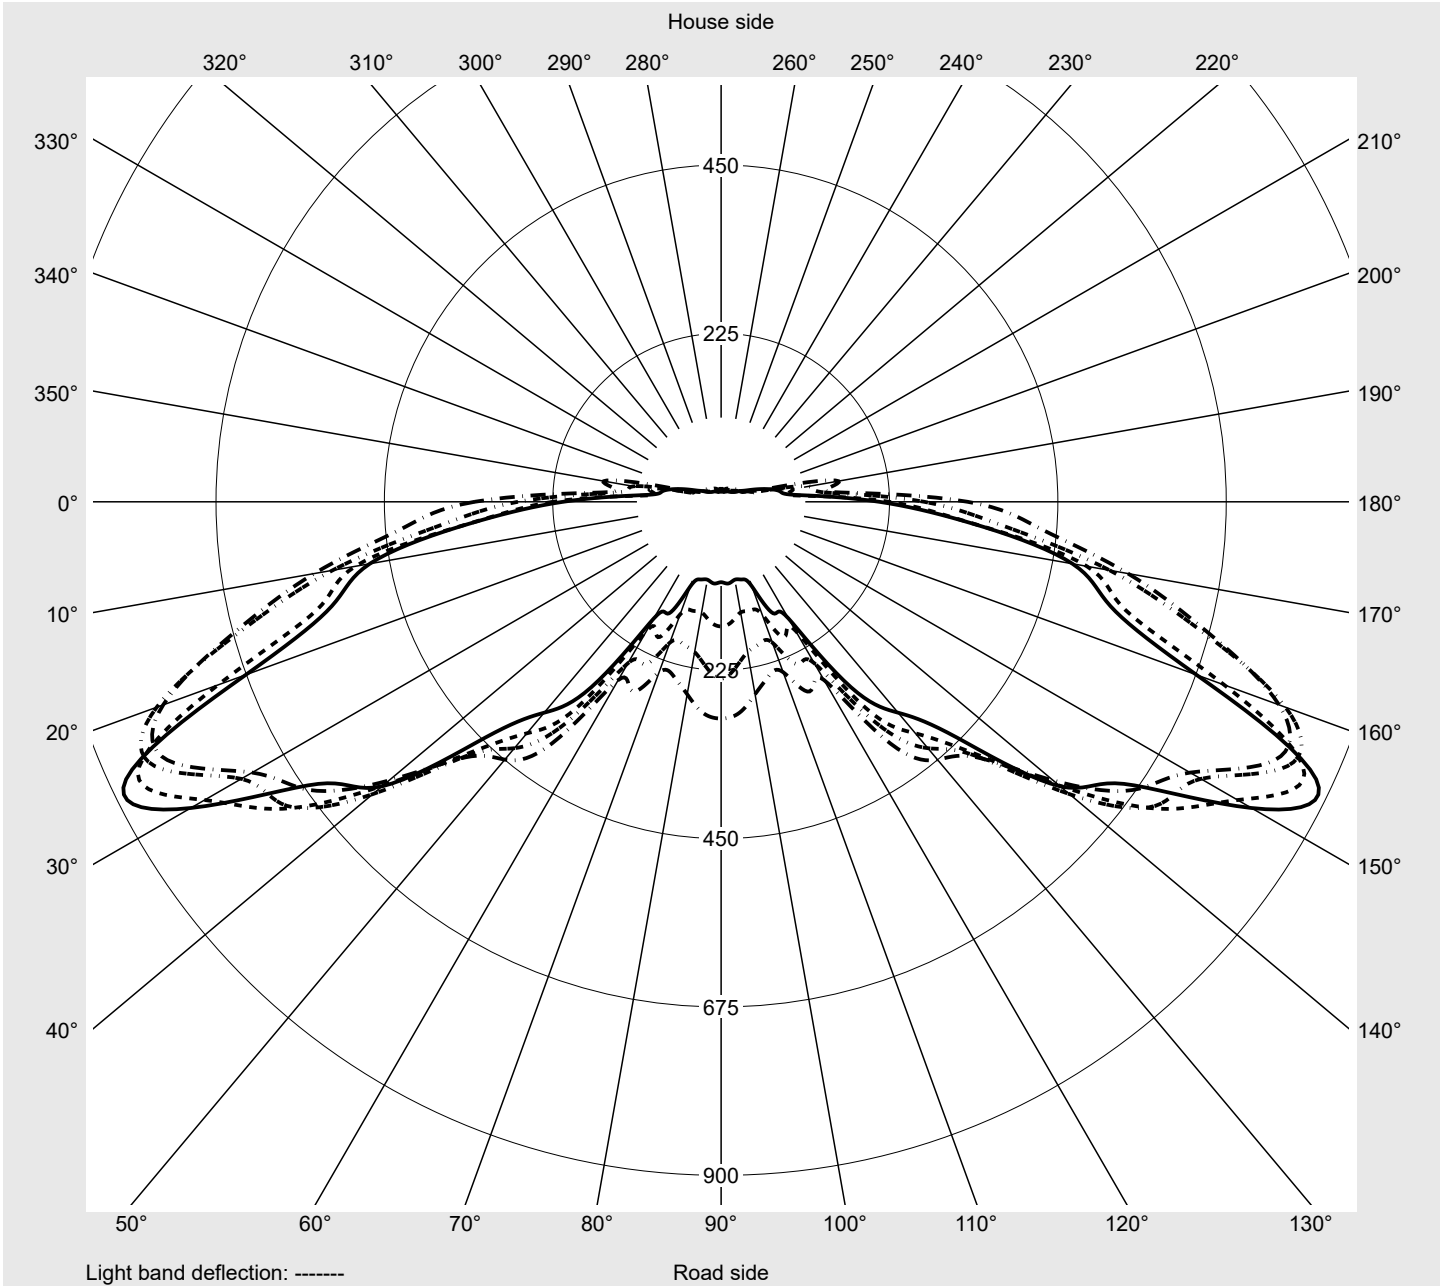

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245KF14H EAN: 4058352834558	LP number 57124_31
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9
2,5°	25.6	25.6	26.0	26.3	26.7	27.0	27.8	28.5	29.2	29.9	30.6	31.0	31.0
5,0°	30.6	32.4	33.8	35.6	36.6	37.0	38.4	39.5	40.2	41.3	40.9	40.9	41.3
7,5°	50.5	52.7	52.3	54.4	57.6	57.3	60.8	60.8	63.0	64.8	64.0	62.3	60.8
10,0°	49.5	59.1	68.7	79.0	80.8	86.1	98.2	105.7	113.1	114.9	111.4	97.8	91.8
12,5°	97.8	107.8	118.5	122.7	135.9	136.3	137.7	141.3	142.7	139.1	132.7	126.3	127.4
15,0°	100.0	143.7	148.7	175.8	170.4	155.5	169.0	180.7	191.1	198.5	177.9	169.4	161.5
17,5°	166.5	142.7	153.3	183.6	190.7	188.6	181.1	197.8	204.6	205.6	213.8	191.8	191.4
20,0°	181.5	198.5	214.9	222.7	250.8	204.6	201.7	189.3	197.1	194.3	209.6	190.4	189.6
22,5°	212.8	232.7	239.1	227.0	232.3	214.9	209.2	198.9	202.4	192.1	217.7	204.6	200.3
25,0°	188.9	181.8	180.0	186.1	200.3	217.4	228.1	224.5	241.6	214.5	233.8	227.7	214.9
27,5°	180.4	192.5	208.9	217.0	225.9	230.2	243.4	233.4	258.7	229.8	233.0	209.6	210.3
30,0°	223.4	233.8	261.9	264.4	256.5	253.7	236.2	215.3	258.0	243.7	258.3	218.5	198.2
32,5°	224.5	218.5	217.7	200.0	216.7	239.1	189.6	151.2	167.9	160.8	192.5	194.3	189.6
35,0°	72.2	68.0	69.0	76.5	93.9	138.0	122.4	119.9	169.4	154.4	207.8	206.4	218.1
37,5°	82.2	94.3	127.4	148.7	170.1	189.3	213.8	209.2	227.7	215.6	250.8	232.7	228.8
40,0°	187.1	196.8	224.2	241.9	247.3	263.3	248.0	238.4	262.2	285.7	290.0	262.6	282.9
42,5°	268.3	270.4	285.3	287.5	285.3	295.3	306.7	303.8	309.9	355.1	380.7	328.8	354.0
45,0°	313.8	311.7	341.9	343.0	345.1	349.7	365.4	366.5	408.5	405.6	449.7	377.9	385.3
47,5°	341.9	355.8	408.5	418.1	428.7	416.3	429.1	412.7	450.8	447.9	474.6	405.2	396.0
50,0°	345.8	375.0	479.3	467.5	508.8	465.0	513.1	482.1	470.4	460.4	499.5	424.8	393.2
52,5°	344.4	375.0	472.9	499.9	572.1	559.3	587.1	558.2	487.8	474.6	496.7	424.8	377.5
55,0°	359.4	401.3	481.7	555.8	655.4	659.6	651.1	603.4	510.6	479.6	491.4	435.1	344.1
57,5°	364.3	436.9	523.4	618.4	746.5	756.4	705.9	629.4	542.6	489.2	474.3	410.2	322.0
60,0°	329.5	431.6	552.2	672.8	793.4	816.5	723.7	671.4	579.2	482.8	449.7	394.2	275.0
62,5°	271.5	381.8	527.3	662.8	802.7	835.4	740.4	708.4	607.7	479.6	429.8	360.1	249.1
65,0°	224.9	339.8	496.3	559.7	715.5	860.0	797.0	715.1	589.9	473.9	403.8	335.5	198.9
67,5°	211.3	338.7	476.8	538.7	676.0	877.4	818.3	657.2	591.3	445.5	367.9	302.4	180.0
70,0°	246.2	365.4	479.3	532.3	625.1	767.4	736.5	627.6	520.9	404.9	328.0	273.2	131.6
72,5°	258.0	381.1	446.2	523.7	619.8	683.5	682.8	547.9	417.3	335.5	262.6	219.2	120.6
75,0°	197.8	327.0	402.8	435.8	514.5	533.3	530.5	388.9	269.0	227.7	218.1	194.6	89.3
77,5°	149.1	227.7	250.1	290.3	323.4	309.2	292.1	207.8	175.4	164.4	160.1	159.0	91.1
80,0°	76.5	91.8	106.0	145.5	134.5	127.0	154.8	138.8	114.9	82.9	69.7	82.5	36.6
82,5°	44.5	48.4	53.0	80.8	65.8	54.8	77.6	95.7	74.0	50.9	31.0	23.1	16.0
85,0°	18.9	21.0	21.7	24.2	19.2	25.6	39.8	46.6	28.5	22.4	14.6	13.5	12.1
87,5°	12.8	13.2	13.2	14.2	15.3	16.7	21.7	18.5	17.4	14.6	11.7	11.4	10.7
90,0°	8.5	9.3	10.0	10.7	11.0	11.0	11.0	11.0	11.0	10.3	10.3	9.6	9.3
92,5°	8.5	9.3	9.6	10.3	10.3	10.7	10.3	10.3	10.3	10.0	9.6	9.6	9.3
95,0°	8.5	9.3	9.3	10.0	10.0	10.3	10.3	10.0	10.0	10.0	9.6	9.6	9.3
97,5°	8.5	8.5	9.3	9.3	9.6	10.0	10.0	9.6	9.3	9.3	9.3	9.3	9.3
100,0°	7.8	8.5	8.5	8.9	8.9	9.3	9.3	9.3	9.3	9.3	8.9	8.9	8.5
102,5°	7.1	7.8	7.8	8.2	8.2	8.5	8.5	8.5	8.2	8.5	8.5	8.5	8.5
105,0°	6.8	7.1	7.5	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8
107,5°	6.4	6.4	7.1	7.1	7.1	7.5	7.5	7.1	7.1	7.8	7.5	7.5	7.8
110,0°	5.7	6.4	6.4	6.4	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
112,5°	5.7	5.7	6.0	6.4	6.4	6.8	6.8	6.8	6.8	6.4	6.4	6.4	6.4

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245KF14H EAN: 4058352834558	LP number 57124_31
Table of values for luminous intensities		Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9
2,5°	31.3	31.3	31.7	31.7	31.3	31.3	25.3	25.3	24.9	24.5	24.5	24.2	24.2
5,0°	44.8	45.9	47.0	46.6	45.9	45.5	29.2	28.1	27.0	26.7	26.0	25.3	25.3
7,5°	59.4	61.2	67.6	74.4	82.5	85.4	45.2	40.2	35.6	31.7	28.8	26.7	24.9
10,0°	82.5	85.4	104.6	115.6	125.2	128.8	47.7	47.7	51.6	53.4	50.5	39.1	30.2
12,5°	127.4	134.8	154.4	169.0	181.8	188.6	73.3	79.3	69.7	52.7	43.1	30.2	34.2
15,0°	165.8	164.7	181.1	210.6	224.9	229.1	85.0	68.0	60.1	60.5	55.1	55.1	68.0
17,5°	195.7	195.0	207.8	239.4	253.3	256.9	139.1	80.4	103.9	89.7	84.7	64.4	75.4
20,0°	201.0	186.8	182.2	214.5	225.9	226.3	165.8	86.1	128.1	113.1	92.2	68.7	72.2
22,5°	211.7	188.2	169.4	187.9	196.0	197.1	187.1	103.9	144.1	119.9	103.5	81.1	65.8
25,0°	223.1	213.1	204.9	232.0	234.8	232.7	173.6	80.8	143.4	142.7	122.0	104.2	72.9
27,5°	232.0	219.5	211.7	243.0	251.2	249.8	142.7	59.8	132.7	119.5	120.6	89.3	65.8
30,0°	212.4	197.5	189.3	206.4	213.1	214.9	174.0	49.1	133.1	117.8	116.7	83.6	58.7
32,5°	188.9	183.2	185.0	190.7	181.1	172.9	173.3	70.8	154.4	120.3	103.9	71.5	44.1
35,0°	226.6	197.1	195.7	228.1	240.5	244.8	86.8	53.7	94.3	75.8	65.5	43.4	35.9
37,5°	243.0	237.0	249.1	295.0	310.6	314.5	73.6	52.7	53.0	49.5	43.1	33.1	27.0
40,0°	309.2	293.5	306.3	342.6	355.8	360.1	139.8	60.1	105.7	90.4	68.0	38.8	29.2
42,5°	378.9	335.5	336.6	371.1	377.9	380.7	176.1	104.2	145.9	114.9	67.6	38.8	35.9
45,0°	411.3	343.7	367.5	383.5	389.2	391.4	229.5	131.3	179.7	126.7	56.6	37.0	42.7
47,5°	414.9	355.8	373.6	385.0	389.2	390.7	193.9	137.7	183.9	108.9	44.5	37.7	45.5
50,0°	407.7	344.1	370.4	377.1	382.1	382.8	200.0	145.5	190.7	82.9	33.4	36.3	42.3
52,5°	373.2	325.6	354.0	363.3	371.8	372.9	195.3	145.9	184.7	62.3	34.9	36.3	38.4
55,0°	345.8	301.7	327.3	339.4	353.7	357.9	190.7	166.2	163.0	48.7	32.0	37.0	35.6
57,5°	312.4	274.0	292.8	307.4	324.8	330.9	182.5	150.5	115.6	43.8	29.9	33.8	32.0
60,0°	279.7	242.3	242.3	261.2	282.9	289.6	149.4	159.0	73.3	43.4	30.6	30.6	28.8
62,5°	239.4	200.3	196.8	203.9	222.4	236.2	141.3	119.2	54.1	38.4	31.3	28.5	25.6
65,0°	199.6	160.1	150.5	150.1	161.2	166.5	98.2	97.1	55.9	39.8	32.7	28.5	24.2
67,5°	164.4	120.3	107.5	105.7	109.6	107.5	103.5	80.1	65.5	48.4	35.6	28.8	23.1
70,0°	134.1	90.4	64.4	64.4	65.8	67.6	104.2	88.2	70.1	46.6	33.8	26.7	22.1
72,5°	102.8	71.5	44.5	39.5	38.4	39.8	124.5	88.6	61.6	40.2	35.6	26.7	21.3
75,0°	76.5	42.0	31.7	27.8	26.3	26.3	80.8	69.7	52.3	39.8	37.0	27.0	21.7
77,5°	57.6	27.8	23.1	21.0	19.9	19.9	71.5	51.9	40.9	37.4	31.3	25.6	21.0
80,0°	21.0	17.4	16.7	16.0	16.4	16.4	48.7	41.3	33.1	34.2	28.5	25.3	20.6
82,5°	14.2	13.2	13.2	12.8	13.5	13.5	31.0	28.8	24.2	24.5	23.1	19.9	16.7
85,0°	12.1	11.7	11.7	11.7	12.1	12.1	16.4	16.0	19.9	21.7	19.2	16.7	13.9
87,5°	10.7	10.7	10.7	10.7	11.4	11.4	12.5	11.7	13.2	14.2	12.1	11.7	11.0
90,0°	10.0	10.0	10.0	10.0	10.0	10.0	8.2	7.8	7.8	7.1	7.1	6.8	6.4
92,5°	9.3	10.0	10.0	10.0	10.0	10.0	7.8	7.8	7.8	7.1	7.1	7.1	6.8
95,0°	9.3	9.3	9.6	10.0	10.0	10.0	7.8	7.8	7.8	7.1	7.1	7.1	6.8
97,5°	9.3	9.3	9.3	9.3	9.6	10.0	7.8	7.8	7.5	7.1	7.1	7.1	6.8
100,0°	8.9	8.9	8.9	9.3	9.3	9.3	7.5	7.1	7.1	7.1	6.8	6.4	6.4
102,5°	8.5	8.5	8.5	8.5	8.9	8.5	7.1	6.4	6.4	6.4	6.4	6.4	5.7
105,0°	7.8	8.5	8.5	8.5	8.5	8.5	6.4	6.4	6.4	6.0	5.7	5.7	5.7
107,5°	7.8	7.8	7.8	7.8	7.8	7.1	6.0	5.7	5.7	5.7	5.0	5.0	5.0
110,0°	7.1	7.1	7.5	7.1	7.5	7.1	5.7	5.0	5.0	5.0	5.0	5.0	5.0
112,5°	6.8	7.1	7.1	7.1	6.8	5.0	5.0	5.0	5.0	5.0	5.0	5.0	4.3

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245KF14H EAN: 4058352834558	LP number 57124_31
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	0.0	0.0
2,5°	23.8	23.1	22.4	22.4	21.7	21.7	21.7	21.3	21.3	21.0	21.3	0.3	0.4
5,0°	24.5	24.2	23.1	22.4	22.1	21.7	21.7	21.3	21.3	21.0	21.3	0.8	1.1
7,5°	24.2	23.5	22.4	21.7	21.7	21.3	21.3	21.3	21.0	21.0	20.6	1.6	2.7
10,0°	24.9	23.5	22.8	21.7	21.0	21.0	20.6	20.6	20.3	20.3	19.9	3.0	5.7
12,5°	39.8	39.8	31.0	24.9	22.1	21.3	20.3	19.9	19.6	19.6	19.2	5.2	11.0
15,0°	54.4	43.4	47.0	51.2	42.3	32.0	23.5	21.7	21.0	20.3	19.9	7.9	18.9
17,5°	64.4	53.4	45.2	41.6	37.7	35.6	39.5	34.2	29.2	23.8	20.6	10.7	29.6
20,0°	59.8	51.2	43.1	43.1	42.7	39.8	36.6	32.0	26.3	31.7	37.7	12.8	42.4
22,5°	56.2	43.1	40.2	39.1	39.5	38.1	38.4	37.0	31.7	36.3	41.3	14.7	57.2
25,0°	59.8	42.0	37.7	37.7	38.1	39.1	44.1	43.4	34.9	42.7	47.0	16.9	74.1
27,5°	51.6	43.4	39.8	39.8	39.8	41.3	42.7	40.2	35.9	38.4	40.6	18.7	92.8
30,0°	48.0	45.9	42.3	40.9	40.6	39.8	41.6	40.2	33.1	35.6	37.0	20.6	113.4
32,5°	48.0	51.6	51.2	49.5	45.5	41.3	39.1	36.3	30.6	31.7	33.4	19.5	132.8
35,0°	42.0	47.7	49.5	51.2	48.7	45.5	41.3	37.4	29.9	29.5	31.3	16.7	149.5
37,5°	28.8	38.1	44.1	49.1	48.7	45.9	43.1	39.5	31.0	29.9	32.7	21.5	171.0
40,0°	26.0	26.0	31.0	37.7	43.1	43.1	43.4	40.2	33.8	36.3	41.3	29.0	200.0
42,5°	34.5	28.1	24.9	24.2	29.2	34.2	37.7	37.0	35.6	38.8	41.3	36.3	236.3
45,0°	41.3	35.2	30.2	26.0	25.6	24.9	26.0	28.5	29.5	31.3	33.4	42.9	279.2
47,5°	41.6	35.2	31.3	28.8	27.8	24.2	22.8	22.4	21.7	23.1	24.2	48.0	327.2
50,0°	38.8	34.5	30.2	27.8	25.6	24.9	22.8	21.0	18.9	18.9	19.2	52.3	379.4
52,5°	35.6	32.0	29.2	26.7	25.3	22.8	21.3	20.3	19.2	19.6	20.6	55.4	434.8
55,0°	32.4	28.8	26.7	24.5	23.8	22.8	21.3	19.6	17.4	18.1	19.2	58.6	493.4
57,5°	29.2	26.3	23.8	22.4	22.1	21.3	20.3	18.5	17.1	17.4	17.8	61.1	554.5
60,0°	26.0	23.5	21.3	20.3	20.3	19.6	18.5	17.1	16.7	17.4	17.1	61.7	616.2
62,5°	23.1	21.0	19.6	18.9	18.5	18.1	17.1	15.3	15.7	16.0	16.4	59.9	676.0
65,0°	21.3	19.2	18.1	17.4	17.1	16.4	15.7	14.2	14.9	14.9	14.2	56.4	732.4
67,5°	20.3	18.5	17.4	16.7	16.0	14.9	14.2	13.5	13.9	13.5	13.5	54.1	786.5
70,0°	19.2	17.4	16.0	15.3	14.2	13.5	12.8	12.1	12.8	12.1	12.1	50.3	836.9
72,5°	18.5	16.0	14.6	13.9	12.8	12.1	11.4	11.0	11.0	10.7	10.7	46.1	883.0
75,0°	17.8	15.3	13.2	12.1	11.4	10.7	10.0	9.6	10.0	9.6	9.3	36.8	919.8
77,5°	17.1	14.2	11.7	11.0	10.3	9.6	8.9	8.5	8.5	8.5	8.5	24.9	944.7
80,0°	16.4	13.5	11.0	9.6	8.9	8.2	7.1	7.1	7.1	7.1	7.1	13.4	958.1
82,5°	14.6	11.7	9.6	8.2	7.5	6.8	6.0	5.7	5.7	5.0	5.0	7.9	966.0
85,0°	11.4	9.6	8.2	7.1	6.0	5.7	5.0	5.0	5.0	4.3	4.3	4.3	970.3
87,5°	9.3	7.8	6.8	6.0	5.3	5.0	4.3	4.3	4.3	3.6	3.6	3.0	973.3
90,0°	6.4	6.0	5.7	5.0	5.0	4.6	4.3	4.3	3.9	3.9	3.6	2.2	975.5
92,5°	6.4	6.4	6.0	5.7	5.3	5.3	5.0	5.0	4.3	4.3	4.3	2.2	977.7
95,0°	6.4	6.4	6.0	5.7	5.7	5.3	5.0	5.0	4.6	4.3	5.0	2.2	979.9
97,5°	6.4	6.0	6.4	6.0	5.7	5.3	5.0	5.0	4.3	4.3	4.3	2.1	982.0
100,0°	6.0	6.4	5.7	5.7	5.7	5.0	5.0	5.0	4.3	4.3	4.3	2.0	984.0
102,5°	5.7	5.7	5.7	5.0	5.0	5.0	4.3	4.3	4.3	3.9	4.3	1.9	985.9
105,0°	5.3	5.0	5.0	5.0	5.0	4.3	4.3	3.9	3.6	3.6	3.6	1.7	987.6
107,5°	5.0	5.0	4.3	4.3	4.3	3.9	3.6	3.6	2.8	2.8	2.8	1.6	989.1
110,0°	4.6	4.3	4.3	4.3	3.9	3.6	3.6	2.8	2.8	2.8	2.8	1.5	990.6
112,5°	4.3	4.3	4.3	3.9	3.6	3.6	3.2	2.8	2.8	2.8	2.1	1.3	991.9

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245KF14H EAN: 4058352834558	LP number 57124_31
---	--	-------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
117,5°	6.0	8.2	5.7	5.7	5.7	6.0	6.0	6.0	5.7	5.7	6.0	6.4	6.4
120,0°	5.0	5.0	5.0	5.0	5.3	5.7	5.3	5.3	5.3	5.3	5.7	5.7	5.7
122,5°	4.3	5.0	5.0	5.0	5.0	5.0	5.3	5.0	5.0	5.0	5.3	5.7	5.7
125,0°	4.6	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.6
127,5°	2.8	3.2	3.2	3.2	2.8	3.6	3.2	3.6	3.2	3.6	3.6	3.6	3.6
130,0°	2.5	2.8	2.5	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.5
132,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	2.1	2.1	2.1	2.1	2.1	2.1	1.8	1.8	2.1	2.1	1.8	2.1	2.1
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	1.4	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245KF14H EAN: 4058352834558	LP number 57124_31
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.4	6.4	6.8	7.1	5.7	2.8	5.0	5.0	5.0	4.6	4.3	4.3	4.3
117,5°	6.4	6.4	6.4	6.4	5.0	2.8	5.0	5.0	4.3	4.3	4.3	4.3	4.3
120,0°	5.7	5.7	5.7	5.7	4.3	2.1	4.3	4.3	4.3	4.3	4.3	4.3	3.6
122,5°	5.7	5.7	5.7	5.7	3.6	1.4	4.3	4.3	4.3	3.9	3.6	3.6	3.6
125,0°	5.0	5.0	5.0	5.0	2.8	1.4	3.6	3.6	3.6	3.6	3.6	3.6	3.6
127,5°	3.6	3.6	3.6	3.6	2.1	1.4	2.8	2.8	2.8	2.8	2.8	2.8	2.8
130,0°	2.5	2.5	2.1	2.1	1.4	1.4	2.5	2.1	2.8	2.1	2.1	2.1	2.1
132,5°	2.1	2.1	2.1	2.1	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	2.1	2.1	1.8	1.4	1.1	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
137,5°	1.4	1.4	1.4	1.4	0.7	0.7	1.8	1.8	1.8	1.4	1.8	1.8	2.1
140,0°	1.1	1.4	1.4	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.1	1.4	1.4	1.4	1.4	1.4
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	1.4	0.7	1.4
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	1.1
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.3	4.3	4.3	3.9	3.6	3.6	3.2	2.8	2.8	2.5	2.1	1.3	993.2
117,5°	4.3	4.3	3.6	3.6	3.6	3.6	2.8	2.8	2.8	2.1	2.1	1.2	994.4
120,0°	3.6	3.6	3.6	3.6	3.6	2.8	2.8	2.8	2.1	2.1	2.1	1.0	995.4
122,5°	3.6	3.6	3.6	3.6	3.2	2.8	2.8	2.8	2.1	1.8	1.4	1.0	996.4
125,0°	3.6	2.8	2.8	2.8	2.8	2.8	2.5	2.1	2.1	1.8	1.4	0.8	997.2
127,5°	2.8	2.8	2.8	2.8	2.5	2.5	2.1	2.1	1.8	1.4	1.4	0.6	997.9
130,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.4	1.4	1.4	0.5	998.3
132,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.4	1.4	1.4	0.4	998.7
135,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.4	1.4	1.4	1.4	0.4	999.1
137,5°	1.8	1.8	1.8	1.8	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.4
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.1	1.4	0.7	0.2	999.6
142,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.1	1.1	1.1	0.7	0.7	0.2	999.8
145,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.1	0.7	0.7	0.7	0.7	0.1	999.9
147,5°	1.1	1.1	0.7	0.7	1.1	0.7	0.7	0.7	0.7	0.7	0.7	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245KF14H EAN: 4058352834558	LP number 57124_31
---	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1380	10.0	10.4	10.2
95	241	252	1309	9.5	9.9	9.7
90	229	250	1244	9.0	9.3	9.2
85	216	248	1174	8.5	8.8	8.6
80	203	246	1103	8.0	8.3	8.2
75	190	243	1032	7.6	7.7	7.6
70	178	241	967	7.1	7.3	7.2
65	165	238	896	6.6	6.8	6.7
60	152	235	826	6.1	6.4	6.2
55	140	232	761	5.7	5.9	5.8
50	127	229	690	5.3	5.5	5.4
45	114	225	619	4.8	5.0	4.9
40	102	221	554	4.4	4.6	4.5
35	89	216	484	4.0	4.1	4.0
30	76	210	413	3.6	3.7	3.6
30	75	209	407	3.5	3.7	3.6