

Photometric test report

Family
Floodlight 20 mini LED

Order number: 5XA7672C1D4AC
EAN: 4058352259535

LP number
58553_14



Version mast flange adapter
Optic asymmetric distribution PL52
Cover toughened safety glass
Lamps 1 x LED 3000K / CRI ≥ 80
 (unbekannt LED 3000K / CRI = 80)
Controlgear ECG-DALI
Rated values Net luminous flux = 9640 lm
 Power consumption = 95.8 W
 Luminous efficacy = 100.6 lm/W

serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C220-40

C270-90

Imax: 827 cd/klm

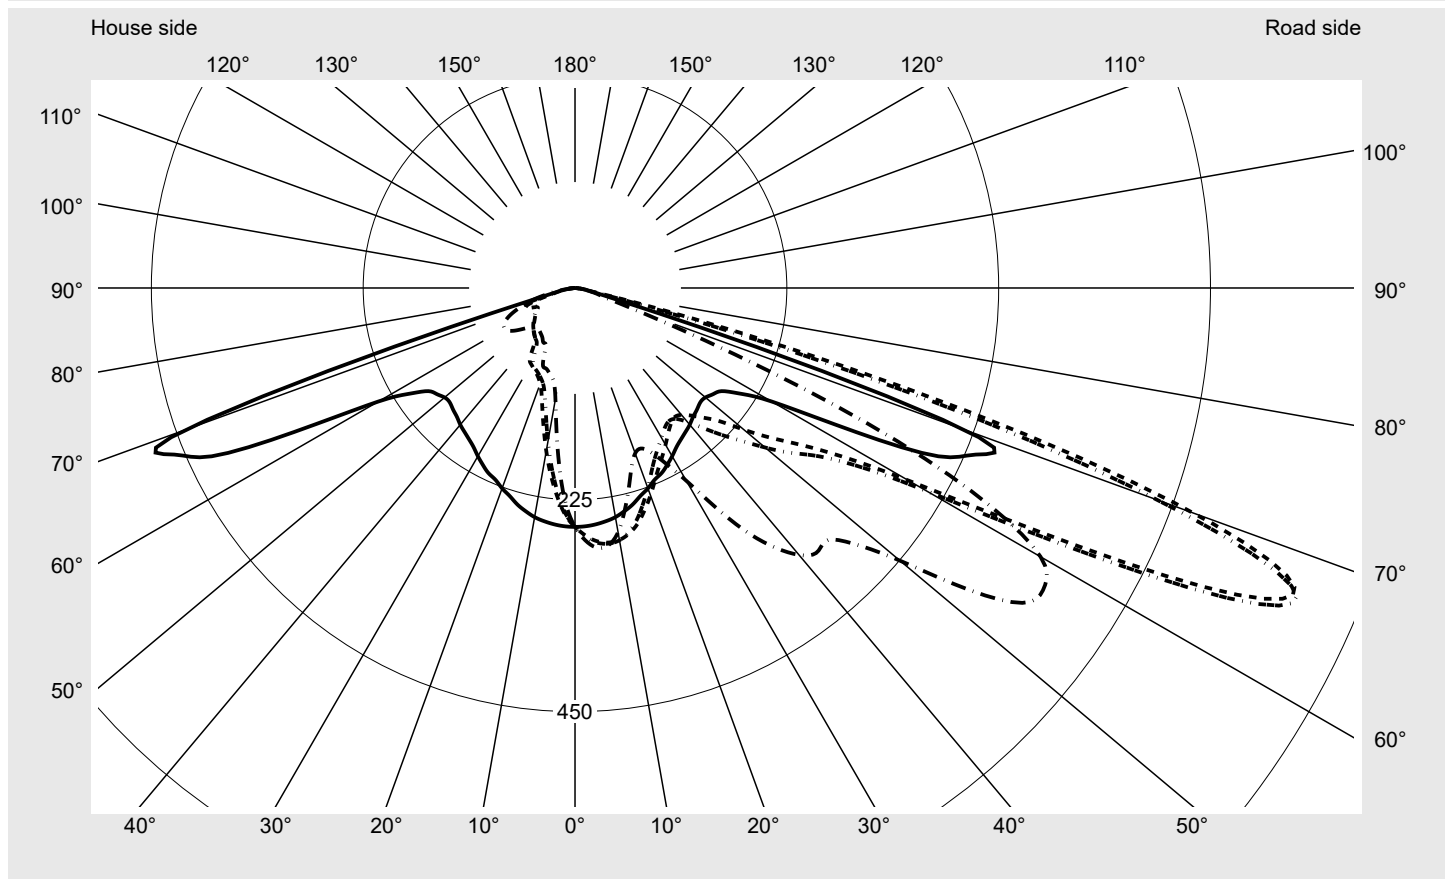

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	767.0
Imax 80°	23.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672C1D4AC EAN: 4058352259535	LP number 58553_14
--	---	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

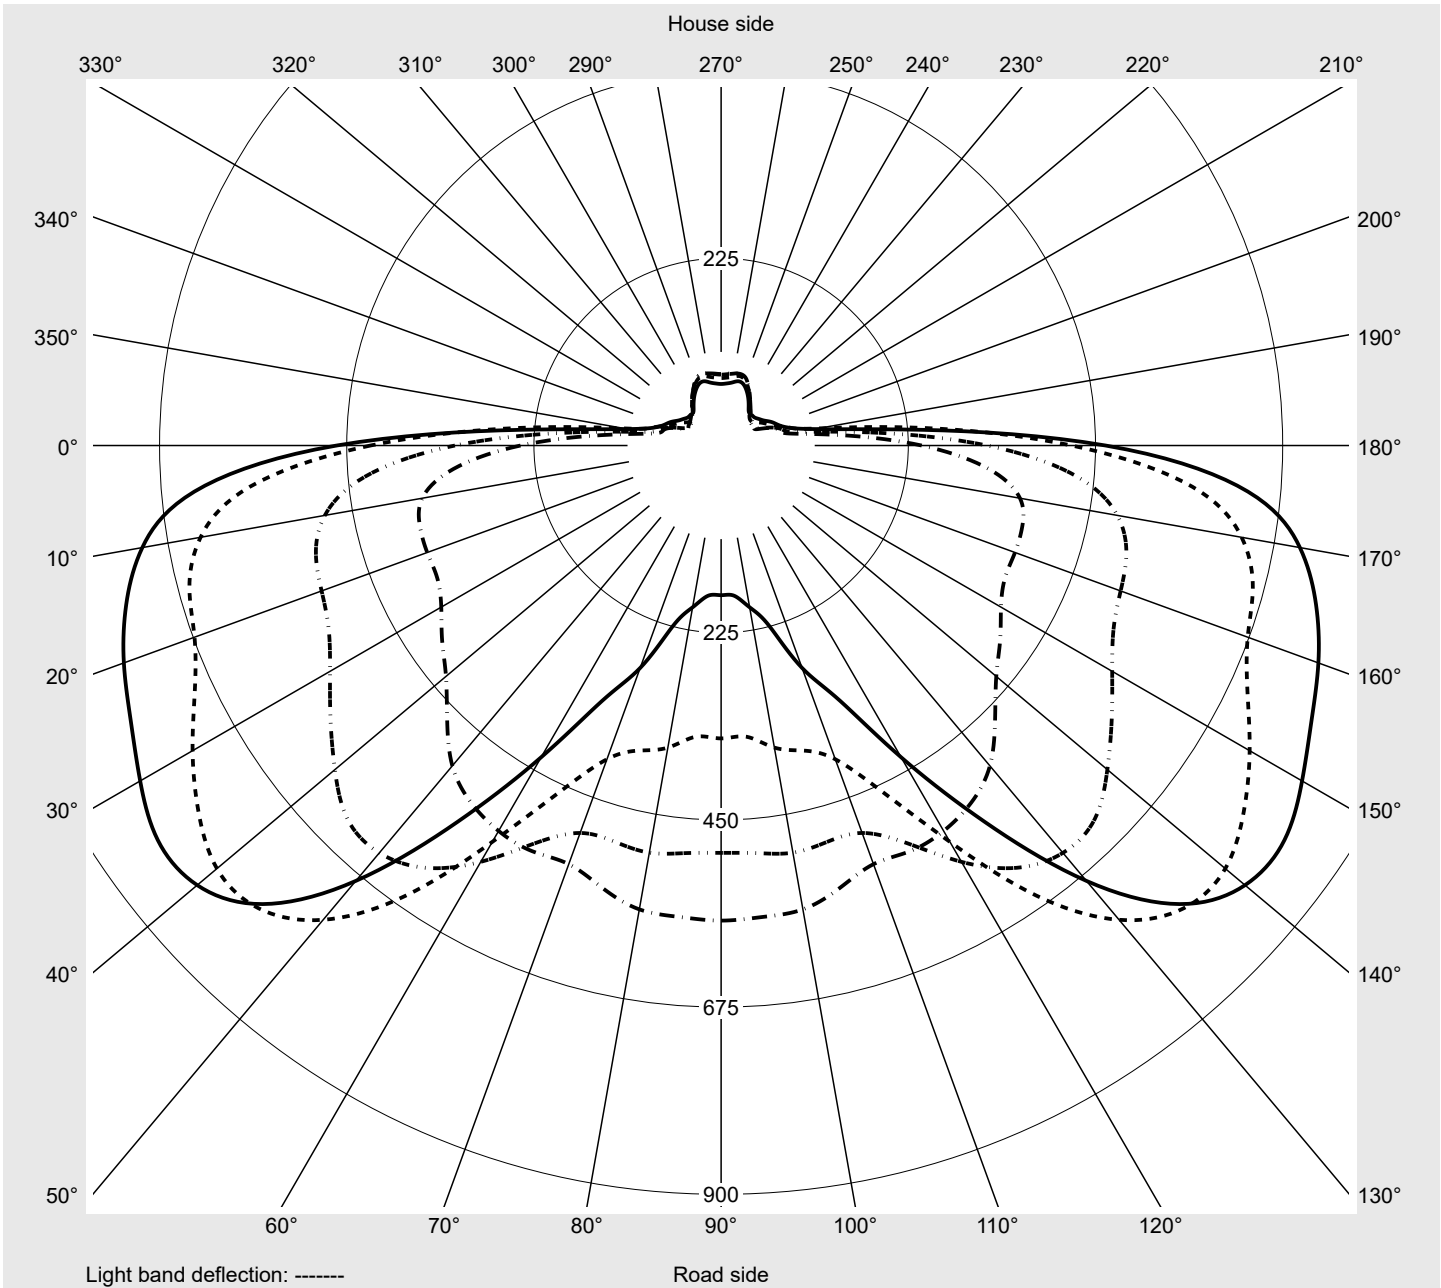

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672C1D4AC EAN: 4058352259535	LP number 58553_14
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	253.4	254.9	256.4	258.0	259.5	261.1	262.4	263.4	264.5	265.4	266.3	266.9	267.4
5,0°	252.0	255.2	258.3	261.1	263.7	266.3	268.4	270.1	271.6	272.8	273.7	274.6	275.2
7,5°	249.9	254.7	259.0	262.7	265.9	268.8	271.0	272.7	273.9	274.6	275.1	275.5	275.5
10,0°	247.1	253.2	258.3	262.6	266.1	268.7	270.7	271.8	272.0	271.6	270.6	269.4	267.8
12,5°	242.8	250.3	256.3	260.8	264.0	266.2	267.2	266.9	265.2	262.4	259.1	255.6	252.1
15,0°	237.8	246.4	253.0	257.5	260.3	261.5	261.0	258.6	254.4	249.3	243.9	238.7	233.5
17,5°	231.4	241.9	248.9	253.2	255.1	254.7	251.9	246.8	240.3	233.3	226.3	219.9	214.0
20,0°	226.5	237.3	244.7	248.7	249.4	247.0	241.7	234.4	226.2	217.9	210.2	203.6	198.3
22,5°	220.6	233.3	240.9	244.1	243.3	238.5	230.9	221.6	211.9	203.1	195.7	190.4	186.7
25,0°	217.2	230.8	238.8	241.4	238.8	231.5	221.3	210.4	200.2	191.7	186.1	183.2	182.9
27,5°	211.9	228.0	237.0	239.2	235.0	225.4	213.2	201.1	191.1	184.3	181.2	182.4	186.4
30,0°	206.3	222.9	232.5	234.4	229.0	218.0	204.9	192.3	183.6	179.2	180.9	187.1	195.9
32,5°	200.5	218.7	228.7	229.0	221.2	208.7	195.3	183.8	176.9	177.0	184.1	197.2	213.7
35,0°	196.2	216.1	227.0	225.9	216.5	202.5	188.2	177.1	173.1	178.5	193.9	217.2	243.3
37,5°	192.8	214.5	225.3	223.2	212.3	197.3	182.7	173.2	175.3	188.7	214.0	245.7	277.7
40,0°	189.6	213.1	223.4	221.9	210.0	194.2	180.3	175.9	185.7	207.5	240.4	277.4	310.3
42,5°	185.7	211.7	222.8	221.5	208.9	192.7	181.7	184.0	201.8	231.7	270.0	304.6	334.6
45,0°	183.0	210.3	223.6	222.1	209.1	193.9	187.2	195.2	220.8	254.0	286.5	314.9	338.2
47,5°	180.3	212.5	227.7	225.4	212.0	199.0	194.8	210.1	240.6	271.7	299.3	321.7	340.0
50,0°	180.9	217.4	236.4	236.0	222.7	210.3	212.6	234.2	263.6	291.2	311.5	327.9	344.0
52,5°	185.1	227.1	248.8	248.6	237.5	229.9	238.2	261.0	287.4	309.3	325.3	338.1	360.6
55,0°	191.0	242.1	268.8	270.6	261.4	258.5	268.5	289.3	310.3	327.0	343.8	368.9	407.8
57,5°	209.2	271.8	303.8	307.5	302.1	301.4	312.0	330.2	348.5	367.0	400.1	440.6	473.6
60,0°	241.1	322.9	364.8	374.8	375.9	376.5	388.5	409.3	431.7	465.7	502.6	524.1	534.9
62,5°	320.0	429.7	483.6	504.3	511.0	520.5	542.8	573.2	606.0	635.1	639.1	619.6	577.8
65,0°	421.5	568.6	635.3	661.7	673.6	698.0	733.6	767.0	791.1	786.5	744.2	660.3	550.1
67,5°	462.2	635.6	706.4	740.4	764.0	783.0	806.3	826.7	822.1	779.5	683.1	552.0	432.7
70,0°	439.4	623.7	722.7	767.0	750.7	724.1	713.8	699.9	659.8	581.1	469.0	370.0	297.7
72,5°	145.9	232.6	294.5	375.4	459.3	476.0	466.3	444.0	388.2	309.7	247.5	213.0	182.8
75,0°	37.2	40.5	45.0	53.0	97.4	158.1	175.4	167.3	114.0	78.9	104.0	105.0	101.6
77,5°	20.7	22.2	22.7	23.3	27.5	36.2	40.8	28.4	24.8	24.4	34.4	39.0	40.2
80,0°	12.0	11.3	11.0	11.2	12.5	15.0	15.0	13.6	13.3	14.0	15.0	15.3	17.0
82,5°	6.5	6.1	6.1	6.4	6.7	7.4	8.2	7.9	8.1	8.3	8.4	8.3	9.7
85,0°	2.9	2.6	2.6	2.7	2.9	3.3	3.5	3.6	3.7	3.7	3.7	3.5	3.4
87,5°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672C1D4AC EAN: 4058352259535	LP number 58553_14
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	267.8	268.1	268.4	268.7	269.0	269.1	251.7	249.8	248.0	246.2	244.3	242.6	240.9
5,0°	275.6	275.9	276.3	276.7	277.0	277.2	248.2	244.0	239.6	235.0	230.4	225.8	221.2
7,5°	275.3	275.0	274.9	275.0	275.2	275.3	244.1	237.5	230.3	222.6	214.9	207.0	199.0
10,0°	266.2	264.6	263.6	263.3	263.3	263.4	239.2	230.0	219.9	209.1	197.8	186.7	175.8
12,5°	248.8	245.9	244.1	243.2	242.9	242.8	233.0	221.3	208.1	194.3	180.0	166.3	153.4
15,0°	229.0	225.2	222.6	221.2	220.6	220.5	225.8	211.4	195.4	178.7	162.2	147.1	133.8
17,5°	208.9	204.9	202.1	200.5	199.8	199.6	218.1	201.1	182.2	163.2	145.3	130.0	118.1
20,0°	194.2	190.6	188.5	187.4	186.9	186.9	210.5	191.0	169.3	148.6	130.5	116.8	108.2
22,5°	184.6	183.4	183.1	183.6	184.2	184.5	203.2	181.1	157.2	135.5	118.4	107.6	102.4
25,0°	183.9	185.6	187.8	190.6	192.6	193.2	196.4	171.4	145.9	124.0	108.9	101.9	98.7
27,5°	191.2	195.9	201.2	207.0	210.4	211.0	189.8	162.2	135.0	114.2	102.5	98.0	95.9
30,0°	205.1	213.5	222.6	232.7	237.7	236.4	180.8	151.5	124.3	105.4	97.8	94.9	93.3
32,5°	230.0	245.0	259.2	272.2	276.6	274.1	173.5	141.9	114.7	99.0	94.1	92.1	89.3
35,0°	266.1	285.6	303.5	314.0	314.9	314.8	166.4	132.6	105.7	94.0	90.6	87.5	77.7
37,5°	302.9	322.5	336.8	344.3	344.8	346.7	159.8	124.3	99.1	90.5	86.2	78.6	69.8
40,0°	334.1	349.7	360.6	366.5	368.0	370.1	152.8	115.7	93.0	86.9	78.0	69.3	66.7
42,5°	355.7	366.5	373.9	378.8	379.7	380.7	146.0	108.2	88.4	83.7	69.4	64.4	64.2
45,0°	355.2	361.7	368.1	374.9	377.3	378.9	139.2	100.1	84.1	80.3	63.5	61.4	61.9
47,5°	355.8	364.3	376.0	391.6	399.1	402.5	134.3	94.7	80.7	77.3	60.3	58.8	59.5
50,0°	364.3	384.7	407.6	433.1	445.9	450.5	128.9	89.3	77.4	74.2	56.6	56.3	56.6
52,5°	395.5	433.8	469.8	502.4	520.5	526.0	127.0	85.5	75.0	71.2	53.7	53.7	53.9
55,0°	451.6	493.4	531.1	562.3	577.5	583.0	126.6	82.7	72.8	68.1	50.9	50.9	51.5
57,5°	505.1	534.7	563.2	583.5	589.7	591.1	130.5	81.8	71.5	64.9	48.4	48.1	48.7
60,0°	537.9	535.5	550.7	566.1	568.8	571.0	143.7	83.2	71.6	61.8	46.4	45.4	46.3
62,5°	527.1	495.6	493.1	496.9	491.8	489.6	180.3	94.3	75.5	63.3	49.3	45.8	44.7
65,0°	459.5	401.3	379.6	368.7	351.4	352.1	243.0	118.3	84.1	70.3	61.3	55.1	48.7
67,5°	338.8	284.5	225.0	197.5	181.3	179.9	221.0	113.9	83.3	72.8	66.8	59.9	55.6
70,0°	242.2	200.8	99.2	72.0	66.9	70.0	138.6	70.9	68.1	65.0	60.1	57.1	54.6
72,5°	153.6	125.3	46.7	33.4	33.1	33.4	51.7	32.6	30.8	31.9	33.7	38.5	41.9
75,0°	88.5	70.5	31.8	25.1	24.4	24.4	24.5	22.0	22.0	21.9	22.6	24.1	25.8
77,5°	35.9	33.1	21.4	17.3	16.4	16.6	16.0	15.4	16.0	16.0	16.6	17.6	18.8
80,0°	18.9	16.9	12.5	11.1	10.6	10.6	11.8	10.4	10.4	10.7	11.3	11.9	12.5
82,5°	11.3	9.5	6.6	5.8	5.4	5.4	6.5	5.9	6.2	6.6	7.1	7.3	7.5
85,0°	3.2	2.9	2.4	2.2	2.1	2.0	2.7	2.7	3.0	3.3	3.4	3.6	3.6
87,5°	0.8	0.8	0.8	0.8	0.9	0.9	1.1	1.2	1.2	1.2	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672C1D4AC EAN: 4058352259535	LP number 58553_14
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	0.4	0.4
2,5°	239.2	237.4	235.7	234.3	233.0	231.9	230.8	229.9	229.2	228.9	228.8	3.0	3.4
5,0°	216.6	212.2	208.0	204.2	200.8	198.0	195.3	193.3	191.8	191.1	190.8	5.8	9.2
7,5°	191.3	184.0	177.3	171.3	166.0	161.5	157.7	154.8	152.7	151.6	151.2	8.2	17.4
10,0°	165.6	156.3	148.0	140.8	134.8	129.9	126.0	123.1	121.2	120.1	119.8	10.3	27.7
12,5°	141.7	131.9	123.8	117.4	112.5	109.1	106.7	105.1	104.1	103.5	103.2	12.0	39.7
15,0°	123.0	114.7	109.2	105.6	103.1	101.2	99.7	98.5	97.8	97.3	97.2	13.5	53.2
17,5°	110.2	105.7	102.7	100.5	98.6	97.1	95.7	94.7	94.1	93.6	93.4	14.7	67.9
20,0°	103.7	101.0	99.1	97.4	95.9	94.4	93.1	92.2	91.5	91.1	90.8	15.9	83.8
22,5°	99.7	97.8	96.4	95.1	93.8	92.5	91.1	89.6	89.2	89.1	89.1	17.1	100.9
25,0°	96.8	95.4	94.0	93.1	91.4	85.6	79.7	77.9	77.3	76.9	76.6	18.2	119.1
27,5°	94.3	91.9	89.6	84.7	75.7	71.6	70.1	69.0	68.2	67.7	67.4	19.5	138.6
30,0°	88.9	83.4	79.2	72.9	71.1	70.3	69.5	68.7	67.9	67.3	67.0	21.0	159.6
32,5°	78.1	73.8	71.5	70.7	70.3	69.5	68.1	66.7	65.4	64.4	64.0	22.9	182.5
35,0°	70.8	70.1	69.9	69.6	68.3	66.7	65.1	63.9	62.8	62.1	61.7	25.1	207.6
37,5°	68.6	68.4	68.2	66.9	65.5	64.6	63.7	62.7	61.7	60.7	60.2	27.5	235.1
40,0°	66.6	66.6	65.6	64.6	64.0	63.2	62.6	61.9	60.8	59.7	59.0	30.0	265.1
42,5°	64.7	64.2	63.9	63.6	63.2	62.6	62.3	62.0	61.2	59.9	59.0	32.3	297.4
45,0°	62.3	62.5	62.8	62.7	63.0	63.3	63.4	63.0	62.3	61.0	59.9	34.0	331.4
47,5°	60.2	61.2	61.9	62.5	63.8	64.1	64.6	64.7	64.3	63.1	62.2	36.2	367.6
50,0°	57.7	59.3	61.1	62.1	64.0	65.2	66.6	67.6	67.6	66.6	66.0	39.4	407.0
52,5°	55.2	57.1	59.3	61.1	63.9	67.1	70.6	73.2	73.6	72.9	72.2	44.1	451.1
55,0°	52.8	54.9	57.6	60.6	64.8	70.4	76.4	80.6	80.3	79.6	79.1	49.5	500.6
57,5°	50.5	52.7	56.2	60.6	66.5	74.0	82.1	86.7	86.3	85.6	84.1	55.7	556.3
60,0°	48.1	50.9	55.3	61.1	68.7	77.7	86.5	89.1	88.1	86.8	85.9	63.4	619.7
62,5°	46.1	49.1	54.2	61.1	69.2	77.8	85.6	89.4	87.8	86.1	85.2	74.4	694.1
65,0°	46.4	48.2	53.2	60.1	68.5	76.8	83.7	86.3	83.9	82.0	81.1	84.5	778.5
67,5°	52.5	52.0	52.1	57.7	65.3	72.5	78.4	80.0	76.9	74.9	74.0	82.2	860.7
70,0°	54.5	58.5	57.0	53.9	59.7	65.6	69.8	70.5	67.6	65.1	64.4	69.4	930.2
72,5°	52.2	57.1	55.0	50.9	51.3	55.5	58.3	58.3	55.1	53.4	54.1	39.8	969.9
75,0°	28.6	36.9	40.3	39.0	41.6	44.9	46.8	46.1	43.2	41.5	42.5	15.6	985.6
77,5°	20.4	22.6	25.3	28.0	30.9	33.4	34.8	33.4	31.1	29.8	29.9	7.0	992.5
80,0°	13.6	15.1	17.0	19.0	21.0	22.4	23.0	21.8	20.4	19.5	19.3	4.0	996.5
82,5°	8.0	8.7	9.6	10.5	11.0	11.5	11.5	11.1	10.4	10.1	10.0	2.2	998.8
85,0°	3.6	3.8	4.1	4.4	4.7	5.0	5.2	5.0	4.7	4.6	4.5	1.0	999.7
87,5°	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672C1D4AC EAN: 4058352259535	LP number 58553_14
---	---	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9640	95.8
95	240	252	9158	90.4
90	225	250	8676	85.1
85	211	247	8194	79.8
80	197	245	7712	74.6
75	184	242	7230	69.6
70	171	239	6748	64.6
65	157	236	6266	59.7
60	143	233	5784	55.0
55	132	230	5302	50.3
50	118	226	4820	45.7
45	106	222	4338	41.1
40	93	217	3856	36.7
35	81	212	3374	32.4
30	69	206	2892	28.1
25	57	199	2410	23.9
20	46	191	1928	19.6
15	34	180	1445	15.6