

## Photometric test report

Family  
Floodlight FL21 mini

Order number: 5XA7772B5B1A  
EAN: 4058352654675

LP number  
59238\_58



Version	mounting bracket
Optic	symmetric distribution RS12
Cover	toughened safety glass
Lamps	LED 4000 K   CRI ≥ 80
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 5880 lm Power consumption = 45.5 W Luminous efficacy = 129.2 lm/W


serial  
documentation  
26.08.2022

siteco

Luminous intensity in cd/klm

C180-0

Imax: 2873 cd/klm

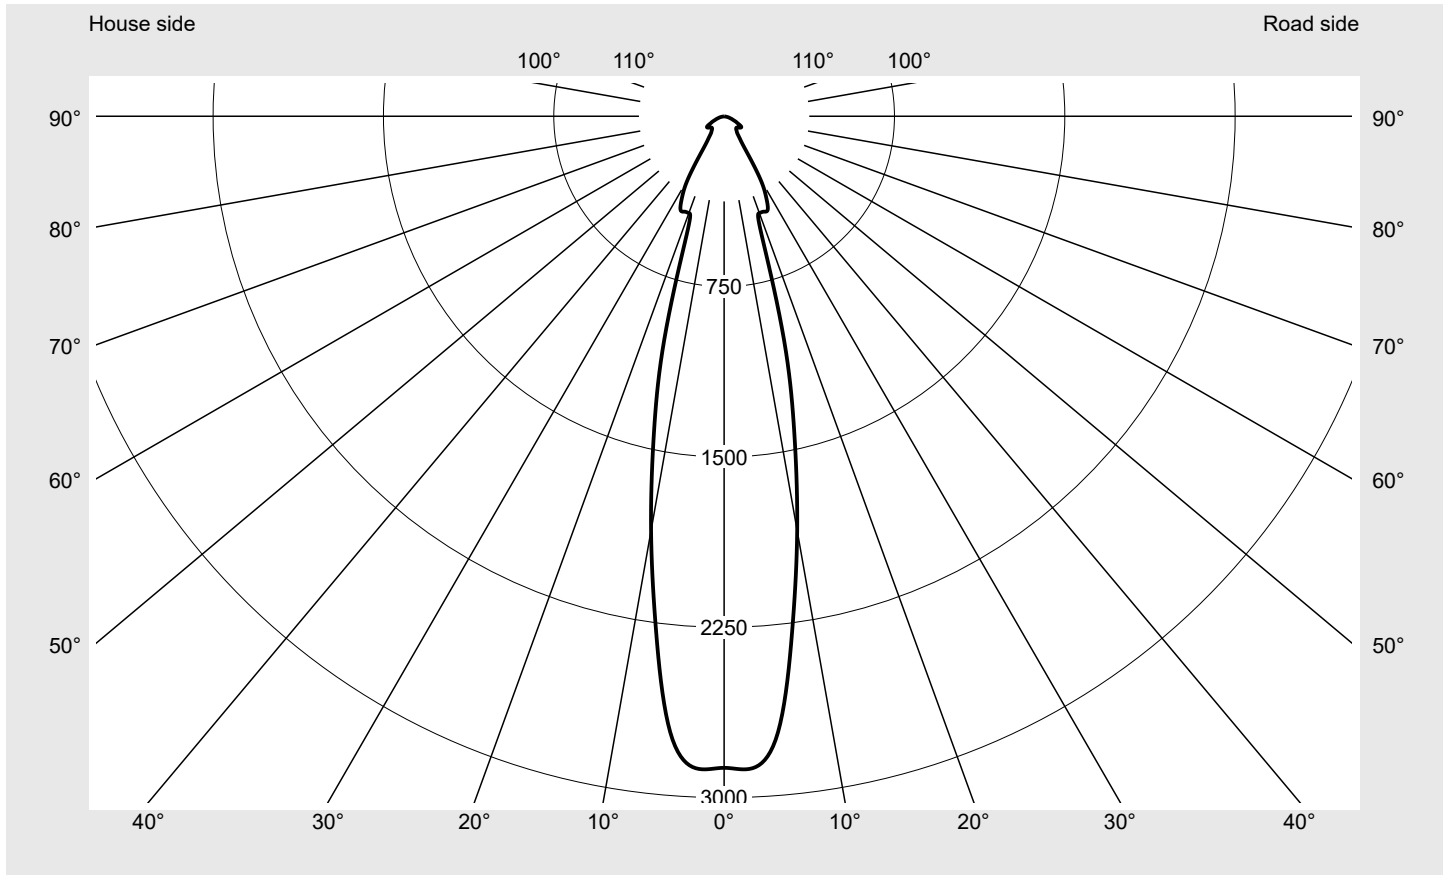

#### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

#### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


#### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Floodlight FL21 mini	<b>Order number: 5XA7772B5B1A</b> <b>EAN: 4058352654675</b>	<b>LP number</b> 59238_58
---------------------------------------	--	------------------------------

**Envelope curve in cd/klm** KMK 2.5°  KMK 0°  siteco

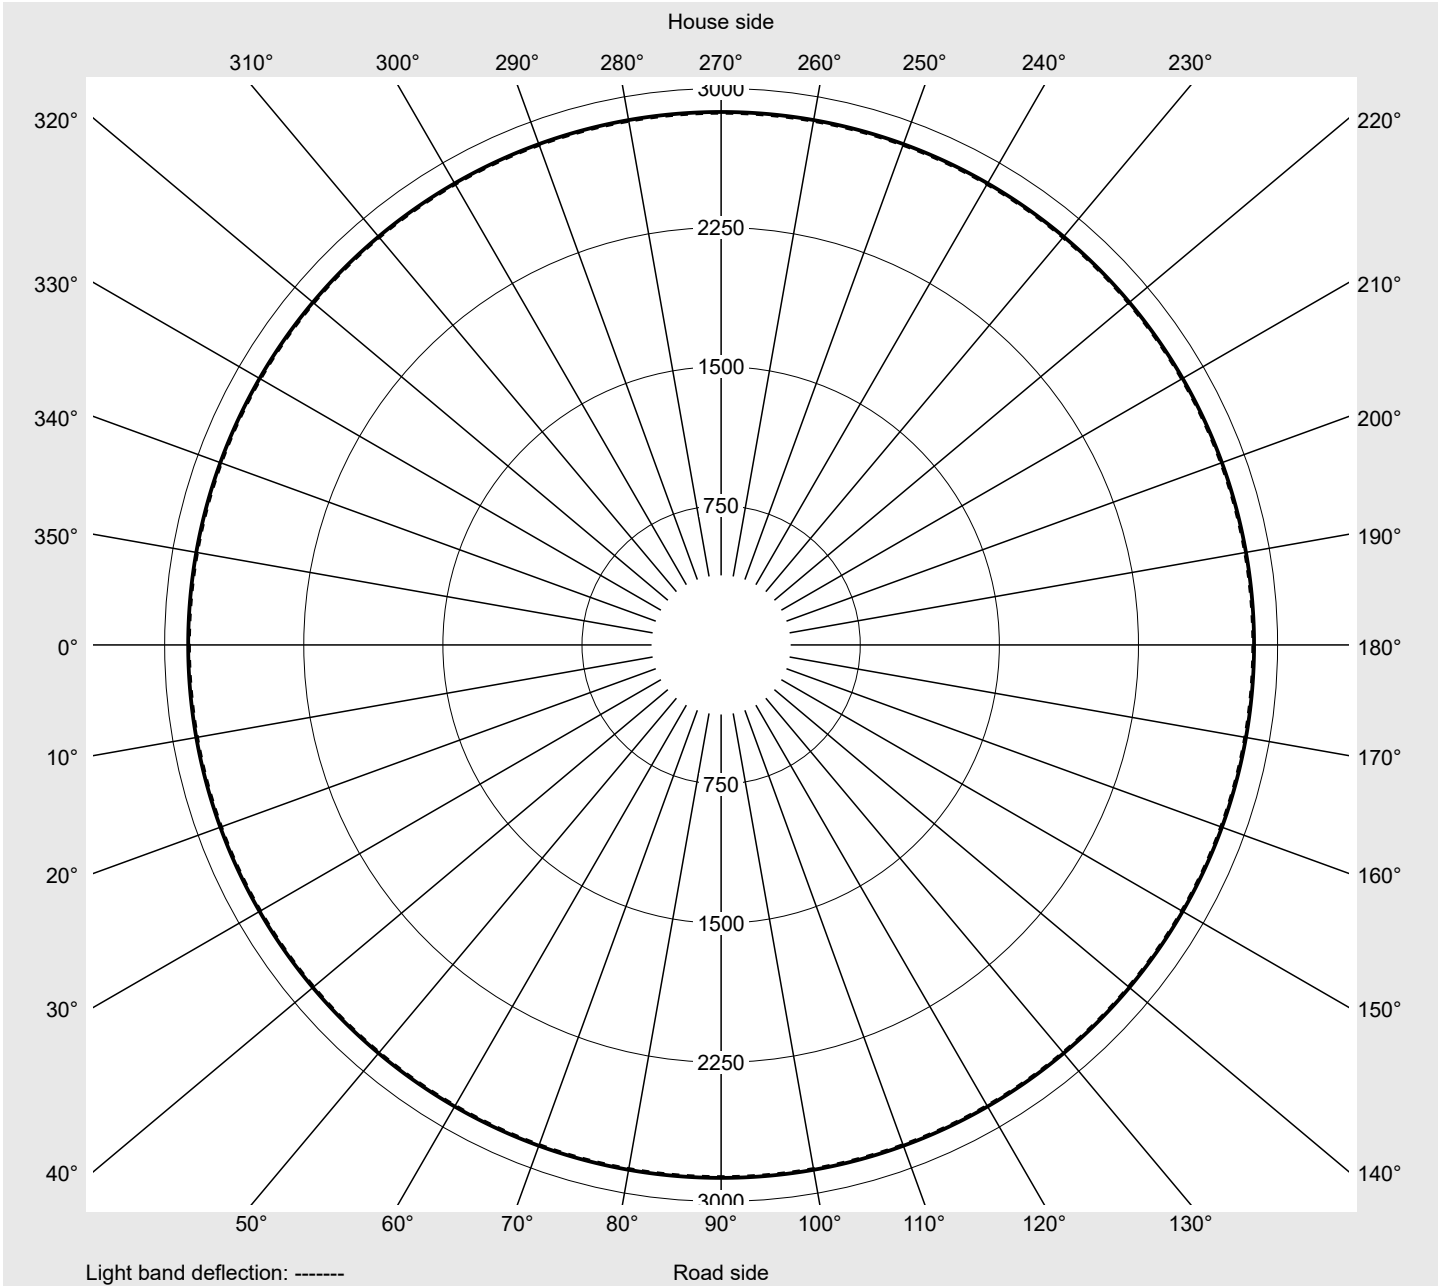

## Photometric test report

<b>Family</b> Floodlight FL21 mini	<b>Order number: 5XA7772B5B1A</b> <b>EAN: 4058352654675</b>	<b>LP number</b> 59238_58
---------------------------------------	--	------------------------------

**siteco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight FL21 mini	<b>Order number: 5XA7772B5B1A</b> <b>EAN: 4058352654675</b>	<b>LP number</b> 59238_58
---------------------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5880	45.5	48.0	46.8
95	241	252	5579	42.8	45.1	44.0
90	229	250	5301	40.3	42.5	41.4
85	216	248	5000	37.7	39.7	38.7
80	203	246	4699	35.1	37.0	36.0
75	190	243	4398	32.8	34.4	33.6
70	178	241	4121	30.5	32.1	31.3
65	165	238	3820	28.2	29.6	28.9
60	152	235	3519	25.8	27.2	26.5
55	140	232	3241	23.7	24.9	24.3
50	127	229	2940	21.5	22.6	22.0
45	114	225	2639	19.3	20.3	19.8
40	102	221	2361	17.4	18.2	17.8
35	89	216	2060	15.3	16.1	15.7
30	76	210	1759	13.3	13.9	13.6
25	63	203	1458	11.4	11.9	11.6
20	51	195	1181	9.5	9.9	9.7
15	39	185	903	8.2	8.3	8.2