

## Photometric test report

**Family**  
**Floodlight FL21 mini**

**Order number: 5XA7772C5B1A**  
**EAN: 4058352655672**

**LP number**  
**59238\_65**



<b>Version</b>	mounting bracket
<b>Optic</b>	symmetric distribution RS12
<b>Cover</b>	toughened safety glass
<b>Lamps</b>	LED 4000 K   CRI ≥ 80
<b>Controlgear</b>	ECG SITECO iQ
<b>Rated values</b>	Net luminous flux = 11510 lm Power consumption = 87.2 W Luminous efficacy = 132 lm/W


**serial**  
**documentation**  
**26.08.2022**

**siteco**

**Luminous intensity in cd/klm**

**C180-0**

**Imax: 2873 cd/klm**

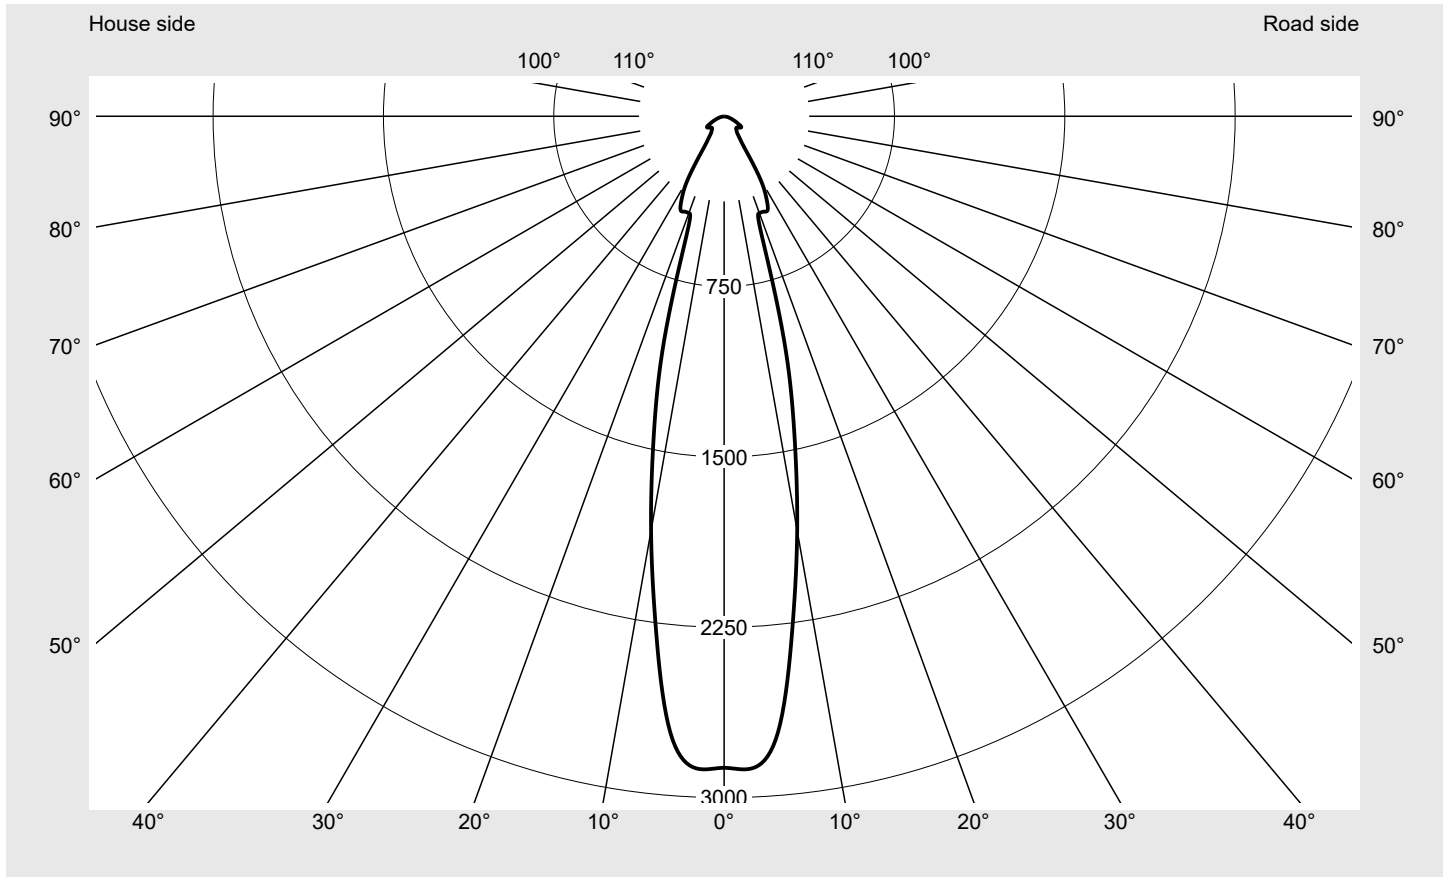

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


### Measurement conditions

DIN EN 13032 and DIN 5032

# Photometric test report

<b>Family</b> <b>Floodlight FL21 mini</b>	<b>Order number: 5XA7772C5B1A</b> <b>EAN: 4058352655672</b>	<b>LP number</b> <b>59238_65</b>
--	--	-------------------------------------

<b>Envelope curve in cd/klm</b>	<b>KMK 2.5°</b>	<b>KMK 0°</b>	
---------------------------------	-----------------	---------------	--

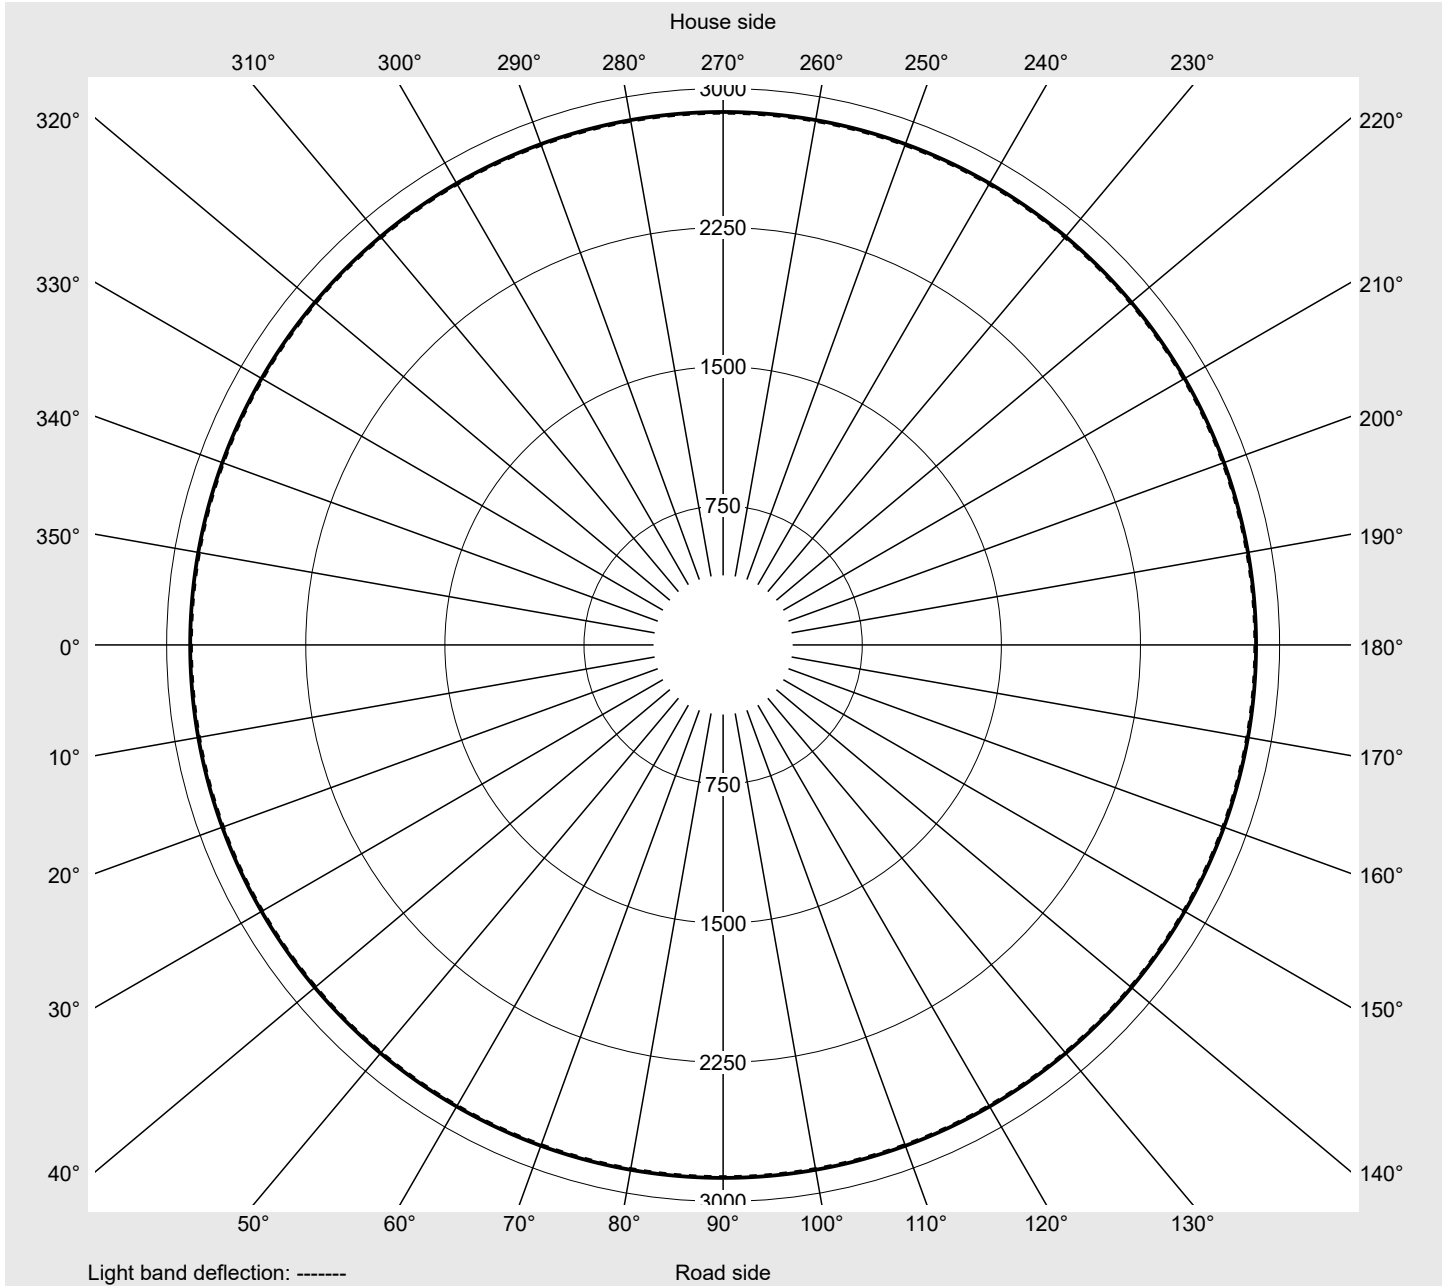

## Photometric test report

<b>Family</b> Floodlight FL21 mini	<b>Order number: 5XA7772C5B1A</b> <b>EAN: 4058352655672</b>	<b>LP number</b> 59238_65
---------------------------------------	--	------------------------------

**sITeco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight FL21 mini	<b>Order number: 5XA7772C5B1A</b> <b>EAN: 4058352655672</b>	<b>LP number</b> 59238_65
---------------------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	11510	87.2	92.1	89.6
95	241	252	10921	81.9	86.5	84.2
90	229	250	10377	77.1	81.4	79.2
85	216	248	9788	72.0	76.0	74.0
80	203	246	9199	67.1	70.8	68.9
75	190	243	8610	62.3	65.7	64.0
70	178	241	8066	57.9	61.1	59.5
65	165	238	7477	53.2	56.2	54.7
60	152	235	6888	48.6	51.4	50.0
55	140	232	6344	44.5	46.9	45.7
50	127	229	5755	40.1	42.2	41.2
45	114	225	5166	35.9	37.7	36.8
40	102	221	4622	31.9	33.6	32.8
35	89	216	4033	27.8	29.3	28.6
30	76	210	3444	23.8	25.0	24.4
25	63	203	2855	20.0	21.0	20.5
20	51	195	2311	16.5	17.3	16.9
16	40	186	1813	13.3	13.9	13.6