
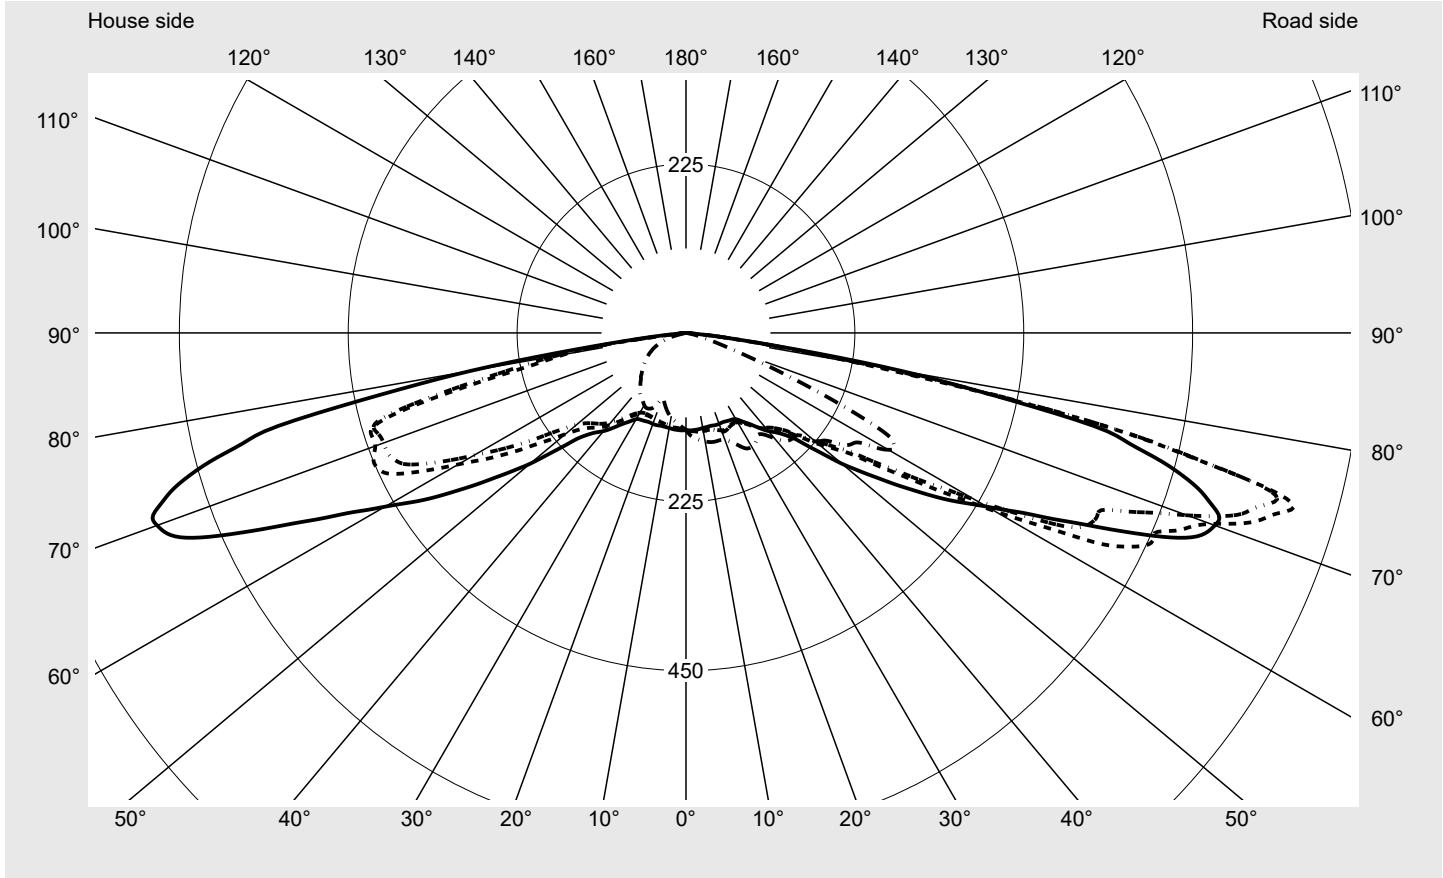


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 5680 lm Power consumption = 37.1 W Luminous efficacy = 153.1 lm/W	serial documentation 18.07.2022



Luminous intensity in cd/klm C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 842 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	827.2
Imax 80°	295.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
------------------------------------------	----------------------------------------------------------------	-------------------------------

Envelope curve in cd/klm **KMK 74°** **KMK 73°** **KMK 72°** **KMK 71°** **siteco**

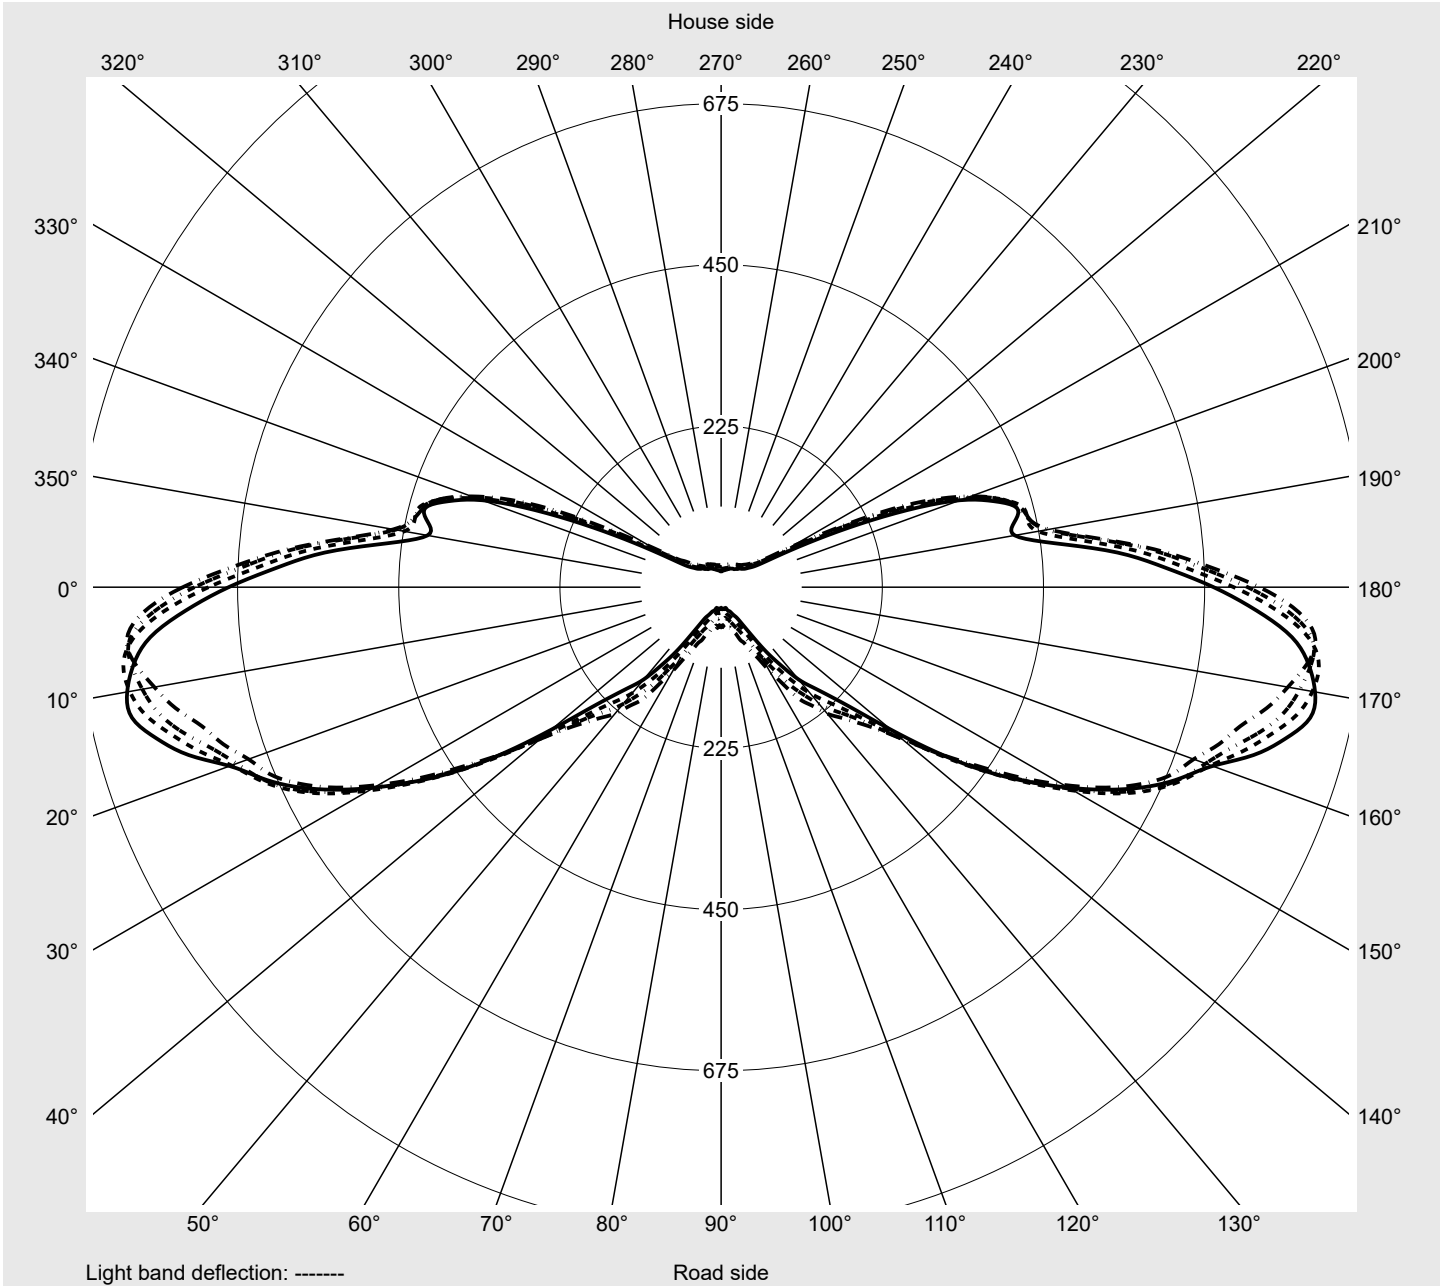

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	130.0	130.1	130.3	130.6	130.7	130.9	131.0	130.9	131.2	131.5	131.5	131.5	132.1	132.1	132.4
5,0°	129.8	130.2	130.2	130.3	130.9	131.5	131.5	132.7	132.7	132.3	133.9	133.9	133.9	133.9	133.9
7,5°	129.5	129.7	130.7	130.9	131.7	132.7	133.3	133.3	133.7	134.3	134.5	134.7	135.0	135.7	136.1
10,0°	128.7	129.4	130.3	131.2	131.8	132.9	133.5	133.4	134.1	134.5	135.0	135.6	135.9	136.5	137.0
12,5°	128.3	129.3	130.4	131.1	131.8	132.7	133.2	134.1	134.3	135.2	136.1	137.1	137.8	138.3	138.8
15,0°	128.1	129.8	131.2	131.9	132.4	133.5	133.6	134.9	135.7	137.1	138.3	139.0	139.8	140.4	141.4
17,5°	128.9	130.6	131.8	133.0	134.2	135.3	136.5	137.9	139.2	140.4	141.6	142.9	143.8	144.6	145.3
20,0°	129.0	131.1	133.1	134.7	136.9	138.3	140.4	142.3	143.6	144.7	145.7	146.7	147.5	148.3	149.5
22,5°	128.7	131.0	133.3	135.2	136.9	138.7	140.4	142.6	144.5	146.0	147.6	149.4	150.9	151.8	152.9
25,0°	129.5	131.5	133.4	134.4	135.5	136.8	137.9	139.1	141.8	144.2	146.7	149.1	151.4	154.4	156.5
27,5°	130.5	131.6	132.2	133.1	134.0	135.3	136.5	138.4	139.6	142.3	143.9	146.5	149.4	152.2	155.3
30,0°	132.7	133.8	134.2	135.4	136.5	136.4	137.5	138.9	139.5	141.3	142.6	144.2	145.6	148.3	152.2
32,5°	139.9	140.6	141.8	141.7	142.3	142.3	143.1	143.2	143.3	143.7	144.3	144.6	145.6	147.1	149.6
35,0°	148.3	149.2	149.7	150.8	151.6	150.5	149.9	150.7	150.4	149.4	148.7	147.3	146.8	147.3	149.2
37,5°	159.3	159.5	159.2	159.1	159.8	159.1	158.7	157.5	156.7	156.1	154.6	152.1	150.4	149.6	150.3
40,0°	170.7	169.7	168.2	167.0	166.3	166.1	164.9	163.2	161.8	160.8	159.4	157.5	155.7	153.6	151.4
42,5°	180.4	178.2	176.3	175.2	174.5	173.0	171.5	169.7	168.1	166.8	165.3	163.3	160.7	157.4	154.6
45,0°	195.4	192.7	189.9	187.8	186.5	185.0	182.8	181.1	178.8	176.6	173.8	169.4	164.9	161.5	157.9
46,0°	204.7	201.7	198.4	195.6	193.6	191.9	189.0	185.3	182.7	181.6	178.3	173.1	168.0	164.1	160.1
47,0°	219.1	215.1	210.6	206.8	203.4	200.3	197.7	194.3	190.5	187.5	183.4	177.4	171.8	167.6	163.2
48,0°	234.4	230.0	224.1	218.4	213.3	209.0	205.0	201.2	197.3	193.9	189.1	182.7	176.9	171.9	167.3
49,0°	252.0	247.1	240.5	232.8	226.0	219.8	214.6	210.1	205.5	201.0	195.7	189.1	182.6	177.0	171.9
50,0°	271.2	264.6	255.6	247.1	238.2	230.4	225.0	220.1	214.4	209.3	203.8	197.4	189.9	183.4	177.7
51,0°	287.4	280.4	270.8	259.5	248.1	239.5	233.6	228.7	222.9	218.5	213.2	206.8	198.2	191.4	186.0
52,0°	304.5	297.1	286.3	273.6	260.8	250.5	243.4	238.2	233.8	229.2	223.6	217.4	209.0	201.2	194.9
53,0°	322.3	314.6	303.6	289.0	273.2	262.0	255.3	249.7	245.0	241.4	235.7	229.6	222.1	214.4	206.3
54,0°	342.2	335.0	324.1	309.5	293.1	277.6	267.5	261.7	259.3	254.8	249.3	243.3	235.8	228.6	220.1
55,0°	361.7	356.4	346.0	333.0	318.1	302.6	289.6	281.4	276.4	271.0	265.2	258.5	250.4	243.4	235.7
56,0°	382.5	379.8	370.6	357.3	342.9	328.9	314.5	302.8	296.4	289.5	282.4	275.5	267.1	259.6	252.5
57,0°	403.7	407.8	402.4	392.4	374.9	358.8	341.0	329.3	318.1	309.3	300.0	292.1	283.2	275.7	267.0
58,0°	423.5	433.3	435.7	429.9	414.5	395.0	373.7	354.8	341.7	330.8	319.4	310.1	299.6	290.0	279.1
59,0°	442.1	458.9	465.8	463.5	452.4	431.7	404.3	382.4	366.8	352.5	338.5	326.1	312.5	300.3	288.5
60,0°	463.0	490.9	504.4	507.6	495.8	474.9	446.0	419.5	393.9	374.5	355.5	337.7	320.7	307.7	296.3
61,0°	486.8	523.8	544.1	550.3	537.9	517.7	486.6	453.7	419.9	393.1	368.4	346.4	327.0	313.1	304.0
62,0°	511.8	557.2	585.4	594.8	585.8	564.0	529.0	487.6	440.2	404.5	374.4	350.2	330.9	319.6	313.7
63,0°	544.5	595.1	624.1	641.8	640.8	617.8	568.0	510.4	453.0	410.8	378.0	355.4	339.2	331.7	326.8
64,0°	577.3	628.9	664.7	682.7	679.6	649.5	588.8	519.2	459.0	416.7	385.9	368.8	357.9	354.0	348.8
65,0°	616.2	672.3	706.3	726.2	715.2	671.5	596.9	519.9	464.8	429.9	405.1	393.4	383.3	378.5	366.7
66,0°	656.9	717.8	753.3	761.9	740.6	680.6	599.8	526.4	481.3	456.0	435.9	426.7	414.0	403.3	384.1
67,0°	696.5	765.3	796.9	790.2	747.7	680.0	603.4	543.4	510.0	491.9	476.9	467.3	447.0	426.5	400.2
68,0°	726.8	796.6	823.4	802.1	760.5	703.3	635.5	585.5	553.5	541.2	527.7	511.3	480.9	451.4	414.7
69,0°	742.6	807.9	826.0	806.4	771.3	720.6	668.9	639.2	610.6	599.9	580.0	553.5	514.6	471.5	422.7
70,0°	749.8	808.5	827.2	810.6	776.0	744.0	710.5	696.5	664.9	649.0	621.1	584.0	536.6	484.6	426.9
71,0°	751.5	807.4	832.7	824.7	803.3	780.0	750.1	728.7	702.0	681.9	649.2	605.7	551.9	494.1	433.6
72,0°	735.1	793.2	828.5	830.5	820.5	805.5	779.4	746.5	719.8	696.3	664.7	619.2	562.9	502.4	441.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	132.3	132.2	132.2	132.3	132.6	132.7	133.2	133.0	133.0	132.8	133.3	133.1	133.7	133.7	133.7
5,0°	134.2	134.6	135.0	134.6	135.2	135.3	135.7	136.2	136.3	136.8	137.3	137.4	137.8	138.2	138.8
7,5°	136.4	136.5	136.8	137.0	137.5	137.7	138.4	138.4	138.7	139.1	139.8	140.6	141.3	141.4	142.0
10,0°	137.6	137.7	138.4	138.8	139.3	140.0	139.9	141.0	141.0	140.9	142.3	142.9	144.0	144.6	144.9
12,5°	139.1	139.7	140.6	140.9	141.8	141.8	142.8	143.2	144.0	144.6	145.4	146.0	146.5	147.2	147.8
15,0°	141.7	142.7	143.5	144.3	144.5	145.1	145.7	146.4	146.5	146.8	148.2	148.2	149.0	149.0	149.0
17,5°	146.1	146.6	147.2	147.7	148.1	148.6	148.5	148.9	149.5	150.1	150.8	150.7	150.7	151.1	151.3
20,0°	150.4	151.0	152.0	152.3	152.2	152.0	152.7	152.7	152.7	153.1	153.8	153.7	154.3	154.4	154.4
22,5°	154.1	155.3	155.7	156.2	156.2	156.7	156.6	156.5	156.8	157.0	157.6	158.1	158.2	158.3	157.9
25,0°	158.4	159.8	160.4	160.8	160.8	161.8	161.1	161.5	162.8	163.5	164.6	165.9	165.4	165.3	165.2
27,5°	159.5	163.1	166.1	167.3	168.0	169.5	170.4	171.8	173.6	174.8	175.7	176.0	175.2	174.3	173.7
30,0°	157.8	163.8	170.1	175.4	179.1	181.2	182.8	183.3	184.4	186.1	186.5	185.3	182.1	179.7	179.5
32,5°	153.9	160.6	170.5	179.7	187.5	190.4	189.8	189.2	189.4	190.3	188.6	183.3	178.1	175.1	174.2
35,0°	153.4	159.2	166.6	176.2	185.1	190.5	189.9	186.6	184.1	183.4	181.2	176.9	173.5	170.8	169.7
37,5°	152.5	156.6	160.8	166.3	174.1	178.7	179.7	178.1	177.7	179.6	179.4	176.0	173.8	173.6	173.7
40,0°	150.7	152.6	156.2	158.0	160.9	166.4	172.0	175.8	178.3	180.1	181.2	182.6	185.0	186.8	187.8
42,5°	152.1	151.1	151.9	153.3	155.1	161.2	170.5	179.1	186.4	191.2	196.2	200.4	204.9	207.1	208.8
45,0°	154.4	152.4	151.4	152.2	154.4	161.2	173.9	187.8	197.9	206.4	214.4	219.2	220.4	221.0	220.6
46,0°	156.8	154.2	152.3	152.0	154.4	162.3	176.9	191.9	203.0	212.3	219.3	223.7	225.6	226.0	224.2
47,0°	159.3	155.9	153.5	152.9	155.4	163.2	179.7	196.9	208.7	216.6	223.5	227.8	229.7	229.5	227.0
48,0°	162.9	158.3	154.9	154.4	156.9	164.8	182.8	202.5	214.9	223.0	227.9	230.8	232.1	232.7	229.7
49,0°	167.0	161.6	157.6	156.5	158.6	167.3	186.6	205.1	218.0	227.9	233.7	235.2	235.5	232.7	227.4
50,0°	172.4	166.7	162.1	159.8	162.8	172.1	192.5	210.8	222.3	232.5	240.2	238.7	237.0	231.9	231.0
51,0°	179.5	173.2	168.4	165.8	167.9	178.2	199.4	217.3	228.7	242.7	247.0	242.8	240.7	239.5	240.4
52,0°	188.3	181.1	176.5	174.3	175.4	185.6	206.8	225.7	234.5	250.3	256.2	250.7	251.3	251.7	252.5
53,0°	199.1	192.5	187.3	184.8	187.3	197.4	216.4	234.3	243.1	255.2	262.6	261.0	261.3	261.6	259.5
54,0°	211.4	204.1	198.1	194.7	197.2	207.8	225.6	243.6	252.2	263.2	267.6	265.3	265.7	263.2	265.7
55,0°	225.6	216.7	210.3	205.8	207.3	217.9	235.7	253.0	260.3	267.9	267.4	266.0	264.8	268.9	272.9
56,0°	242.9	231.7	222.7	215.8	216.2	226.9	245.2	260.0	265.8	271.7	267.4	266.6	272.6	279.8	285.0
57,0°	256.6	242.7	230.7	222.5	224.4	237.4	256.6	270.0	275.0	276.9	273.4	278.4	287.1	293.0	294.1
58,0°	267.0	252.5	239.5	231.6	236.3	249.1	269.9	282.1	286.2	286.1	284.8	290.5	296.1	296.1	292.3
59,0°	275.1	261.5	251.5	246.7	251.1	265.1	284.7	293.7	293.8	291.6	290.8	291.7	291.7	287.0	280.5
60,0°	284.0	273.4	267.4	262.1	264.9	275.2	289.6	297.1	293.2	288.3	287.8	283.3	276.8	271.4	267.0
61,0°	295.2	288.3	282.9	276.8	275.2	283.2	292.3	296.7	291.1	284.7	275.8	264.0	256.0	253.0	248.6
62,0°	307.9	303.5	296.1	285.9	281.2	285.6	290.8	294.6	287.8	273.9	253.1	243.4	235.4	229.8	229.9
63,0°	325.0	318.0	303.9	290.6	283.2	285.9	289.3	289.9	273.7	253.6	233.3	221.8	211.9	211.9	209.1
64,0°	341.2	326.9	309.7	293.8	283.9	282.3	281.1	274.7	256.7	235.3	211.7	199.1	193.4	193.6	191.7
65,0°	352.8	333.3	312.2	294.7	281.7	276.4	271.5	261.8	241.0	218.1	194.4	183.9	179.8	185.1	187.2
66,0°	364.1	339.0	312.0	291.3	277.3	269.7	260.5	247.6	227.0	205.5	183.8	172.3	175.8	179.9	177.1
67,0°	372.5	340.2	309.8	288.3	273.9	261.1	249.4	234.9	216.6	195.2	174.3	169.9	169.0	168.7	160.7
68,0°	376.6	339.3	307.3	284.1	267.4	254.8	240.2	224.7	206.7	187.2	169.8	160.5	156.2	150.6	140.6
69,0°	378.0	337.0	303.1	279.7	261.4	248.2	230.0	216.2	197.6	177.5	156.8	143.5	133.4	125.9	112.3
70,0°	379.0	333.2	296.9	274.0	256.2	241.0	221.8	206.9	185.4	161.6	136.5	122.6	110.2	100.6	89.2
71,0°	380.2	329.5	291.8	266.6	246.9	230.4	208.3	190.5	159.5	134.8	111.8	98.3	84.6	78.5	68.0
72,0°	380.9	328.8	285.3	254.5	233.9	212.8	189.2	165.6	135.3	111.5	87.8	75.3	65.1	59.8	54.3

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	134.2	134.8	135.3	136.1	136.5	137.3	136.6	129.9	129.8	129.6	129.0	128.7	128.7	128.7	128.4
5,0°	139.4	140.0	140.1	140.7	141.4	140.9	140.7	129.5	129.1	128.7	128.3	127.4	127.4	126.6	126.8
7,5°	142.7	143.2	143.2	143.9	143.7	143.7	144.0	129.0	128.6	128.0	127.5	127.0	126.6	125.7	125.6
10,0°	146.5	146.2	146.2	146.6	146.9	147.1	146.8	127.8	127.1	126.8	126.3	125.9	125.2	124.3	123.7
12,5°	148.2	148.4	148.7	148.9	148.9	148.9	149.0	127.2	126.3	125.7	125.1	124.8	124.1	123.1	122.4
15,0°	149.6	149.6	149.8	149.9	149.2	150.1	149.9	126.9	125.7	124.8	124.4	123.7	122.8	121.6	121.8
17,5°	151.3	150.9	150.9	150.4	149.9	149.7	149.9	127.6	126.1	124.9	124.4	123.3	122.3	121.4	121.0
20,0°	153.6	152.6	151.9	151.5	151.4	151.1	151.7	127.5	125.9	124.5	123.3	122.4	121.4	120.7	119.9
22,5°	157.5	157.1	156.5	157.0	156.5	156.9	157.3	126.8	125.2	123.7	122.4	121.5	120.5	119.7	118.7
25,0°	165.1	164.2	164.7	165.5	165.0	165.5	165.2	127.3	125.4	123.8	122.5	121.3	120.1	118.6	117.2
27,5°	173.5	173.9	173.5	173.8	173.0	173.2	173.5	128.5	126.7	124.9	123.5	122.2	120.4	118.8	116.5
30,0°	178.9	177.7	177.0	176.3	176.8	176.0	175.1	131.7	130.5	128.3	126.4	125.1	122.8	120.4	118.1
32,5°	173.5	173.0	173.0	172.8	172.9	173.2	172.6	138.3	137.1	134.9	133.2	130.6	128.0	125.0	122.1
35,0°	170.0	168.9	167.3	167.4	167.1	167.1	166.5	147.9	146.5	144.5	141.9	139.4	136.1	132.2	128.5
37,5°	173.7	173.6	173.2	172.2	171.0	170.3	170.8	158.6	157.7	155.9	153.3	149.6	145.3	140.1	134.5
40,0°	188.8	190.4	190.0	187.7	185.1	185.5	183.1	170.8	170.5	168.8	165.4	160.8	155.4	148.2	140.3
42,5°	208.1	208.2	205.7	202.0	198.6	196.9	195.3	181.9	182.1	180.4	176.3	170.9	164.1	156.0	146.3
45,0°	219.8	219.1	211.9	206.8	202.3	200.3	199.6	196.8	195.8	192.1	185.9	178.7	170.7	161.6	149.9
46,0°	221.6	220.1	215.8	208.2	203.8	199.4	200.2	206.7	205.1	199.7	191.3	182.5	173.3	163.8	151.7
47,0°	225.1	220.0	216.5	208.6	202.4	199.4	200.9	220.4	217.5	209.6	198.4	187.1	176.4	166.0	153.5
48,0°	223.8	218.1	213.4	208.7	205.1	202.2	203.9	234.7	230.7	220.8	207.0	193.0	179.9	168.1	155.3
49,0°	225.4	221.9	218.0	215.3	213.6	213.8	211.3	252.4	247.3	235.2	218.0	200.6	184.6	170.9	156.9
50,0°	232.0	238.3	229.2	229.7	226.0	226.3	221.1	271.6	265.3	251.0	230.9	209.9	190.4	174.0	158.7
51,0°	245.9	254.8	243.7	239.2	234.6	232.2	229.1	288.6	281.5	265.8	244.0	220.5	197.9	178.4	160.7
52,0°	254.1	264.9	251.3	239.5	233.7	227.4	232.8	305.6	297.9	280.8	257.0	232.1	207.7	185.3	163.7
53,0°	260.6	268.5	258.6	250.6	245.3	241.8	240.2	323.0	314.0	295.0	269.5	243.8	218.8	194.4	170.5
54,0°	266.7	278.9	272.6	264.4	256.2	255.8	251.2	341.5	330.2	309.8	283.5	257.6	232.3	206.3	180.8
55,0°	279.0	284.8	282.6	277.9	267.3	266.0	260.4	358.0	344.1	323.7	298.3	273.1	248.0	220.9	192.8
56,0°	285.5	286.4	287.4	277.1	267.9	263.3	265.4	375.9	358.3	336.6	311.7	287.8	263.3	236.6	208.1
57,0°	292.4	287.8	284.1	272.9	266.3	263.3	268.4	393.0	371.9	349.2	325.6	303.1	278.7	252.5	226.6
58,0°	290.7	286.3	291.3	294.4	283.6	280.5	277.6	407.6	384.4	360.6	339.4	318.3	294.1	267.9	240.5
59,0°	278.7	278.8	289.0	302.1	302.5	298.0	297.9	419.7	394.1	371.3	352.6	333.1	309.5	284.0	258.1
60,0°	267.7	269.5	280.0	297.0	305.9	315.0	311.4	434.3	407.6	387.1	369.0	350.3	326.4	301.1	274.3
61,0°	249.9	252.8	265.4	286.0	308.3	317.7	317.6	450.6	421.7	403.7	387.6	370.0	345.0	318.0	288.7
62,0°	232.5	233.4	247.8	271.2	300.1	311.6	313.3	469.5	435.9	420.6	407.3	389.8	363.8	334.8	303.1
63,0°	210.5	214.1	229.5	256.6	289.2	307.1	304.1	497.2	456.6	439.8	427.7	409.9	382.2	351.1	315.1
64,0°	195.8	207.8	221.2	242.0	263.9	272.6	274.0	528.6	481.2	461.4	447.0	428.4	399.5	366.6	330.4
65,0°	193.0	195.0	200.9	209.0	222.4	228.7	232.2	566.7	509.6	482.8	462.0	441.7	413.6	380.6	343.9
66,0°	177.8	172.4	177.5	174.8	187.2	183.4	191.0	603.0	538.5	500.4	472.0	447.3	421.0	391.8	356.2
67,0°	155.5	148.8	147.2	145.6	152.3	149.9	152.3	631.8	566.0	518.3	478.9	450.1	425.8	400.5	365.3
68,0°	134.7	124.7	122.6	119.0	124.7	116.2	119.8	650.9	578.9	525.3	480.4	449.2	428.4	406.4	370.4
69,0°	104.5	96.5	91.9	88.9	92.3	87.9	93.4	662.8	586.6	524.4	475.2	444.8	428.8	409.6	374.1
70,0°	83.3	75.7	73.2	70.2	72.7	68.8	71.9	672.8	595.5	524.6	468.0	440.6	428.8	410.5	374.4
71,0°	64.9	58.0	57.5	54.0	57.0	53.2	55.9	678.9	607.0	526.4	464.7	439.8	429.5	409.7	370.6
72,0°	50.2	46.0	45.0	43.0	44.2	42.7	44.2	666.3	601.5	522.2	461.6	440.6	432.1	409.2	367.4

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	128.2	128.1	127.8	127.7	127.7	127.5	127.1	126.8	126.6	126.3	126.2	126.1	126.1	126.0	125.9
5,0°	126.9	126.5	125.9	125.4	125.4	125.3	124.9	124.4	123.9	123.9	123.5	123.2	122.8	122.5	122.5
7,5°	125.3	125.1	124.3	124.0	123.3	122.7	122.2	122.1	121.8	121.1	120.9	120.8	120.4	119.9	119.8
10,0°	123.9	122.6	121.8	121.7	121.7	121.0	120.4	120.1	119.7	119.7	119.6	119.1	118.5	118.3	117.8
12,5°	121.9	121.3	121.1	120.8	120.4	119.8	119.5	118.9	118.6	118.2	117.5	117.1	116.4	115.5	114.8
15,0°	120.4	120.6	119.3	119.3	118.7	118.6	118.2	117.2	116.3	115.7	115.0	114.2	113.2	112.3	111.2
17,5°	120.0	119.1	118.6	118.0	117.4	116.7	116.0	115.2	113.8	112.7	111.6	110.4	109.5	108.1	106.6
20,0°	118.6	118.1	117.7	116.7	115.9	114.6	113.4	112.2	110.8	109.1	107.7	105.8	104.0	102.0	100.2
22,5°	117.5	116.5	115.7	114.4	113.0	111.8	110.5	108.6	106.5	104.3	101.8	99.6	97.4	95.1	93.6
25,0°	116.1	114.9	113.7	112.6	111.4	108.9	106.4	104.0	100.4	97.8	94.9	92.8	91.3	89.7	88.7
27,5°	115.2	113.4	112.3	109.9	107.3	104.3	101.2	97.9	94.8	92.2	90.0	88.4	88.1	90.2	93.8
30,0°	115.2	113.9	110.3	107.0	103.4	99.8	95.6	92.7	89.8	88.1	87.1	89.4	93.5	98.4	103.7
32,5°	118.0	114.2	110.0	104.6	99.4	94.9	91.6	88.5	86.5	86.6	90.0	95.5	101.2	107.9	114.2
35,0°	123.1	117.2	109.8	102.4	96.5	91.5	87.3	85.2	85.9	89.2	94.5	101.0	107.7	114.2	119.5
37,5°	127.1	117.8	108.4	99.9	92.7	87.3	84.5	85.1	87.9	92.2	97.5	103.5	109.5	114.9	118.3
40,0°	130.1	117.6	106.1	95.9	88.2	84.0	84.2	87.3	91.0	94.3	98.5	103.2	107.5	110.8	111.7
42,5°	132.3	116.1	101.5	90.8	84.7	83.6	86.1	89.5	92.7	95.8	98.8	101.4	103.7	105.2	104.8
45,0°	132.9	113.6	97.6	87.9	84.7	86.1	88.9	91.1	93.2	95.3	97.0	98.4	99.1	98.8	97.5
46,0°	134.1	113.8	96.8	87.3	84.8	86.9	89.6	91.1	92.6	94.0	95.2	95.9	96.8	96.5	94.4
47,0°	135.5	114.2	96.4	87.2	86.1	88.2	89.9	91.1	92.1	92.5	93.4	93.9	94.3	93.7	91.4
48,0°	137.4	115.7	97.1	87.7	86.9	89.1	90.5	90.9	91.1	91.4	91.5	91.8	91.6	90.7	88.6
49,0°	139.2	117.5	98.4	88.8	88.0	90.1	90.7	90.3	90.0	89.5	89.6	89.7	89.0	87.9	85.9
50,0°	141.5	119.5	100.2	90.7	89.5	90.7	90.4	89.7	89.0	87.5	87.1	87.1	86.3	85.0	83.0
51,0°	142.6	122.1	103.3	92.8	91.3	92.2	91.0	89.6	87.8	85.9	84.5	84.0	82.7	81.4	80.3
52,0°	145.6	124.9	106.1	95.7	92.9	92.7	91.4	89.7	87.2	83.9	82.1	81.6	80.3	79.0	77.8
53,0°	149.7	128.4	109.4	98.4	95.5	94.1	91.8	89.3	86.0	82.5	80.1	79.3	78.2	76.7	75.5
54,0°	157.7	133.1	112.5	101.5	98.4	95.7	92.5	89.5	85.0	80.6	78.2	77.1	75.5	74.6	73.3
55,0°	166.4	140.2	117.6	104.4	99.6	96.3	92.6	88.2	83.2	78.6	75.7	74.3	73.2	72.3	70.9
56,0°	180.6	149.8	123.8	108.2	102.4	97.5	92.1	87.3	81.3	76.6	74.2	72.5	71.4	70.5	69.1
57,0°	197.8	164.1	133.4	112.4	104.1	97.9	91.6	85.5	79.5	74.6	72.0	70.6	69.4	68.6	66.8
58,0°	211.8	176.2	141.8	118.6	107.4	99.2	90.7	83.5	77.3	72.8	70.1	68.7	67.2	66.6	65.0
59,0°	228.1	190.9	153.0	125.5	110.3	99.6	90.0	82.2	75.5	71.0	68.4	66.8	65.1	64.4	63.2
60,0°	241.7	202.9	163.5	131.9	112.8	99.5	89.2	80.6	74.1	69.3	66.9	64.9	63.0	62.6	61.2
61,0°	255.1	213.4	172.0	139.1	117.1	100.1	87.3	78.2	72.0	68.0	65.1	63.1	61.4	60.5	59.0
62,0°	265.6	221.5	179.9	146.1	120.7	100.3	85.7	77.0	70.2	66.2	63.2	60.8	59.1	58.2	57.3
63,0°	274.1	228.8	185.4	149.5	121.3	99.4	84.2	74.2	68.4	64.3	61.3	59.0	57.2	56.1	55.7
64,0°	285.8	234.4	188.6	149.9	121.0	98.2	81.5	72.4	66.6	62.5	59.5	57.1	55.3	54.1	53.3
65,0°	294.0	239.3	189.9	149.1	116.5	94.6	79.2	70.0	64.2	60.2	57.6	55.3	53.5	52.2	51.1
66,0°	301.8	245.3	191.8	146.3	112.3	90.2	75.9	67.7	61.9	58.3	55.4	53.4	51.6	50.4	49.2
67,0°	310.4	249.2	190.8	139.6	105.4	85.2	72.3	64.4	60.1	56.4	53.4	51.0	49.3	48.6	47.5
68,0°	314.4	251.7	188.5	134.1	99.3	80.0	69.0	61.9	57.0	53.5	51.0	49.1	47.3	46.8	45.9
69,0°	318.7	252.9	183.3	127.5	92.5	76.0	64.9	58.2	53.6	50.9	48.0	46.5	44.4	44.6	43.3
70,0°	319.5	253.1	176.2	117.9	84.0	70.4	60.8	54.6	49.9	47.3	44.9	43.5	41.9	41.5	40.3
71,0°	318.7	249.1	168.2	110.7	75.1	64.1	56.1	50.5	46.9	44.4	42.0	40.6	39.3	38.6	37.4
72,0°	310.0	234.4	154.0	98.2	68.0	57.4	50.8	47.1	44.6	42.6	40.2	38.1	36.5	36.2	35.1

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	0.2	0.2
2,5°	125.8	125.7	125.6	125.6	125.5	125.5	125.4	125.3	125.3	125.3	125.3	125.3	125.3	1.6	1.7
5,0°	122.3	122.2	122.0	121.7	121.5	121.4	121.4	121.3	121.1	121.0	121.0	121.0	121.0	3.1	4.8
7,5°	119.5	119.4	119.2	119.1	118.7	118.0	118.0	118.0	118.0	118.0	117.9	117.9	117.9	4.6	9.5
10,0°	117.2	116.8	116.5	116.1	115.6	115.3	114.8	114.8	114.6	114.3	114.3	114.3	114.3	6.2	15.7
12,5°	114.2	113.6	112.6	112.3	111.6	111.2	110.7	110.4	110.0	109.5	109.4	109.3	109.3	7.7	23.3
15,0°	110.2	109.4	108.5	107.6	106.7	105.9	105.3	104.8	104.3	103.8	103.5	103.2	103.2	9.1	32.4
17,5°	105.0	103.8	102.4	101.3	100.2	99.2	98.4	97.6	97.1	96.8	96.9	96.2	96.4	10.6	43.0
20,0°	98.5	97.2	95.7	94.6	93.8	93.3	93.1	93.2	93.4	93.8	94.3	94.6	93.4	12.0	55.0
22,5°	92.4	91.4	91.0	91.6	93.2	95.2	97.4	99.6	101.2	103.2	104.0	104.7	105.0	13.6	68.6
25,0°	89.4	92.0	95.3	98.4	101.6	104.5	106.4	108.0	109.2	110.0	110.6	110.9	111.2	15.2	83.8
27,5°	97.9	102.1	105.9	109.0	111.2	112.5	113.3	113.5	113.5	113.5	113.3	113.0	113.0	17.0	100.7
30,0°	108.8	113.0	116.2	118.3	118.8	118.2	117.2	115.8	114.3	112.9	111.7	111.2	111.2	18.8	119.5
32,5°	118.5	121.1	122.0	121.4	119.9	118.2	115.9	113.3	110.8	109.2	107.8	107.2	107.2	20.4	139.9
35,0°	122.3	122.7	121.1	118.6	115.7	112.5	109.5	107.0	105.3	104.4	103.8	103.8	103.8	21.9	161.7
37,5°	118.4	116.4	113.4	109.6	106.4	103.8	102.0	100.7	100.3	99.9	100.0	100.1	100.4	23.4	185.1
40,0°	110.4	107.1	103.5	100.0	98.4	96.7	95.8	95.3	95.2	94.7	95.2	94.6	94.6	25.1	210.2
42,5°	102.7	99.2	96.2	94.3	92.6	91.2	90.6	89.9	90.0	89.6	89.5	89.2	89.7	27.1	237.3
45,0°	95.4	92.8	90.7	88.7	87.4	86.1	85.7	85.4	84.8	84.8	84.5	84.5	84.8	20.3	257.5
46,0°	92.3	89.9	88.4	86.8	85.3	84.1	83.6	83.2	82.7	82.6	82.6	82.6	83.5	12.0	269.6
47,0°	89.6	87.7	86.2	84.5	83.2	82.3	81.4	81.2	81.1	80.8	81.1	81.1	81.1	12.4	282.0
48,0°	87.0	85.2	83.9	81.8	81.1	79.9	79.3	79.0	79.2	78.7	79.3	79.2	79.2	12.8	294.8
49,0°	84.3	82.9	81.6	79.7	79.1	77.7	77.2	77.2	77.1	76.8	77.1	77.4	77.4	13.4	308.2
50,0°	81.8	80.2	79.0	77.7	77.4	75.9	75.3	75.1	75.3	75.0	75.3	75.9	75.6	14.0	322.2
51,0°	79.4	78.1	76.5	75.6	75.0	74.1	73.5	73.2	73.4	73.2	73.7	73.7	73.7	14.6	336.8
52,0°	77.0	76.0	74.9	73.8	72.9	72.2	71.6	71.4	71.6	71.6	71.9	71.9	71.9	15.3	352.1
53,0°	74.6	73.9	73.3	71.7	71.0	70.3	69.5	69.5	69.8	69.8	70.0	70.3	70.0	16.1	368.2
54,0°	72.3	71.3	71.3	69.8	69.2	68.5	67.6	67.7	67.9	67.9	68.2	68.2	68.2	17.0	385.2
55,0°	70.3	69.4	69.0	68.0	67.6	66.7	65.8	65.3	65.8	66.1	66.3	66.0	66.3	17.9	403.1
56,0°	68.0	67.5	66.8	66.0	65.8	64.6	63.9	63.3	63.6	63.9	64.5	64.2	64.5	18.8	422.0
57,0°	65.7	65.5	64.9	63.7	63.4	62.5	62.4	61.5	61.8	61.8	62.4	62.7	62.7	19.9	441.8
58,0°	63.8	63.3	63.0	61.9	61.2	60.3	60.0	59.4	59.7	59.9	60.2	60.8	60.8	21.0	462.8
59,0°	62.0	61.4	61.0	59.8	59.1	58.1	57.5	57.2	57.5	57.8	58.4	58.7	59.0	22.0	484.8
60,0°	60.1	59.3	58.7	57.6	56.9	56.0	55.6	55.1	55.4	55.9	56.5	56.8	57.1	23.0	507.8
61,0°	58.2	57.3	56.7	55.5	54.8	53.8	53.5	52.9	53.2	54.1	54.4	54.7	55.3	23.8	531.6
62,0°	56.4	55.5	54.3	53.3	52.6	51.7	51.3	50.8	51.3	51.7	52.2	52.8	52.8	24.5	556.1
63,0°	54.5	53.3	52.1	51.2	50.5	49.3	49.2	48.9	49.2	49.5	50.1	51.0	51.0	25.2	581.3
64,0°	52.7	51.2	50.0	48.8	48.3	47.1	47.1	46.8	47.0	47.4	48.2	48.8	49.1	25.7	607.0
65,0°	50.6	49.0	47.9	46.8	46.5	45.5	45.2	44.6	45.2	45.2	46.1	46.7	46.7	26.2	633.2
66,0°	48.4	47.0	46.5	45.1	44.6	43.8	43.3	42.5	43.1	43.1	43.6	44.2	44.2	26.7	659.9
67,0°	46.5	44.8	44.4	43.1	42.5	41.3	41.2	40.3	40.9	40.9	41.5	41.8	41.8	27.1	687.0
68,0°	44.5	42.9	42.3	41.3	40.3	39.1	38.8	38.5	38.7	38.5	39.3	39.3	39.3	27.6	714.6
69,0°	42.1	40.9	40.2	38.9	38.5	37.2	36.6	36.3	36.3	35.7	36.6	36.6	36.9	27.8	742.4
70,0°	39.7	38.4	37.7	36.7	36.4	35.4	34.8	33.9	33.8	33.5	33.5	33.5	33.8	27.9	770.3
71,0°	37.2	36.0	35.5	34.6	34.0	33.3	32.6	31.4	31.4	31.1	31.0	30.7	30.7	27.9	798.2
72,0°	34.8	33.6	33.4	32.2	31.5	30.8	30.2	29.5	29.2	28.6	28.9	28.3	28.3	27.6	825.8

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
------------------------------------------	----------------------------------------------------------------	-------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	715.6	779.1	824.2	841.6	838.1	823.1	794.4	762.7	727.5	700.2	667.8	623.7	567.8	507.8	446.5
74,0°	687.5	748.2	799.8	827.2	841.9	842.3	815.9	779.3	729.9	695.6	658.4	612.1	559.6	504.0	445.5
75,0°	651.6	701.3	748.4	774.9	800.0	804.8	799.9	771.0	717.3	674.7	631.6	580.3	534.9	485.6	426.3
76,0°	608.7	647.3	679.5	689.6	708.1	710.0	713.1	701.6	672.4	629.9	588.3	540.1	499.8	449.7	386.9
77,0°	567.9	591.4	613.0	614.5	622.5	621.0	626.0	616.5	596.1	565.6	533.9	486.1	445.6	392.9	336.5
78,0°	472.5	473.8	514.2	501.0	521.9	500.7	505.7	481.3	496.3	476.3	460.8	415.0	376.1	322.9	275.3
79,0°	375.2	360.7	361.2	350.5	357.1	355.1	374.0	364.8	383.9	370.5	367.3	329.3	301.1	249.1	210.3
80,0°	291.2	271.4	261.7	247.3	245.4	241.5	257.1	260.5	281.8	280.8	280.5	257.5	229.9	186.1	151.1
81,0°	190.7	180.2	174.1	167.4	165.9	162.1	162.3	163.6	192.2	200.0	206.8	198.4	180.8	146.2	112.5
82,0°	109.0	99.4	97.8	94.4	98.6	98.3	104.2	106.1	120.4	128.1	136.3	137.1	133.0	115.5	88.6
83,0°	60.8	57.5	59.6	58.3	60.8	58.8	59.1	55.9	72.0	76.5	84.2	85.7	83.9	74.8	66.2
84,0°	29.7	27.9	29.7	29.7	32.8	34.2	37.6	37.0	41.7	44.4	52.4	56.6	55.7	43.5	34.9
85,0°	6.7	6.3	6.4	6.5	8.1	8.4	12.6	14.0	24.2	25.5	28.4	28.0	22.6	11.1	7.3
86,0°	4.9	4.4	4.4	4.4	4.5	4.7	4.8	5.1	10.2	10.5	12.0	11.2	10.9	7.1	5.2
87,0°	3.7	3.8	3.8	3.9	4.0	3.3	3.3	2.5	3.4	2.8	2.8	2.9	2.8	2.4	2.4
88,0°	3.1	2.5	2.5	2.5	2.5	2.5	2.5	2.7	2.5	2.5	2.5	2.1	1.7	1.7	1.8
89,0°	2.5	2.5	2.5	2.6	2.5	2.9	2.9	2.1	2.2	1.9	2.0	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
-------------------------------------------------	----------------------------------------------------------------	--------------------------------------

siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	384.7	323.9	274.7	239.4	215.1	193.2	167.1	139.2	111.1	87.1	67.0	58.7	51.8	47.1	43.6
74,0°	377.9	309.4	252.7	215.3	189.7	168.1	138.2	110.5	80.9	60.9	49.0	44.0	40.0	36.3	34.7
75,0°	351.5	282.7	226.5	192.0	166.5	141.4	111.3	81.5	57.4	46.0	37.9	34.6	32.5	31.3	29.1
76,0°	312.4	248.2	198.9	167.2	141.0	114.1	81.3	57.8	41.7	35.9	31.2	27.8	24.7	23.2	20.7
77,0°	268.5	209.2	164.2	137.9	111.2	83.3	56.1	40.2	32.0	27.5	22.3	20.1	17.5	17.1	15.2
78,0°	216.5	171.6	134.8	112.8	83.6	60.3	40.6	30.0	24.3	20.2	17.4	16.0	14.0	12.4	11.2
79,0°	164.5	134.3	106.7	87.7	62.4	43.7	28.4	22.9	16.9	15.1	11.1	10.3	9.0	9.0	7.6
80,0°	121.9	102.2	85.4	65.8	38.8	26.7	20.0	14.8	12.3	9.7	7.5	6.8	6.0	6.0	5.2
81,0°	86.5	76.7	53.2	29.6	21.8	17.2	13.5	10.1	7.4	6.0	5.5	4.8	4.8	4.8	4.8
82,0°	50.7	38.4	30.2	14.8	10.4	10.4	7.9	6.6	5.3	4.7	3.1	3.1	3.5	3.6	3.6
83,0°	36.4	26.3	18.5	10.6	6.5	6.4	6.0	4.8	4.2	3.5	3.5	3.5	1.9	1.8	1.8
84,0°	26.3	9.4	6.3	5.7	4.6	4.6	3.2	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8
85,0°	5.9	4.3	3.1	2.5	2.5	2.5	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8	2.1
86,0°	3.0	2.5	2.5	2.5	1.9	1.9	2.0	1.8	2.0	1.8	2.0	2.1	2.1	2.1	1.2
87,0°	1.9	1.8	1.9	1.9	1.2	1.2	1.2	2.0	1.2	2.0	1.2	1.2	1.5	1.2	1.2
88,0°	1.8	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.2	0.6	1.5	1.2
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	0.4	1.4	0.6	0.6	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	40.9	38.8	35.9	34.7	36.5	35.6	35.6	646.5	582.2	504.2	449.0	438.0	435.0	407.6	362.2
74,0°	32.7	29.7	31.1	30.0	30.4	30.7	28.9	621.1	555.2	469.8	416.2	419.3	427.5	399.2	354.9
75,0°	27.7	24.2	22.7	20.9	20.3	19.7	22.1	592.8	525.7	424.7	366.4	376.8	394.9	376.0	331.4
76,0°	19.8	17.8	17.1	17.2	16.3	15.7	16.6	560.0	489.3	371.9	309.5	318.6	343.2	338.3	301.5
77,0°	15.2	13.8	12.9	13.5	13.2	12.9	12.9	519.9	438.9	306.8	253.0	262.1	291.9	295.5	267.3
78,0°	11.2	10.7	10.7	9.2	9.8	8.3	9.8	440.2	374.7	243.6	203.4	215.0	245.6	254.7	228.1
79,0°	7.9	7.0	7.0	6.1	7.0	6.1	7.4	371.6	318.4	205.4	175.1	187.0	210.9	219.8	201.7
80,0°	4.3	4.6	4.6	4.6	4.6	4.6	4.9	295.3	256.2	170.4	156.9	164.0	177.3	179.6	153.7
81,0°	4.9	4.0	4.0	4.3	4.3	4.3	3.7	196.2	181.0	135.4	134.7	137.2	138.3	133.0	114.9
82,0°	3.6	3.6	3.4	2.5	2.5	2.5	3.1	123.5	127.4	97.7	98.0	93.8	90.5	81.3	58.9
83,0°	1.8	1.8	2.7	2.8	2.8	2.5	2.5	67.1	71.7	45.5	36.9	29.9	35.8	35.3	34.5
84,0°	2.1	1.8	2.1	2.1	2.1	3.1	2.5	31.6	32.3	21.5	12.4	8.9	12.9	14.0	6.8
85,0°	1.0	2.1	1.2	1.2	1.2	1.2	1.8	6.1	7.0	6.4	6.3	5.8	6.0	5.6	5.5
86,0°	2.1	1.2	1.2	1.2	1.2	1.2	1.2	4.8	4.8	4.7	4.6	4.5	4.4	4.4	4.0
87,0°	1.2	1.5	1.2	1.2	1.2	1.2	1.2	3.6	3.6	3.6	3.5	3.5	3.4	3.4	3.4
88,0°	1.5	0.6	1.2	1.2	1.2	1.2	1.2	3.0	3.0	3.0	2.9	2.9	2.8	2.8	2.8
89,0°	0.3	0.6	1.2	1.2	1.2	1.2	1.2	2.4	2.4	2.3	2.3	2.3	2.2	2.2	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	298.6	218.2	138.7	84.4	60.2	52.1	46.6	43.7	42.7	40.7	38.5	35.7	34.5	33.6	33.1
74,0°	281.3	196.9	122.6	72.2	53.6	47.3	42.4	39.9	37.9	36.9	34.5	33.1	31.9	30.8	30.6
75,0°	253.8	172.0	102.0	61.9	48.2	42.3	38.0	35.0	33.6	32.2	30.9	29.7	28.9	28.4	28.0
76,0°	224.6	146.8	83.4	52.6	43.1	38.9	35.1	31.8	30.0	29.2	27.9	27.1	26.0	26.2	25.1
77,0°	192.0	120.5	63.4	43.5	37.1	34.0	29.9	30.0	27.5	26.6	25.3	24.1	23.5	23.3	22.7
78,0°	161.3	92.1	50.8	36.0	30.8	28.7	26.1	25.2	23.2	22.5	21.8	21.6	21.0	20.8	20.2
79,0°	136.9	76.0	40.2	30.0	26.0	23.8	21.8	21.0	20.2	19.4	18.7	18.6	18.3	17.7	17.6
80,0°	100.6	53.0	29.4	23.9	21.0	18.9	18.1	17.3	17.1	15.7	15.1	15.5	14.9	14.7	14.5
81,0°	73.0	38.3	22.0	18.1	16.0	15.2	13.8	13.6	13.4	12.7	12.6	12.4	12.3	11.7	11.7
82,0°	38.4	22.2	15.0	14.0	12.3	11.4	10.7	10.5	10.4	9.7	9.5	9.5	9.2	9.1	9.0
83,0°	22.1	12.6	9.5	8.6	8.5	8.3	7.5	7.4	7.3	7.2	6.5	6.9	6.3	6.2	6.1
84,0°	6.9	6.6	6.1	6.0	5.9	5.8	5.7	5.6	5.5	4.8	4.1	4.0	3.9	3.9	3.8
85,0°	4.8	5.3	3.9	3.8	3.9	3.9	3.8	3.7	3.1	3.6	2.5	2.4	2.3	2.2	2.1
86,0°	3.1	4.1	3.3	3.2	2.5	2.5	2.5	2.5	2.4	2.4	2.4	1.8	1.7	1.2	1.2
87,0°	3.3	2.5	2.5	2.6	2.5	2.5	1.8	1.9	1.8	1.8	1.8	1.2	1.2	1.2	1.2
88,0°	2.7	2.7	2.6	1.9	2.6	1.9	1.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	2.1	1.8	1.8	1.8	2.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	32.3	31.3	31.0	29.7	29.3	28.4	27.8	27.4	26.8	26.4	26.1	25.5	25.8	27.2	852.9
74,0°	29.9	29.2	28.5	27.3	26.9	25.7	25.3	24.4	24.0	23.4	23.0	22.1	22.7	26.3	879.2
75,0°	27.5	26.6	26.1	24.8	24.1	22.9	22.5	21.0	20.3	18.5	18.1	16.9	17.2	24.6	903.7
76,0°	25.0	23.8	23.6	22.4	21.6	19.6	18.6	16.4	15.1	12.4	11.7	9.8	10.4	22.1	925.9
77,0°	22.5	21.3	20.9	19.6	18.4	15.6	14.0	11.5	10.2	8.0	6.8	4.9	5.5	19.4	945.3
78,0°	20.1	18.8	17.9	16.5	14.6	12.1	10.5	8.3	6.8	5.8	4.0	3.1	3.1	16.0	961.3
79,0°	17.4	16.3	15.0	13.7	11.6	9.4	8.3	6.5	4.9	4.0	2.8	1.8	1.8	12.5	973.9
80,0°	14.6	13.9	12.6	11.3	9.0	7.4	6.5	4.9	4.0	2.5	2.1	1.2	1.2	9.5	983.4
81,0°	11.9	11.0	9.9	8.8	7.4	5.9	5.0	4.0	3.4	1.5	1.5	1.2	1.2	6.8	990.2
82,0°	8.9	7.8	7.1	6.4	5.7	4.4	3.5	3.1	2.5	1.2	1.2	1.2	1.2	4.4	994.6
83,0°	5.8	5.3	4.6	4.2	3.5	2.9	2.2	2.2	1.5	1.2	1.2	1.2	1.2	2.6	997.1
84,0°	3.3	2.9	2.4	2.4	2.2	1.6	1.6	1.6	1.2	1.2	1.2	0.9	1.2	1.4	998.5
85,0°	2.1	1.2	1.2	1.2	1.6	1.2	1.2	1.2	0.9	0.9	0.9	0.6	1.2	0.6	999.1
86,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.7	0.9	0.3	0.9	0.3	0.6	0.3	999.4
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.3	0.6	0.6	1.2	0.3	0.0	0.2	999.7
88,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.0	0.9	1.2	0.3	0.0	0.2	999.8
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.9	0.9	0.3	0.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
------------------------------------------	----------------------------------------------------------------	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	5680	37.1	38.5	37.8
95	241	252	5389	34.9	36.2	35.6
90	229	250	5121	33.0	34.1	33.6
85	216	248	4830	30.8	31.9	31.4
80	203	246	4540	28.8	29.8	29.3
75	190	243	4249	26.8	27.7	27.2
70	178	241	3980	25.0	25.8	25.4
65	165	238	3690	22.9	23.8	23.4
60	152	235	3399	21.1	21.8	21.5
55	140	232	3131	19.4	20.0	19.7
50	127	229	2840	17.5	18.1	17.8
45	114	225	2549	15.7	16.2	16.0
40	102	221	2281	14.1	14.6	14.4
35	89	216	1990	12.5	12.8	12.6
30	76	210	1700	10.7	11.1	10.9
25	63	203	1409	9.1	9.4	9.2
20	51	195	1140	7.6	7.9	7.8
15	38	184	850	6.1	6.2	6.2
10	26	171	581	4.7	4.8	4.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	5680	36.8	37.7	37.2
95	241	252	5389	34.7	35.6	35.2
90	229	250	5121	32.7	33.6	33.2
85	216	248	4830	30.7	31.5	31.1
80	203	246	4540	28.7	29.3	29.0
75	190	243	4249	26.7	27.3	27.0
70	178	241	3980	24.9	25.5	25.2
65	165	238	3690	22.9	23.5	23.2
60	152	235	3399	21.1	21.5	21.3
55	140	232	3131	19.4	19.8	19.6
50	127	229	2840	17.6	17.9	17.8
45	114	225	2549	15.8	16.1	16.0
40	102	221	2281	14.1	14.5	14.3
35	89	216	1990	12.5	12.7	12.6
30	76	210	1700	10.8	11.1	11.0
25	63	203	1409	9.2	9.4	9.3
20	51	195	1140	7.7	7.8	7.8
15	38	184	850	6.1	6.2	6.2
11	27	172	604	4.9	4.9	4.9

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
------------------------------------------	----------------------------------------------------------------	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5680	36.9	37.8	37.3
95	241	252	5389	34.7	35.6	35.2
90	229	250	5121	32.8	33.6	33.2
85	216	248	4830	30.7	31.5	31.1
80	203	246	4540	28.7	29.4	29.0
75	190	243	4249	26.7	27.3	27.0
70	178	241	3980	24.9	25.5	25.2
65	165	238	3690	22.9	23.4	23.2
60	152	235	3399	21.1	21.5	21.3
55	140	232	3131	19.4	19.7	19.5
50	127	229	2840	17.5	17.9	17.7
45	114	225	2549	15.8	16.1	16.0
40	102	221	2281	14.1	14.5	14.3
35	89	216	1990	12.4	12.6	12.5
30	76	210	1700	10.8	11.0	10.9
25	63	203	1409	9.1	9.3	9.2
20	51	195	1140	7.7	7.8	7.8
15	38	184	850	6.1	6.2	6.2
11	27	172	604	4.8	4.9	4.8

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A31G08GB EAN: 4058352723746	LP number 59080_252
------------------------------------------	----------------------------------------------------------------	-------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	5680.0	37.1
5.0	5680.0	36.8
15.0	5680.0	36.9