


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 9860 lm Power consumption = 70.9 W Luminous efficacy = 139.1 lm/W	serial documentation 12.09.2022



Luminous intensity in cd/klm C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 842 cd/klm**

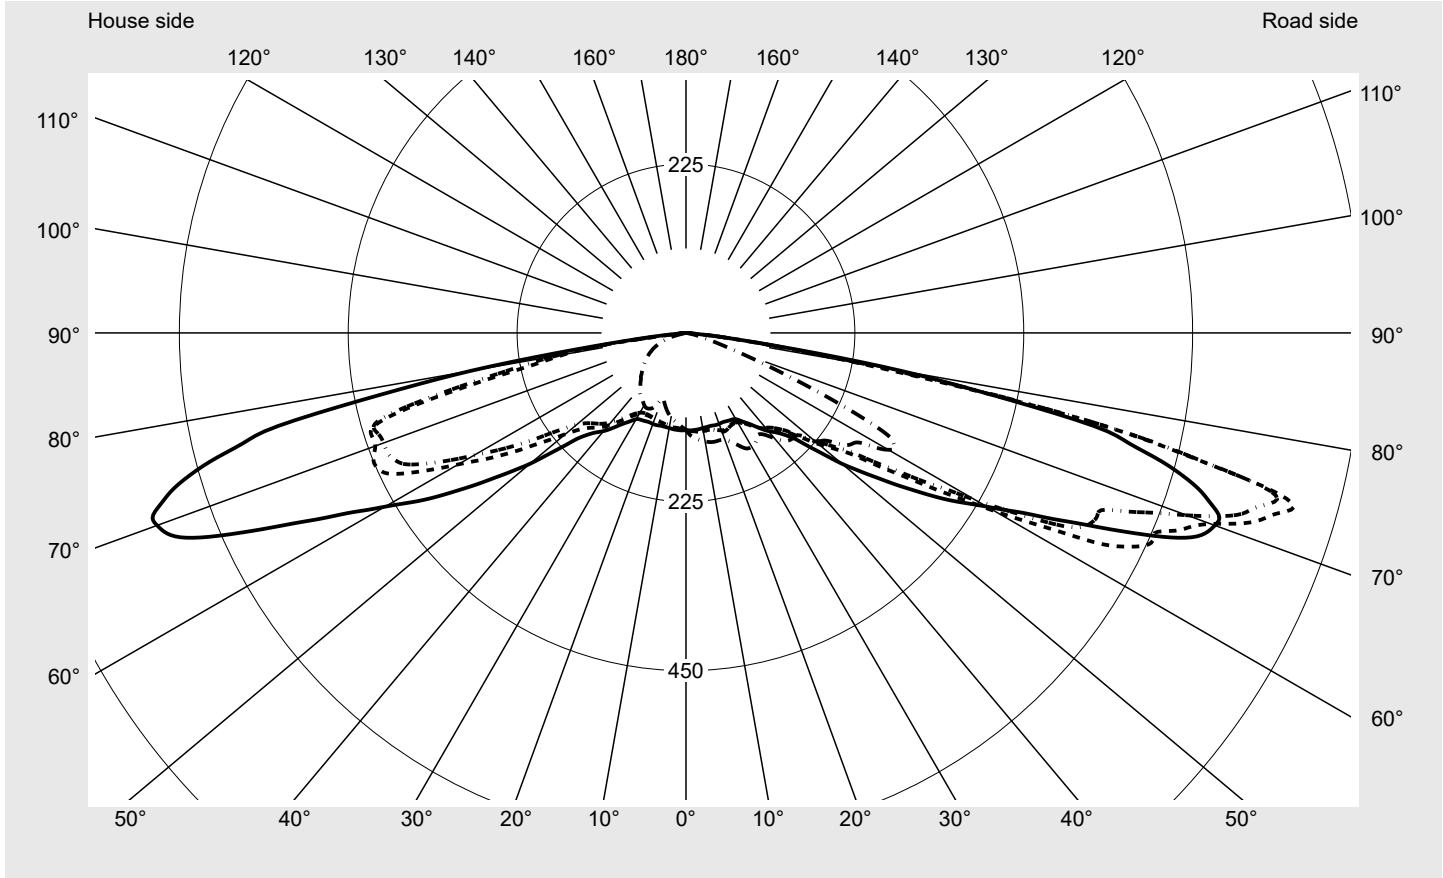

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	827.2
Imax 80°	295.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
---	--	--------------------------------------

Envelope curve in cd/klm **KMK 74°** **KMK 73°** **KMK 72°** **KMK 71°** **siteco**

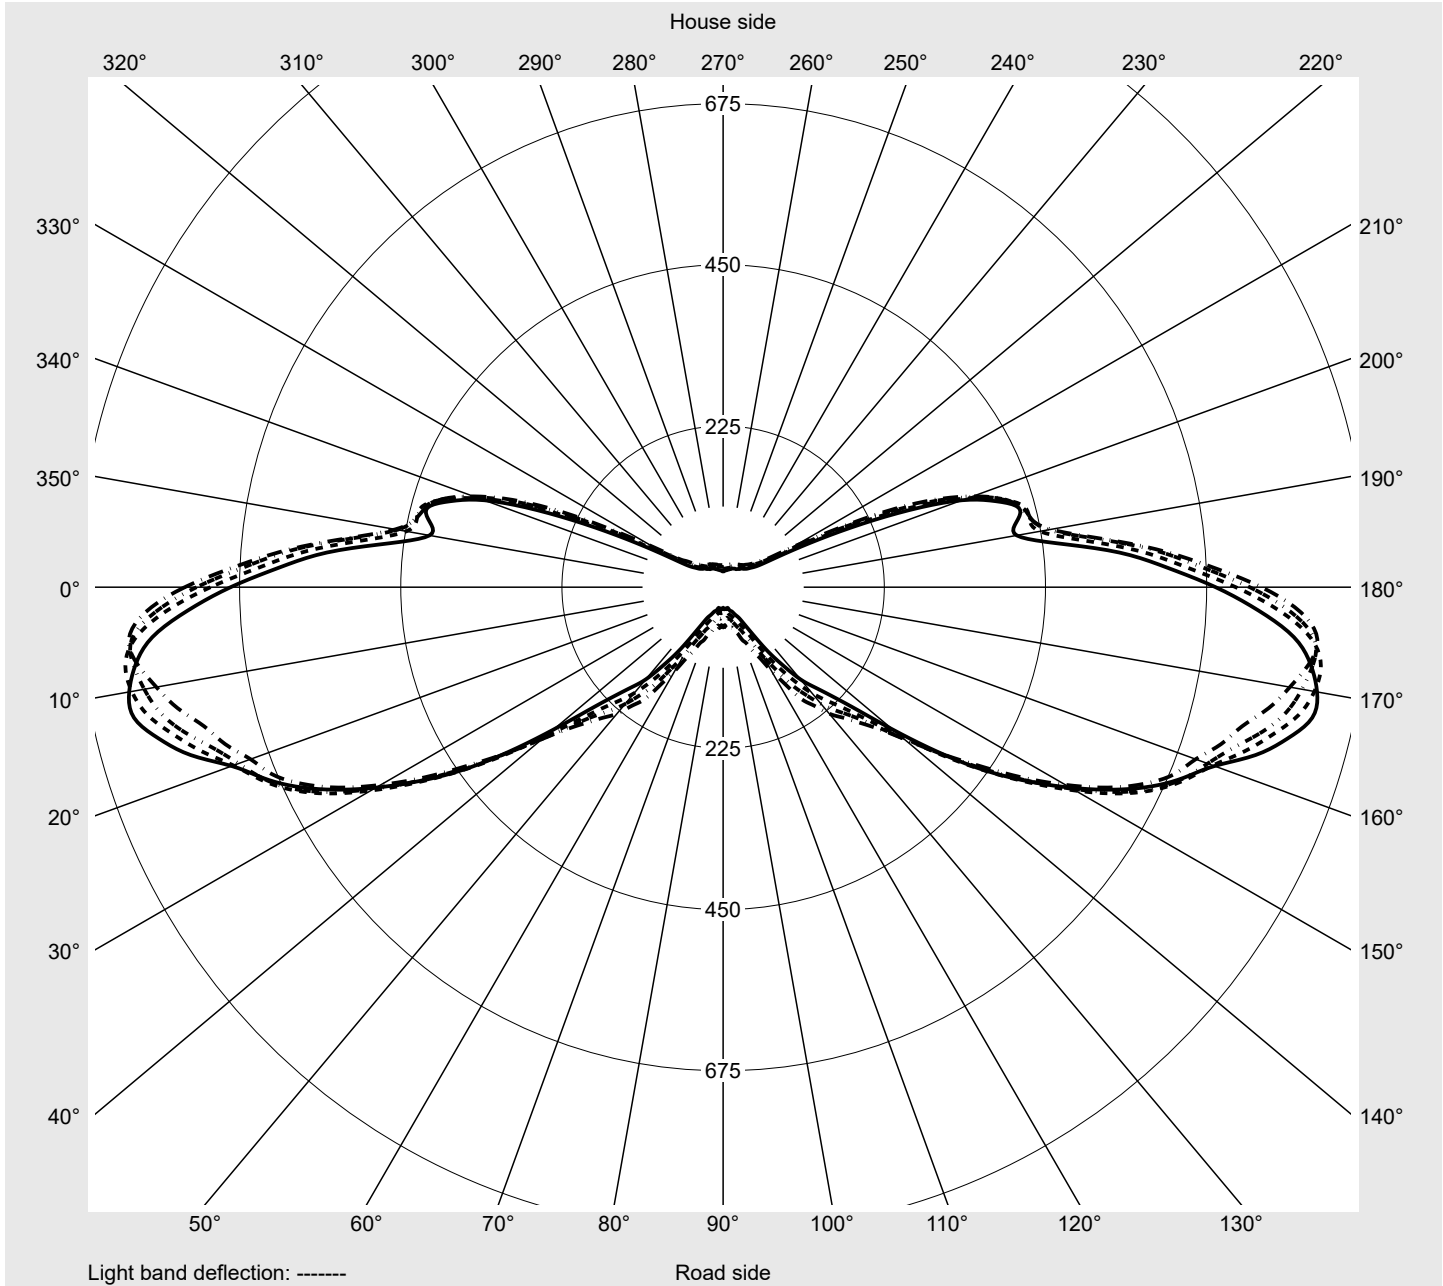

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	130.0	130.1	130.3	130.6	130.7	130.9	131.0	130.9	131.2	131.5	131.5	131.5	132.1	132.1	132.4
5,0°	129.8	130.2	130.2	130.3	130.9	131.5	131.5	132.7	132.7	132.3	133.9	133.9	133.9	133.9	133.9
7,5°	129.5	129.7	130.7	130.9	131.7	132.7	133.3	133.3	133.7	134.3	134.5	134.7	135.0	135.7	136.1
10,0°	128.7	129.4	130.3	131.2	131.8	132.9	133.5	133.4	134.1	134.5	135.0	135.6	135.9	136.5	137.0
12,5°	128.3	129.3	130.4	131.1	131.8	132.7	133.2	134.1	134.3	135.2	136.1	137.1	137.8	138.3	138.8
15,0°	128.1	129.8	131.2	131.9	132.4	133.5	133.6	134.9	135.7	137.1	138.3	139.0	139.8	140.4	141.4
17,5°	128.9	130.6	131.8	133.0	134.2	135.3	136.5	137.9	139.2	140.4	141.6	142.9	143.8	144.6	145.3
20,0°	129.0	131.1	133.1	134.7	136.9	138.3	140.4	142.3	143.6	144.7	145.7	146.7	147.5	148.3	149.5
22,5°	128.7	131.0	133.3	135.2	136.9	138.7	140.4	142.6	144.5	146.0	147.6	149.4	150.9	151.8	152.9
25,0°	129.5	131.5	133.4	134.4	135.5	136.8	137.9	139.1	141.8	144.2	146.7	149.1	151.4	154.4	156.5
27,5°	130.5	131.6	132.2	133.1	134.0	135.3	136.5	138.4	139.6	142.3	143.9	146.5	149.4	152.2	155.3
30,0°	132.7	133.8	134.2	135.4	136.5	136.4	137.5	138.9	139.5	141.3	142.6	144.2	145.6	148.3	152.2
32,5°	139.9	140.6	141.8	141.7	142.3	142.3	143.1	143.2	143.3	143.7	144.3	144.6	145.6	147.1	149.6
35,0°	148.3	149.2	149.7	150.8	151.6	150.5	149.9	150.7	150.4	149.4	148.7	147.3	146.8	147.3	149.2
37,5°	159.3	159.5	159.2	159.1	159.8	159.1	158.7	157.5	156.7	156.1	154.6	152.1	150.4	149.6	150.3
40,0°	170.7	169.7	168.2	167.0	166.3	166.1	164.9	163.2	161.8	160.8	159.4	157.5	155.7	153.6	151.4
42,5°	180.4	178.2	176.3	175.2	174.5	173.0	171.5	169.7	168.1	166.8	165.3	163.3	160.7	157.4	154.6
45,0°	195.4	192.7	189.9	187.8	186.5	185.0	182.8	181.1	178.8	176.6	173.8	169.4	164.9	161.5	157.9
46,0°	204.7	201.7	198.4	195.6	193.6	191.9	189.0	185.3	182.7	181.6	178.3	173.1	168.0	164.1	160.1
47,0°	219.1	215.1	210.6	206.8	203.4	200.3	197.7	194.3	190.5	187.5	183.4	177.4	171.8	167.6	163.2
48,0°	234.4	230.0	224.1	218.4	213.3	209.0	205.0	201.2	197.3	193.9	189.1	182.7	176.9	171.9	167.3
49,0°	252.0	247.1	240.5	232.8	226.0	219.8	214.6	210.1	205.5	201.0	195.7	189.1	182.6	177.0	171.9
50,0°	271.2	264.6	255.6	247.1	238.2	230.4	225.0	220.1	214.4	209.3	203.8	197.4	189.9	183.4	177.7
51,0°	287.4	280.4	270.8	259.5	248.1	239.5	233.6	228.7	222.9	218.5	213.2	206.8	198.2	191.4	186.0
52,0°	304.5	297.1	286.3	273.6	260.8	250.5	243.4	238.2	233.8	229.2	223.6	217.4	209.0	201.2	194.9
53,0°	322.3	314.6	303.6	289.0	273.2	262.0	255.3	249.7	245.0	241.4	235.7	229.6	222.1	214.4	206.3
54,0°	342.2	335.0	324.1	309.5	293.1	277.6	267.5	261.7	259.3	254.8	249.3	243.3	235.8	228.6	220.1
55,0°	361.7	356.4	346.0	333.0	318.1	302.6	289.6	281.4	276.4	271.0	265.2	258.5	250.4	243.4	235.7
56,0°	382.5	379.8	370.6	357.3	342.9	328.9	314.5	302.8	296.4	289.5	282.4	275.5	267.1	259.6	252.5
57,0°	403.7	407.8	402.4	392.4	374.9	358.8	341.0	329.3	318.1	309.3	300.0	292.1	283.2	275.7	267.0
58,0°	423.5	433.3	435.7	429.9	414.5	395.0	373.7	354.8	341.7	330.8	319.4	310.1	299.6	290.0	279.1
59,0°	442.1	458.9	465.8	463.5	452.4	431.7	404.3	382.4	366.8	352.5	338.5	326.1	312.5	300.3	288.5
60,0°	463.0	490.9	504.4	507.6	495.8	474.9	446.0	419.5	393.9	374.5	355.5	337.7	320.7	307.7	296.3
61,0°	486.8	523.8	544.1	550.3	537.9	517.7	486.6	453.7	419.9	393.1	368.4	346.4	327.0	313.1	304.0
62,0°	511.8	557.2	585.4	594.8	585.8	564.0	529.0	487.6	440.2	404.5	374.4	350.2	330.9	319.6	313.7
63,0°	544.5	595.1	624.1	641.8	640.8	617.8	568.0	510.4	453.0	410.8	378.0	355.4	339.2	331.7	326.8
64,0°	577.3	628.9	664.7	682.7	679.6	649.5	588.8	519.2	459.0	416.7	385.9	368.8	357.9	354.0	348.8
65,0°	616.2	672.3	706.3	726.2	715.2	671.5	596.9	519.9	464.8	429.9	405.1	393.4	383.3	378.5	366.7
66,0°	656.9	717.8	753.3	761.9	740.6	680.6	599.8	526.4	481.3	456.0	435.9	426.7	414.0	403.3	384.1
67,0°	696.5	765.3	796.9	790.2	747.7	680.0	603.4	543.4	510.0	491.9	476.9	467.3	447.0	426.5	400.2
68,0°	726.8	796.6	823.4	802.1	760.5	703.3	635.5	585.5	553.5	541.2	527.7	511.3	480.9	451.4	414.7
69,0°	742.6	807.9	826.0	806.4	771.3	720.6	668.9	639.2	610.6	599.9	580.0	553.5	514.6	471.5	422.7
70,0°	749.8	808.5	827.2	810.6	776.0	744.0	710.5	696.5	664.9	649.0	621.1	584.0	536.6	484.6	426.9
71,0°	751.5	807.4	832.7	824.7	803.3	780.0	750.1	728.7	702.0	681.9	649.2	605.7	551.9	494.1	433.6
72,0°	735.1	793.2	828.5	830.5	820.5	805.5	779.4	746.5	719.8	696.3	664.7	619.2	562.9	502.4	441.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	132.3	132.2	132.2	132.3	132.6	132.7	133.2	133.0	133.0	132.8	133.3	133.1	133.7	133.7	133.7
5,0°	134.2	134.6	135.0	134.6	135.2	135.3	135.7	136.2	136.3	136.8	137.3	137.4	137.8	138.2	138.8
7,5°	136.4	136.5	136.8	137.0	137.5	137.7	138.4	138.4	138.7	139.1	139.8	140.6	141.3	141.4	142.0
10,0°	137.6	137.7	138.4	138.8	139.3	140.0	139.9	141.0	141.0	140.9	142.3	142.9	144.0	144.6	144.9
12,5°	139.1	139.7	140.6	140.9	141.8	141.8	142.8	143.2	144.0	144.6	145.4	146.0	146.5	147.2	147.8
15,0°	141.7	142.7	143.5	144.3	144.5	145.1	145.7	146.4	146.5	146.8	148.2	148.2	149.0	149.0	149.0
17,5°	146.1	146.6	147.2	147.7	148.1	148.6	148.5	148.9	149.5	150.1	150.8	150.7	150.7	151.1	151.3
20,0°	150.4	151.0	152.0	152.3	152.2	152.0	152.7	152.7	152.7	153.1	153.8	153.7	154.3	154.4	154.4
22,5°	154.1	155.3	155.7	156.2	156.2	156.7	156.6	156.5	156.8	157.0	157.6	158.1	158.2	158.3	157.9
25,0°	158.4	159.8	160.4	160.8	160.8	161.8	161.1	161.5	162.8	163.5	164.6	165.9	165.4	165.3	165.2
27,5°	159.5	163.1	166.1	167.3	168.0	169.5	170.4	171.8	173.6	174.8	175.7	176.0	175.2	174.3	173.7
30,0°	157.8	163.8	170.1	175.4	179.1	181.2	182.8	183.3	184.4	186.1	186.5	185.3	182.1	179.7	179.5
32,5°	153.9	160.6	170.5	179.7	187.5	190.4	189.8	189.2	189.4	190.3	188.6	183.3	178.1	175.1	174.2
35,0°	153.4	159.2	166.6	176.2	185.1	190.5	189.9	186.6	184.1	183.4	181.2	176.9	173.5	170.8	169.7
37,5°	152.5	156.6	160.8	166.3	174.1	178.7	179.7	178.1	177.7	179.6	179.4	176.0	173.8	173.6	173.7
40,0°	150.7	152.6	156.2	158.0	160.9	166.4	172.0	175.8	178.3	180.1	181.2	182.6	185.0	186.8	187.8
42,5°	152.1	151.1	151.9	153.3	155.1	161.2	170.5	179.1	186.4	191.2	196.2	200.4	204.9	207.1	208.8
45,0°	154.4	152.4	151.4	152.2	154.4	161.2	173.9	187.8	197.9	206.4	214.4	219.2	220.4	221.0	220.6
46,0°	156.8	154.2	152.3	152.0	154.4	162.3	176.9	191.9	203.0	212.3	219.3	223.7	225.6	226.0	224.2
47,0°	159.3	155.9	153.5	152.9	155.4	163.2	179.7	196.9	208.7	216.6	223.5	227.8	229.7	229.5	227.0
48,0°	162.9	158.3	154.9	154.4	156.9	164.8	182.8	202.5	214.9	223.0	227.9	230.8	232.1	232.7	229.7
49,0°	167.0	161.6	157.6	156.5	158.6	167.3	186.6	205.1	218.0	227.9	233.7	235.2	235.5	232.7	227.4
50,0°	172.4	166.7	162.1	159.8	162.8	172.1	192.5	210.8	222.3	232.5	240.2	238.7	237.0	231.9	231.0
51,0°	179.5	173.2	168.4	165.8	167.9	178.2	199.4	217.3	228.7	242.7	247.0	242.8	240.7	239.5	240.4
52,0°	188.3	181.1	176.5	174.3	175.4	185.6	206.8	225.7	234.5	250.3	256.2	250.7	251.3	251.7	252.5
53,0°	199.1	192.5	187.3	184.8	187.3	197.4	216.4	234.3	243.1	255.2	262.6	261.0	261.3	261.6	259.5
54,0°	211.4	204.1	198.1	194.7	197.2	207.8	225.6	243.6	252.2	263.2	267.6	265.3	265.7	263.2	265.7
55,0°	225.6	216.7	210.3	205.8	207.3	217.9	235.7	253.0	260.3	267.9	267.4	266.0	264.8	268.9	272.9
56,0°	242.9	231.7	222.7	215.8	216.2	226.9	245.2	260.0	265.8	271.7	267.4	266.6	272.6	279.8	285.0
57,0°	256.6	242.7	230.7	222.5	224.4	237.4	256.6	270.0	275.0	276.9	273.4	278.4	287.1	293.0	294.1
58,0°	267.0	252.5	239.5	231.6	236.3	249.1	269.9	282.1	286.2	286.1	284.8	290.5	296.1	296.1	292.3
59,0°	275.1	261.5	251.5	246.7	251.1	265.1	284.7	293.7	293.8	291.6	290.8	291.7	291.7	287.0	280.5
60,0°	284.0	273.4	267.4	262.1	264.9	275.2	289.6	297.1	293.2	288.3	287.8	283.3	276.8	271.4	267.0
61,0°	295.2	288.3	282.9	276.8	275.2	283.2	292.3	296.7	291.1	284.7	275.8	264.0	256.0	253.0	248.6
62,0°	307.9	303.5	296.1	285.9	281.2	285.6	290.8	294.6	287.8	273.9	253.1	243.4	235.4	229.8	229.9
63,0°	325.0	318.0	303.9	290.6	283.2	285.9	289.3	289.9	273.7	253.6	233.3	221.8	211.9	211.9	209.1
64,0°	341.2	326.9	309.7	293.8	283.9	282.3	281.1	274.7	256.7	235.3	211.7	199.1	193.4	193.6	191.7
65,0°	352.8	333.3	312.2	294.7	281.7	276.4	271.5	261.8	241.0	218.1	194.4	183.9	179.8	185.1	187.2
66,0°	364.1	339.0	312.0	291.3	277.3	269.7	260.5	247.6	227.0	205.5	183.8	172.3	175.8	179.9	177.1
67,0°	372.5	340.2	309.8	288.3	273.9	261.1	249.4	234.9	216.6	195.2	174.3	169.9	169.0	168.7	160.7
68,0°	376.6	339.3	307.3	284.1	267.4	254.8	240.2	224.7	206.7	187.2	169.8	160.5	156.2	150.6	140.6
69,0°	378.0	337.0	303.1	279.7	261.4	248.2	230.0	216.2	197.6	177.5	156.8	143.5	133.4	125.9	112.3
70,0°	379.0	333.2	296.9	274.0	256.2	241.0	221.8	206.9	185.4	161.6	136.5	122.6	110.2	100.6	89.2
71,0°	380.2	329.5	291.8	266.6	246.9	230.4	208.3	190.5	159.5	134.8	111.8	98.3	84.6	78.5	68.0
72,0°	380.9	328.8	285.3	254.5	233.9	212.8	189.2	165.6	135.3	111.5	87.8	75.3	65.1	59.8	54.3

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	134.2	134.8	135.3	136.1	136.5	137.3	136.6	129.9	129.8	129.6	129.0	128.7	128.7	128.7	128.4
5,0°	139.4	140.0	140.1	140.7	141.4	140.9	140.7	129.5	129.1	128.7	128.3	127.4	127.4	126.6	126.8
7,5°	142.7	143.2	143.2	143.9	143.7	143.7	144.0	129.0	128.6	128.0	127.5	127.0	126.6	125.7	125.6
10,0°	146.5	146.2	146.2	146.6	146.9	147.1	146.8	127.8	127.1	126.8	126.3	125.9	125.2	124.3	123.7
12,5°	148.2	148.4	148.7	148.9	148.9	148.9	149.0	127.2	126.3	125.7	125.1	124.8	124.1	123.1	122.4
15,0°	149.6	149.6	149.8	149.9	149.2	150.1	149.9	126.9	125.7	124.8	124.4	123.7	122.8	121.6	121.8
17,5°	151.3	150.9	150.9	150.4	149.9	149.7	149.9	127.6	126.1	124.9	124.4	123.3	122.3	121.4	121.0
20,0°	153.6	152.6	151.9	151.5	151.4	151.1	151.7	127.5	125.9	124.5	123.3	122.4	121.4	120.7	119.9
22,5°	157.5	157.1	156.5	157.0	156.5	156.9	157.3	126.8	125.2	123.7	122.4	121.5	120.5	119.7	118.7
25,0°	165.1	164.2	164.7	165.5	165.0	165.5	165.2	127.3	125.4	123.8	122.5	121.3	120.1	118.6	117.2
27,5°	173.5	173.9	173.5	173.8	173.0	173.2	173.5	128.5	126.7	124.9	123.5	122.2	120.4	118.8	116.5
30,0°	178.9	177.7	177.0	176.3	176.8	176.0	175.1	131.7	130.5	128.3	126.4	125.1	122.8	120.4	118.1
32,5°	173.5	173.0	173.0	172.8	172.9	173.2	172.6	138.3	137.1	134.9	133.2	130.6	128.0	125.0	122.1
35,0°	170.0	168.9	167.3	167.4	167.1	167.1	166.5	147.9	146.5	144.5	141.9	139.4	136.1	132.2	128.5
37,5°	173.7	173.6	173.2	172.2	171.0	170.3	170.8	158.6	157.7	155.9	153.3	149.6	145.3	140.1	134.5
40,0°	188.8	190.4	190.0	187.7	185.1	185.5	183.1	170.8	170.5	168.8	165.4	160.8	155.4	148.2	140.3
42,5°	208.1	208.2	205.7	202.0	198.6	196.9	195.3	181.9	182.1	180.4	176.3	170.9	164.1	156.0	146.3
45,0°	219.8	219.1	211.9	206.8	202.3	200.3	199.6	196.8	195.8	192.1	185.9	178.7	170.7	161.6	149.9
46,0°	221.6	220.1	215.8	208.2	203.8	199.4	200.2	206.7	205.1	199.7	191.3	182.5	173.3	163.8	151.7
47,0°	225.1	220.0	216.5	208.6	202.4	199.4	200.9	220.4	217.5	209.6	198.4	187.1	176.4	166.0	153.5
48,0°	223.8	218.1	213.4	208.7	205.1	202.2	203.9	234.7	230.7	220.8	207.0	193.0	179.9	168.1	155.3
49,0°	225.4	221.9	218.0	215.3	213.6	213.8	211.3	252.4	247.3	235.2	218.0	200.6	184.6	170.9	156.9
50,0°	232.0	238.3	229.2	229.7	226.0	226.3	221.1	271.6	265.3	251.0	230.9	209.9	190.4	174.0	158.7
51,0°	245.9	254.8	243.7	239.2	234.6	232.2	229.1	288.6	281.5	265.8	244.0	220.5	197.9	178.4	160.7
52,0°	254.1	264.9	251.3	239.5	233.7	227.4	232.8	305.6	297.9	280.8	257.0	232.1	207.7	185.3	163.7
53,0°	260.6	268.5	258.6	250.6	245.3	241.8	240.2	323.0	314.0	295.0	269.5	243.8	218.8	194.4	170.5
54,0°	266.7	278.9	272.6	264.4	256.2	255.8	251.2	341.5	330.2	309.8	283.5	257.6	232.3	206.3	180.8
55,0°	279.0	284.8	282.6	277.9	267.3	266.0	260.4	358.0	344.1	323.7	298.3	273.1	248.0	220.9	192.8
56,0°	285.5	286.4	287.4	277.1	267.9	263.3	265.4	375.9	358.3	336.6	311.7	287.8	263.3	236.6	208.1
57,0°	292.4	287.8	284.1	272.9	266.3	263.3	268.4	393.0	371.9	349.2	325.6	303.1	278.7	252.5	226.6
58,0°	290.7	286.3	291.3	294.4	283.6	280.5	277.6	407.6	384.4	360.6	339.4	318.3	294.1	267.9	240.5
59,0°	278.7	278.8	289.0	302.1	302.5	298.0	297.9	419.7	394.1	371.3	352.6	333.1	309.5	284.0	258.1
60,0°	267.7	269.5	280.0	297.0	305.9	315.0	311.4	434.3	407.6	387.1	369.0	350.3	326.4	301.1	274.3
61,0°	249.9	252.8	265.4	286.0	308.3	317.7	317.6	450.6	421.7	403.7	387.6	370.0	345.0	318.0	288.7
62,0°	232.5	233.4	247.8	271.2	300.1	311.6	313.3	469.5	435.9	420.6	407.3	389.8	363.8	334.8	303.1
63,0°	210.5	214.1	229.5	256.6	289.2	307.1	304.1	497.2	456.6	439.8	427.7	409.9	382.2	351.1	315.1
64,0°	195.8	207.8	221.2	242.0	263.9	272.6	274.0	528.6	481.2	461.4	447.0	428.4	399.5	366.6	330.4
65,0°	193.0	195.0	200.9	209.0	222.4	228.7	232.2	566.7	509.6	482.8	462.0	441.7	413.6	380.6	343.9
66,0°	177.8	172.4	177.5	174.8	187.2	183.4	191.0	603.0	538.5	500.4	472.0	447.3	421.0	391.8	356.2
67,0°	155.5	148.8	147.2	145.6	152.3	149.9	152.3	631.8	566.0	518.3	478.9	450.1	425.8	400.5	365.3
68,0°	134.7	124.7	122.6	119.0	124.7	116.2	119.8	650.9	578.9	525.3	480.4	449.2	428.4	406.4	370.4
69,0°	104.5	96.5	91.9	88.9	92.3	87.9	93.4	662.8	586.6	524.4	475.2	444.8	428.8	409.6	374.1
70,0°	83.3	75.7	73.2	70.2	72.7	68.8	71.9	672.8	595.5	524.6	468.0	440.6	428.8	410.5	374.4
71,0°	64.9	58.0	57.5	54.0	57.0	53.2	55.9	678.9	607.0	526.4	464.7	439.8	429.5	409.7	370.6
72,0°	50.2	46.0	45.0	43.0	44.2	42.7	44.2	666.3	601.5	522.2	461.6	440.6	432.1	409.2	367.4

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
---	--	--------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	128.2	128.1	127.8	127.7	127.7	127.5	127.1	126.8	126.6	126.3	126.2	126.1	126.1	126.0	125.9
5,0°	126.9	126.5	125.9	125.4	125.4	125.3	124.9	124.4	123.9	123.9	123.5	123.2	122.8	122.5	122.5
7,5°	125.3	125.1	124.3	124.0	123.3	122.7	122.2	122.1	121.8	121.1	120.9	120.8	120.4	119.9	119.8
10,0°	123.9	122.6	121.8	121.7	121.7	121.0	120.4	120.1	119.7	119.7	119.6	119.1	118.5	118.3	117.8
12,5°	121.9	121.3	121.1	120.8	120.4	119.8	119.5	118.9	118.6	118.2	117.5	117.1	116.4	115.5	114.8
15,0°	120.4	120.6	119.3	119.3	118.7	118.6	118.2	117.2	116.3	115.7	115.0	114.2	113.2	112.3	111.2
17,5°	120.0	119.1	118.6	118.0	117.4	116.7	116.0	115.2	113.8	112.7	111.6	110.4	109.5	108.1	106.6
20,0°	118.6	118.1	117.7	116.7	115.9	114.6	113.4	112.2	110.8	109.1	107.7	105.8	104.0	102.0	100.2
22,5°	117.5	116.5	115.7	114.4	113.0	111.8	110.5	108.6	106.5	104.3	101.8	99.6	97.4	95.1	93.6
25,0°	116.1	114.9	113.7	112.6	111.4	108.9	106.4	104.0	100.4	97.8	94.9	92.8	91.3	89.7	88.7
27,5°	115.2	113.4	112.3	109.9	107.3	104.3	101.2	97.9	94.8	92.2	90.0	88.4	88.1	90.2	93.8
30,0°	115.2	113.9	110.3	107.0	103.4	99.8	95.6	92.7	89.8	88.1	87.1	89.4	93.5	98.4	103.7
32,5°	118.0	114.2	110.0	104.6	99.4	94.9	91.6	88.5	86.5	86.6	90.0	95.5	101.2	107.9	114.2
35,0°	123.1	117.2	109.8	102.4	96.5	91.5	87.3	85.2	85.9	89.2	94.5	101.0	107.7	114.2	119.5
37,5°	127.1	117.8	108.4	99.9	92.7	87.3	84.5	85.1	87.9	92.2	97.5	103.5	109.5	114.9	118.3
40,0°	130.1	117.6	106.1	95.9	88.2	84.0	84.2	87.3	91.0	94.3	98.5	103.2	107.5	110.8	111.7
42,5°	132.3	116.1	101.5	90.8	84.7	83.6	86.1	89.5	92.7	95.8	98.8	101.4	103.7	105.2	104.8
45,0°	132.9	113.6	97.6	87.9	84.7	86.1	88.9	91.1	93.2	95.3	97.0	98.4	99.1	98.8	97.5
46,0°	134.1	113.8	96.8	87.3	84.8	86.9	89.6	91.1	92.6	94.0	95.2	95.9	96.8	96.5	94.4
47,0°	135.5	114.2	96.4	87.2	86.1	88.2	89.9	91.1	92.1	92.5	93.4	93.9	94.3	93.7	91.4
48,0°	137.4	115.7	97.1	87.7	86.9	89.1	90.5	90.9	91.1	91.4	91.5	91.8	91.6	90.7	88.6
49,0°	139.2	117.5	98.4	88.8	88.0	90.1	90.7	90.3	90.0	89.5	89.6	89.7	89.0	87.9	85.9
50,0°	141.5	119.5	100.2	90.7	89.5	90.7	90.4	89.7	89.0	87.5	87.1	87.1	86.3	85.0	83.0
51,0°	142.6	122.1	103.3	92.8	91.3	92.2	91.0	89.6	87.8	85.9	84.5	84.0	82.7	81.4	80.3
52,0°	145.6	124.9	106.1	95.7	92.9	92.7	91.4	89.7	87.2	83.9	82.1	81.6	80.3	79.0	77.8
53,0°	149.7	128.4	109.4	98.4	95.5	94.1	91.8	89.3	86.0	82.5	80.1	79.3	78.2	76.7	75.5
54,0°	157.7	133.1	112.5	101.5	98.4	95.7	92.5	89.5	85.0	80.6	78.2	77.1	75.5	74.6	73.3
55,0°	166.4	140.2	117.6	104.4	99.6	96.3	92.6	88.2	83.2	78.6	75.7	74.3	73.2	72.3	70.9
56,0°	180.6	149.8	123.8	108.2	102.4	97.5	92.1	87.3	81.3	76.6	74.2	72.5	71.4	70.5	69.1
57,0°	197.8	164.1	133.4	112.4	104.1	97.9	91.6	85.5	79.5	74.6	72.0	70.6	69.4	68.6	66.8
58,0°	211.8	176.2	141.8	118.6	107.4	99.2	90.7	83.5	77.3	72.8	70.1	68.7	67.2	66.6	65.0
59,0°	228.1	190.9	153.0	125.5	110.3	99.6	90.0	82.2	75.5	71.0	68.4	66.8	65.1	64.4	63.2
60,0°	241.7	202.9	163.5	131.9	112.8	99.5	89.2	80.6	74.1	69.3	66.9	64.9	63.0	62.6	61.2
61,0°	255.1	213.4	172.0	139.1	117.1	100.1	87.3	78.2	72.0	68.0	65.1	63.1	61.4	60.5	59.0
62,0°	265.6	221.5	179.9	146.1	120.7	100.3	85.7	77.0	70.2	66.2	63.2	60.8	59.1	58.2	57.3
63,0°	274.1	228.8	185.4	149.5	121.3	99.4	84.2	74.2	68.4	64.3	61.3	59.0	57.2	56.1	55.7
64,0°	285.8	234.4	188.6	149.9	121.0	98.2	81.5	72.4	66.6	62.5	59.5	57.1	55.3	54.1	53.3
65,0°	294.0	239.3	189.9	149.1	116.5	94.6	79.2	70.0	64.2	60.2	57.6	55.3	53.5	52.2	51.1
66,0°	301.8	245.3	191.8	146.3	112.3	90.2	75.9	67.7	61.9	58.3	55.4	53.4	51.6	50.4	49.2
67,0°	310.4	249.2	190.8	139.6	105.4	85.2	72.3	64.4	60.1	56.4	53.4	51.0	49.3	48.6	47.5
68,0°	314.4	251.7	188.5	134.1	99.3	80.0	69.0	61.9	57.0	53.5	51.0	49.1	47.3	46.8	45.9
69,0°	318.7	252.9	183.3	127.5	92.5	76.0	64.9	58.2	53.6	50.9	48.0	46.5	44.4	44.6	43.3
70,0°	319.5	253.1	176.2	117.9	84.0	70.4	60.8	54.6	49.9	47.3	44.9	43.5	41.9	41.5	40.3
71,0°	318.7	249.1	168.2	110.7	75.1	64.1	56.1	50.5	46.9	44.4	42.0	40.6	39.3	38.6	37.4
72,0°	310.0	234.4	154.0	98.2	68.0	57.4	50.8	47.1	44.6	42.6	40.2	38.1	36.5	36.2	35.1

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	0.2	0.2
2,5°	125.8	125.7	125.6	125.6	125.5	125.5	125.4	125.3	125.3	125.3	125.3	125.3	125.3	1.6	1.7
5,0°	122.3	122.2	122.0	121.7	121.5	121.4	121.4	121.3	121.1	121.0	121.0	121.0	121.0	3.1	4.8
7,5°	119.5	119.4	119.2	119.1	118.7	118.0	118.0	118.0	118.0	118.0	117.9	117.9	117.9	4.6	9.5
10,0°	117.2	116.8	116.5	116.1	115.6	115.3	114.8	114.8	114.6	114.3	114.3	114.3	114.3	6.2	15.7
12,5°	114.2	113.6	112.6	112.3	111.6	111.2	110.7	110.4	110.0	109.5	109.4	109.3	109.3	7.7	23.3
15,0°	110.2	109.4	108.5	107.6	106.7	105.9	105.3	104.8	104.3	103.8	103.5	103.2	103.2	9.1	32.4
17,5°	105.0	103.8	102.4	101.3	100.2	99.2	98.4	97.6	97.1	96.8	96.9	96.2	96.4	10.6	43.0
20,0°	98.5	97.2	95.7	94.6	93.8	93.3	93.1	93.2	93.4	93.8	94.3	94.6	93.4	12.0	55.0
22,5°	92.4	91.4	91.0	91.6	93.2	95.2	97.4	99.6	101.2	103.2	104.0	104.7	105.0	13.6	68.6
25,0°	89.4	92.0	95.3	98.4	101.6	104.5	106.4	108.0	109.2	110.0	110.6	110.9	111.2	15.2	83.8
27,5°	97.9	102.1	105.9	109.0	111.2	112.5	113.3	113.5	113.5	113.5	113.3	113.0	113.0	17.0	100.7
30,0°	108.8	113.0	116.2	118.3	118.8	118.2	117.2	115.8	114.3	112.9	111.7	111.2	111.2	18.8	119.5
32,5°	118.5	121.1	122.0	121.4	119.9	118.2	115.9	113.3	110.8	109.2	107.8	107.2	107.2	20.4	139.9
35,0°	122.3	122.7	121.1	118.6	115.7	112.5	109.5	107.0	105.3	104.4	103.8	103.8	103.8	21.9	161.7
37,5°	118.4	116.4	113.4	109.6	106.4	103.8	102.0	100.7	100.3	99.9	100.0	100.1	100.4	23.4	185.1
40,0°	110.4	107.1	103.5	100.0	98.4	96.7	95.8	95.3	95.2	94.7	95.2	94.6	94.6	25.1	210.2
42,5°	102.7	99.2	96.2	94.3	92.6	91.2	90.6	89.9	90.0	89.6	89.5	89.2	89.7	27.1	237.3
45,0°	95.4	92.8	90.7	88.7	87.4	86.1	85.7	85.4	84.8	84.8	84.5	84.5	84.8	20.3	257.5
46,0°	92.3	89.9	88.4	86.8	85.3	84.1	83.6	83.2	82.7	82.6	82.6	82.6	83.5	12.0	269.6
47,0°	89.6	87.7	86.2	84.5	83.2	82.3	81.4	81.2	81.1	80.8	81.1	81.1	81.1	12.4	282.0
48,0°	87.0	85.2	83.9	81.8	81.1	79.9	79.3	79.0	79.2	78.7	79.3	79.2	79.2	12.8	294.8
49,0°	84.3	82.9	81.6	79.7	79.1	77.7	77.2	77.2	77.1	76.8	77.1	77.4	77.4	13.4	308.2
50,0°	81.8	80.2	79.0	77.7	77.4	75.9	75.3	75.1	75.3	75.0	75.3	75.9	75.6	14.0	322.2
51,0°	79.4	78.1	76.5	75.6	75.0	74.1	73.5	73.2	73.4	73.2	73.7	73.7	73.7	14.6	336.8
52,0°	77.0	76.0	74.9	73.8	72.9	72.2	71.6	71.4	71.6	71.6	71.9	71.9	71.9	15.3	352.1
53,0°	74.6	73.9	73.3	71.7	71.0	70.3	69.5	69.5	69.8	69.8	70.0	70.3	70.0	16.1	368.2
54,0°	72.3	71.3	71.3	69.8	69.2	68.5	67.6	67.7	67.9	67.9	68.2	68.2	68.2	17.0	385.2
55,0°	70.3	69.4	69.0	68.0	67.6	66.7	65.8	65.3	65.8	66.1	66.3	66.0	66.3	17.9	403.1
56,0°	68.0	67.5	66.8	66.0	65.8	64.6	63.9	63.3	63.6	63.9	64.5	64.2	64.5	18.8	422.0
57,0°	65.7	65.5	64.9	63.7	63.4	62.5	62.4	61.5	61.8	61.8	62.4	62.7	62.7	19.9	441.8
58,0°	63.8	63.3	63.0	61.9	61.2	60.3	60.0	59.4	59.7	59.9	60.2	60.8	60.8	21.0	462.8
59,0°	62.0	61.4	61.0	59.8	59.1	58.1	57.5	57.2	57.5	57.8	58.4	58.7	59.0	22.0	484.8
60,0°	60.1	59.3	58.7	57.6	56.9	56.0	55.6	55.1	55.4	55.9	56.5	56.8	57.1	23.0	507.8
61,0°	58.2	57.3	56.7	55.5	54.8	53.8	53.5	52.9	53.2	54.1	54.4	54.7	55.3	23.8	531.6
62,0°	56.4	55.5	54.3	53.3	52.6	51.7	51.3	50.8	51.3	51.7	52.2	52.8	52.8	24.5	556.1
63,0°	54.5	53.3	52.1	51.2	50.5	49.3	49.2	48.9	49.2	49.5	50.1	51.0	51.0	25.2	581.3
64,0°	52.7	51.2	50.0	48.8	48.3	47.1	47.1	46.8	47.0	47.4	48.2	48.8	49.1	25.7	607.0
65,0°	50.6	49.0	47.9	46.8	46.5	45.5	45.2	44.6	45.2	45.2	46.1	46.7	46.7	26.2	633.2
66,0°	48.4	47.0	46.5	45.1	44.6	43.8	43.3	42.5	43.1	43.1	43.6	44.2	44.2	26.7	659.9
67,0°	46.5	44.8	44.4	43.1	42.5	41.3	41.2	40.3	40.9	40.9	41.5	41.8	41.8	27.1	687.0
68,0°	44.5	42.9	42.3	41.3	40.3	39.1	38.8	38.5	38.7	38.5	39.3	39.3	39.3	27.6	714.6
69,0°	42.1	40.9	40.2	38.9	38.5	37.2	36.6	36.3	36.3	35.7	36.6	36.6	36.9	27.8	742.4
70,0°	39.7	38.4	37.7	36.7	36.4	35.4	34.8	33.9	33.8	33.5	33.5	33.5	33.8	27.9	770.3
71,0°	37.2	36.0	35.5	34.6	34.0	33.3	32.6	31.4	31.4	31.1	31.0	30.7	30.7	27.9	798.2
72,0°	34.8	33.6	33.4	32.2	31.5	30.8	30.2	29.5	29.2	28.6	28.9	28.3	28.3	27.6	825.8

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
---	--	--------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	715.6	779.1	824.2	841.6	838.1	823.1	794.4	762.7	727.5	700.2	667.8	623.7	567.8	507.8	446.5
74,0°	687.5	748.2	799.8	827.2	841.9	842.3	815.9	779.3	729.9	695.6	658.4	612.1	559.6	504.0	445.5
75,0°	651.6	701.3	748.4	774.9	800.0	804.8	799.9	771.0	717.3	674.7	631.6	580.3	534.9	485.6	426.3
76,0°	608.7	647.3	679.5	689.6	708.1	710.0	713.1	701.6	672.4	629.9	588.3	540.1	499.8	449.7	386.9
77,0°	567.9	591.4	613.0	614.5	622.5	621.0	626.0	616.5	596.1	565.6	533.9	486.1	445.6	392.9	336.5
78,0°	472.5	473.8	514.2	501.0	521.9	500.7	505.7	481.3	496.3	476.3	460.8	415.0	376.1	322.9	275.3
79,0°	375.2	360.7	361.2	350.5	357.1	355.1	374.0	364.8	383.9	370.5	367.3	329.3	301.1	249.1	210.3
80,0°	291.2	271.4	261.7	247.3	245.4	241.5	257.1	260.5	281.8	280.8	280.5	257.5	229.9	186.1	151.1
81,0°	190.7	180.2	174.1	167.4	165.9	162.1	162.3	163.6	192.2	200.0	206.8	198.4	180.8	146.2	112.5
82,0°	109.0	99.4	97.8	94.4	98.6	98.3	104.2	106.1	120.4	128.1	136.3	137.1	133.0	115.5	88.6
83,0°	60.8	57.5	59.6	58.3	60.8	58.8	59.1	55.9	72.0	76.5	84.2	85.7	83.9	74.8	66.2
84,0°	29.7	27.9	29.7	29.7	32.8	34.2	37.6	37.0	41.7	44.4	52.4	56.6	55.7	43.5	34.9
85,0°	6.7	6.3	6.4	6.5	8.1	8.4	12.6	14.0	24.2	25.5	28.4	28.0	22.6	11.1	7.3
86,0°	4.9	4.4	4.4	4.4	4.5	4.7	4.8	5.1	10.2	10.5	12.0	11.2	10.9	7.1	5.2
87,0°	3.7	3.8	3.8	3.9	4.0	3.3	3.3	2.5	3.4	2.8	2.8	2.9	2.8	2.4	2.4
88,0°	3.1	2.5	2.5	2.5	2.5	2.5	2.5	2.7	2.5	2.5	2.5	2.1	1.7	1.7	1.8
89,0°	2.5	2.5	2.5	2.6	2.5	2.9	2.9	2.1	2.2	1.9	2.0	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	384.7	323.9	274.7	239.4	215.1	193.2	167.1	139.2	111.1	87.1	67.0	58.7	51.8	47.1	43.6
74,0°	377.9	309.4	252.7	215.3	189.7	168.1	138.2	110.5	80.9	60.9	49.0	44.0	40.0	36.3	34.7
75,0°	351.5	282.7	226.5	192.0	166.5	141.4	111.3	81.5	57.4	46.0	37.9	34.6	32.5	31.3	29.1
76,0°	312.4	248.2	198.9	167.2	141.0	114.1	81.3	57.8	41.7	35.9	31.2	27.8	24.7	23.2	20.7
77,0°	268.5	209.2	164.2	137.9	111.2	83.3	56.1	40.2	32.0	27.5	22.3	20.1	17.5	17.1	15.2
78,0°	216.5	171.6	134.8	112.8	83.6	60.3	40.6	30.0	24.3	20.2	17.4	16.0	14.0	12.4	11.2
79,0°	164.5	134.3	106.7	87.7	62.4	43.7	28.4	22.9	16.9	15.1	11.1	10.3	9.0	9.0	7.6
80,0°	121.9	102.2	85.4	65.8	38.8	26.7	20.0	14.8	12.3	9.7	7.5	6.8	6.0	6.0	5.2
81,0°	86.5	76.7	53.2	29.6	21.8	17.2	13.5	10.1	7.4	6.0	5.5	4.8	4.8	4.8	4.8
82,0°	50.7	38.4	30.2	14.8	10.4	10.4	7.9	6.6	5.3	4.7	3.1	3.1	3.5	3.6	3.6
83,0°	36.4	26.3	18.5	10.6	6.5	6.4	6.0	4.8	4.2	3.5	3.5	3.5	1.9	1.8	1.8
84,0°	26.3	9.4	6.3	5.7	4.6	4.6	3.2	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8
85,0°	5.9	4.3	3.1	2.5	2.5	2.5	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8	2.1
86,0°	3.0	2.5	2.5	2.5	1.9	1.9	2.0	1.8	2.0	1.8	2.0	2.1	2.1	2.1	1.2
87,0°	1.9	1.8	1.9	1.9	1.2	1.2	1.2	2.0	1.2	2.0	1.2	1.2	1.5	1.2	1.2
88,0°	1.8	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.2	0.6	1.5	1.2
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	0.4	1.4	0.6	0.6	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	40.9	38.8	35.9	34.7	36.5	35.6	35.6	646.5	582.2	504.2	449.0	438.0	435.0	407.6	362.2
74,0°	32.7	29.7	31.1	30.0	30.4	30.7	28.9	621.1	555.2	469.8	416.2	419.3	427.5	399.2	354.9
75,0°	27.7	24.2	22.7	20.9	20.3	19.7	22.1	592.8	525.7	424.7	366.4	376.8	394.9	376.0	331.4
76,0°	19.8	17.8	17.1	17.2	16.3	15.7	16.6	560.0	489.3	371.9	309.5	318.6	343.2	338.3	301.5
77,0°	15.2	13.8	12.9	13.5	13.2	12.9	12.9	519.9	438.9	306.8	253.0	262.1	291.9	295.5	267.3
78,0°	11.2	10.7	10.7	9.2	9.8	8.3	9.8	440.2	374.7	243.6	203.4	215.0	245.6	254.7	228.1
79,0°	7.9	7.0	7.0	6.1	7.0	6.1	7.4	371.6	318.4	205.4	175.1	187.0	210.9	219.8	201.7
80,0°	4.3	4.6	4.6	4.6	4.6	4.6	4.9	295.3	256.2	170.4	156.9	164.0	177.3	179.6	153.7
81,0°	4.9	4.0	4.0	4.3	4.3	4.3	3.7	196.2	181.0	135.4	134.7	137.2	138.3	133.0	114.9
82,0°	3.6	3.6	3.4	2.5	2.5	2.5	3.1	123.5	127.4	97.7	98.0	93.8	90.5	81.3	58.9
83,0°	1.8	1.8	2.7	2.8	2.8	2.5	2.5	67.1	71.7	45.5	36.9	29.9	35.8	35.3	34.5
84,0°	2.1	1.8	2.1	2.1	2.1	3.1	2.5	31.6	32.3	21.5	12.4	8.9	12.9	14.0	6.8
85,0°	1.0	2.1	1.2	1.2	1.2	1.2	1.8	6.1	7.0	6.4	6.3	5.8	6.0	5.6	5.5
86,0°	2.1	1.2	1.2	1.2	1.2	1.2	1.2	4.8	4.8	4.7	4.6	4.5	4.4	4.4	4.0
87,0°	1.2	1.5	1.2	1.2	1.2	1.2	1.2	3.6	3.6	3.6	3.5	3.5	3.4	3.4	3.4
88,0°	1.5	0.6	1.2	1.2	1.2	1.2	1.2	3.0	3.0	3.0	2.9	2.9	2.8	2.8	2.8
89,0°	0.3	0.6	1.2	1.2	1.2	1.2	1.2	2.4	2.4	2.3	2.3	2.3	2.2	2.2	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	298.6	218.2	138.7	84.4	60.2	52.1	46.6	43.7	42.7	40.7	38.5	35.7	34.5	33.6	33.1
74,0°	281.3	196.9	122.6	72.2	53.6	47.3	42.4	39.9	37.9	36.9	34.5	33.1	31.9	30.8	30.6
75,0°	253.8	172.0	102.0	61.9	48.2	42.3	38.0	35.0	33.6	32.2	30.9	29.7	28.9	28.4	28.0
76,0°	224.6	146.8	83.4	52.6	43.1	38.9	35.1	31.8	30.0	29.2	27.9	27.1	26.0	26.2	25.1
77,0°	192.0	120.5	63.4	43.5	37.1	34.0	29.9	30.0	27.5	26.6	25.3	24.1	23.5	23.3	22.7
78,0°	161.3	92.1	50.8	36.0	30.8	28.7	26.1	25.2	23.2	22.5	21.8	21.6	21.0	20.8	20.2
79,0°	136.9	76.0	40.2	30.0	26.0	23.8	21.8	21.0	20.2	19.4	18.7	18.6	18.3	17.7	17.6
80,0°	100.6	53.0	29.4	23.9	21.0	18.9	18.1	17.3	17.1	15.7	15.1	15.5	14.9	14.7	14.5
81,0°	73.0	38.3	22.0	18.1	16.0	15.2	13.8	13.6	13.4	12.7	12.6	12.4	12.3	11.7	11.7
82,0°	38.4	22.2	15.0	14.0	12.3	11.4	10.7	10.5	10.4	9.7	9.5	9.5	9.2	9.1	9.0
83,0°	22.1	12.6	9.5	8.6	8.5	8.3	7.5	7.4	7.3	7.2	6.5	6.9	6.3	6.2	6.1
84,0°	6.9	6.6	6.1	6.0	5.9	5.8	5.7	5.6	5.5	4.8	4.1	4.0	3.9	3.9	3.8
85,0°	4.8	5.3	3.9	3.8	3.9	3.9	3.8	3.7	3.1	3.6	2.5	2.4	2.3	2.2	2.1
86,0°	3.1	4.1	3.3	3.2	2.5	2.5	2.5	2.5	2.4	2.4	2.4	1.8	1.7	1.2	1.2
87,0°	3.3	2.5	2.5	2.6	2.5	2.5	1.8	1.9	1.8	1.8	1.8	1.2	1.2	1.2	1.2
88,0°	2.7	2.7	2.6	1.9	2.6	1.9	1.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	2.1	1.8	1.8	1.8	2.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	32.3	31.3	31.0	29.7	29.3	28.4	27.8	27.4	26.8	26.4	26.1	25.5	25.8	27.2	852.9
74,0°	29.9	29.2	28.5	27.3	26.9	25.7	25.3	24.4	24.0	23.4	23.0	22.1	22.7	26.3	879.2
75,0°	27.5	26.6	26.1	24.8	24.1	22.9	22.5	21.0	20.3	18.5	18.1	16.9	17.2	24.6	903.7
76,0°	25.0	23.8	23.6	22.4	21.6	19.6	18.6	16.4	15.1	12.4	11.7	9.8	10.4	22.1	925.9
77,0°	22.5	21.3	20.9	19.6	18.4	15.6	14.0	11.5	10.2	8.0	6.8	4.9	5.5	19.4	945.3
78,0°	20.1	18.8	17.9	16.5	14.6	12.1	10.5	8.3	6.8	5.8	4.0	3.1	3.1	16.0	961.3
79,0°	17.4	16.3	15.0	13.7	11.6	9.4	8.3	6.5	4.9	4.0	2.8	1.8	1.8	12.5	973.9
80,0°	14.6	13.9	12.6	11.3	9.0	7.4	6.5	4.9	4.0	2.5	2.1	1.2	1.2	9.5	983.4
81,0°	11.9	11.0	9.9	8.8	7.4	5.9	5.0	4.0	3.4	1.5	1.5	1.2	1.2	6.8	990.2
82,0°	8.9	7.8	7.1	6.4	5.7	4.4	3.5	3.1	2.5	1.2	1.2	1.2	1.2	4.4	994.6
83,0°	5.8	5.3	4.6	4.2	3.5	2.9	2.2	2.2	1.5	1.2	1.2	1.2	1.2	2.6	997.1
84,0°	3.3	2.9	2.4	2.4	2.2	1.6	1.6	1.6	1.2	1.2	1.2	0.9	1.2	1.4	998.5
85,0°	2.1	1.2	1.2	1.2	1.6	1.2	1.2	1.2	0.9	0.9	0.9	0.6	1.2	0.6	999.1
86,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.7	0.9	0.3	0.9	0.3	0.6	0.3	999.4
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.3	0.6	0.6	1.2	0.3	0.0	0.2	999.7
88,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.0	0.9	1.2	0.3	0.0	0.2	999.8
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.9	0.9	0.3	0.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9860	70.9	75.1	73.0
95	241	252	9355	65.9	69.9	67.9
90	229	250	8890	61.6	65.3	63.4
85	216	248	8385	57.1	60.5	58.8
80	203	246	7880	52.8	55.8	54.3
75	190	243	7376	48.7	51.5	50.1
70	178	241	6910	45.0	47.6	46.3
65	165	238	6405	41.2	43.6	42.4
60	152	235	5900	37.5	39.5	38.5
55	140	232	5435	34.2	36.1	35.2
50	127	229	4930	30.7	32.4	31.6
45	114	225	4425	27.5	28.9	28.2
40	102	221	3960	24.4	25.7	25.0
35	89	216	3455	21.3	22.4	21.8
30	76	210	2950	18.2	19.1	18.6
25	63	203	2446	15.4	16.1	15.8
20	51	195	1980	12.7	13.3	13.0
15	38	184	1475	9.9	10.3	10.1
11	27	172	1048	7.9	8.0	8.0

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9860	69.0	71.9	70.4
95	241	252	9355	64.5	67.1	65.8
90	229	250	8890	60.4	62.9	61.6
85	216	248	8385	56.2	58.4	57.3
80	203	246	7880	52.1	54.1	53.1
75	190	243	7376	48.1	50.0	49.0
70	178	241	6910	44.5	46.3	45.4
65	165	238	6405	40.9	42.5	41.7
60	152	235	5900	37.2	38.7	38.0
55	140	232	5435	34.0	35.3	34.6
50	127	229	4930	30.7	31.8	31.2
45	114	225	4425	27.4	28.3	27.8
40	102	221	3960	24.4	25.3	24.8
35	89	216	3455	21.2	22.1	21.6
30	76	210	2950	18.3	18.9	18.6
25	63	203	2446	15.4	15.9	15.6
20	51	195	1980	12.8	13.2	13.0
15	38	184	1475	10.0	10.3	10.2
11	27	172	1048	8.0	8.1	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9860	69.8	72.8	71.3
95	241	252	9355	65.0	67.8	66.4
90	229	250	8890	60.9	63.5	62.2
85	216	248	8385	56.5	58.8	57.6
80	203	246	7880	52.4	54.4	53.4
75	190	243	7376	48.4	50.3	49.3
70	178	241	6910	44.7	46.5	45.6
65	165	238	6405	41.0	42.5	41.8
60	152	235	5900	37.4	38.7	38.0
55	140	232	5435	34.1	35.4	34.8
50	127	229	4930	30.6	31.8	31.2
45	114	225	4425	27.4	28.3	27.8
40	102	221	3960	24.4	25.3	24.8
35	89	216	3455	21.3	22.0	21.6
30	76	210	2950	18.3	18.8	18.6
25	63	203	2446	15.4	15.9	15.6
20	51	195	1980	12.7	13.1	12.9
15	38	184	1475	10.0	10.3	10.2
11	27	172	1048	7.9	8.0	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2A41G08HB EAN: 4058352724002	LP number 59080_387
--	--	--------------------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	9860.0	70.9
5.0	9860.0	69.0
15.0	9860.0	69.8