


# Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> <b>59082_111</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> asymmetric, wide distribution (ST0.8a G) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 2200 K   CRI ≥ 70 <b>Controlgear</b> EVG-Smart Interface <b>Rated values</b> Net luminous flux = 18780 lm Power consumption = 151.2 W Luminous efficacy = 124.2 lm/W	<b>serial documentation</b> <b>23.08.2022</b>



**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 536 cd/klm**

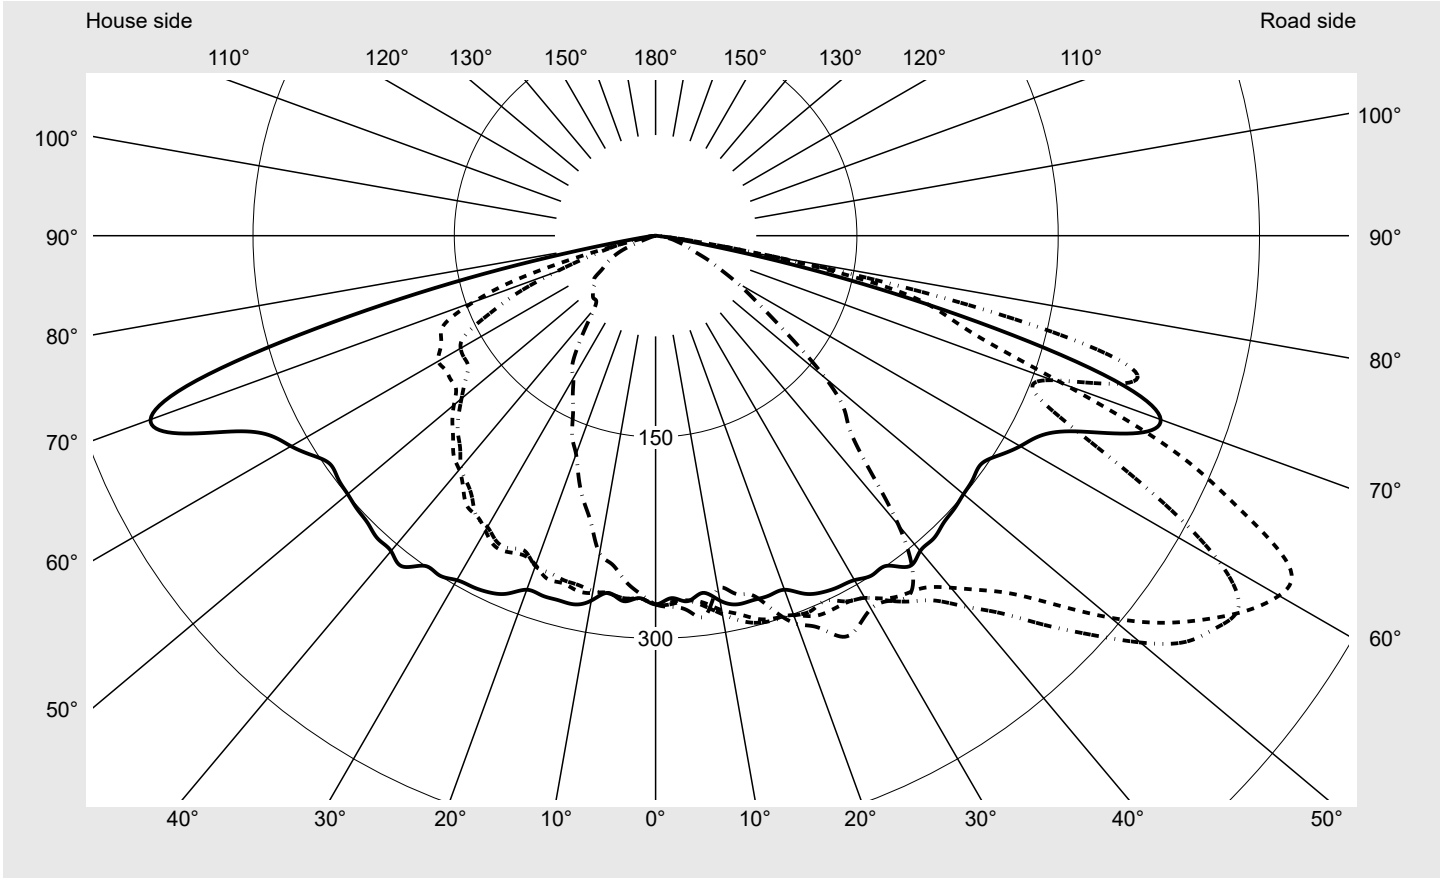

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G4
Imax 70°	493.9
Imax 80°	97.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> 59082_111
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

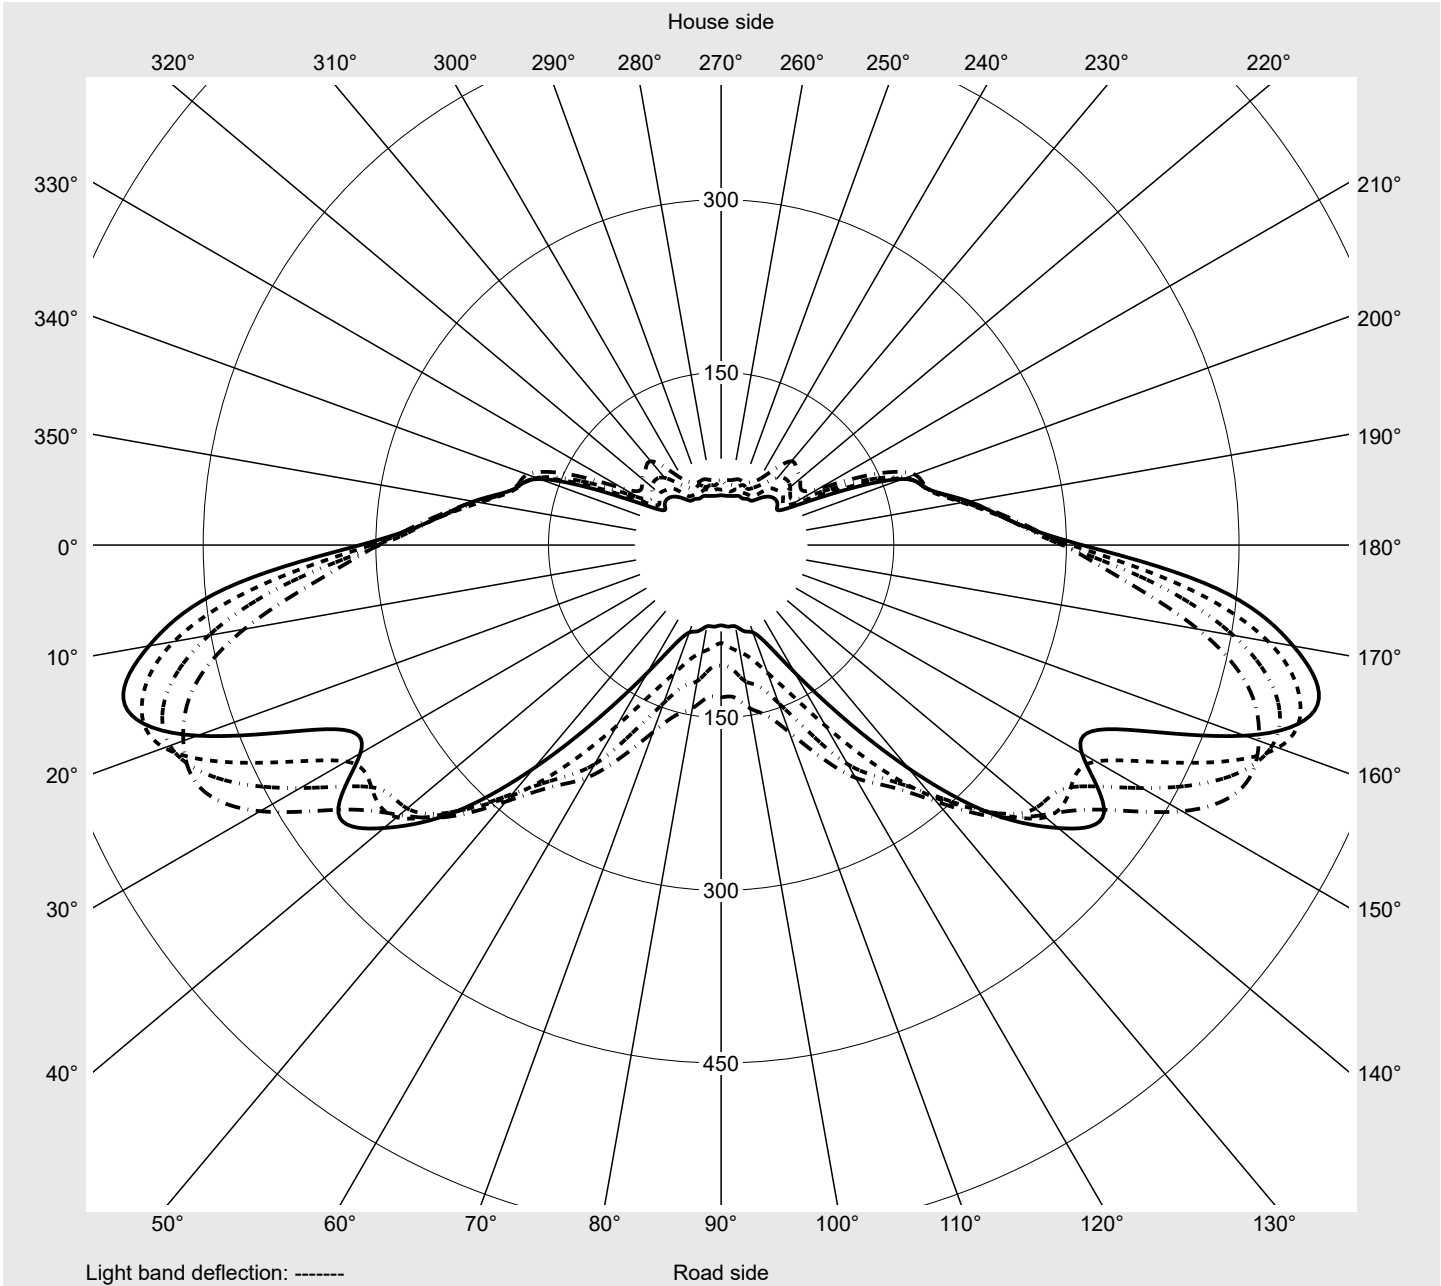

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> <b>59082_111</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	270.3	270.4	271.5	273.2	274.7	274.7	274.1	274.2	274.4	274.0	277.0	277.1	276.6
5,0°	273.4	274.3	273.6	272.7	273.3	272.3	273.5	276.6	278.8	280.3	282.6	283.8	283.6
7,5°	268.4	272.0	274.5	275.9	278.4	281.1	280.9	281.1	283.3	281.4	281.4	282.2	283.4
10,0°	276.1	275.9	278.7	283.3	286.3	286.9	286.0	284.7	284.2	281.9	279.6	277.1	277.3
12,5°	281.3	282.2	283.7	288.9	293.9	293.8	293.7	291.9	286.3	284.1	279.7	275.7	274.4
15,0°	281.1	288.0	292.4	295.7	298.6	296.0	289.7	288.1	284.8	282.9	277.7	276.9	276.0
17,5°	281.1	290.6	297.2	298.7	299.8	298.7	288.5	285.6	284.8	283.6	284.4	283.4	282.6
20,0°	280.7	292.1	296.6	300.8	301.1	293.8	288.4	289.1	289.4	289.7	292.3	294.8	294.6
22,5°	288.7	295.6	305.2	306.8	302.6	291.6	294.7	298.4	296.3	302.0	304.4	307.3	310.9
25,0°	293.3	302.1	310.2	308.2	300.0	304.4	300.3	306.0	314.5	315.8	322.6	327.6	328.1
27,5°	295.1	304.0	315.6	308.2	307.2	309.0	311.5	316.2	322.4	331.3	341.0	342.3	347.8
30,0°	296.3	310.5	318.6	311.7	311.7	317.3	321.0	328.4	335.1	348.1	357.8	362.2	361.1
32,5°	300.0	316.4	321.2	320.4	322.3	332.0	333.6	347.0	358.3	367.3	373.3	381.7	372.6
35,0°	300.3	319.7	321.7	325.6	332.6	343.0	357.1	367.9	377.8	390.3	388.6	387.7	369.4
37,5°	310.5	323.4	327.5	330.5	342.7	360.8	372.5	392.7	414.1	412.2	402.6	386.6	372.5
40,0°	306.7	330.8	334.6	342.4	361.1	375.6	400.5	408.6	435.7	427.5	406.4	389.1	370.1
42,5°	306.3	335.9	340.9	358.1	381.7	400.9	421.0	435.6	445.3	435.6	399.0	382.7	355.5
45,0°	303.2	331.0	352.9	377.7	410.2	434.3	445.3	455.7	442.6	423.9	389.8	341.8	303.3
47,5°	301.6	336.5	377.0	408.1	440.1	460.6	469.6	457.4	422.0	387.5	349.8	300.0	258.6
50,0°	299.6	347.6	392.2	442.9	471.5	482.6	470.8	441.6	392.0	354.8	309.2	269.5	243.1
52,5°	298.1	351.8	420.7	473.8	497.3	499.2	462.5	400.7	364.8	333.6	290.9	256.4	233.4
55,0°	296.4	377.3	452.0	498.7	509.7	480.6	422.2	367.6	356.1	327.6	282.3	247.9	219.8
57,5°	304.1	401.5	482.8	520.7	515.0	447.7	376.1	370.2	367.9	327.8	285.1	233.0	181.5
60,0°	313.7	432.1	504.8	536.4	484.2	378.6	362.0	406.0	382.5	328.5	253.1	180.4	127.9
62,5°	323.0	454.5	522.9	531.9	420.3	344.5	406.4	437.2	400.9	298.6	180.8	103.7	72.0
65,0°	344.9	474.6	534.2	478.7	349.3	355.5	461.5	463.3	369.4	197.1	86.0	60.4	50.6
67,5°	384.9	502.1	523.3	416.2	305.9	418.2	501.2	453.1	243.9	95.6	57.8	47.3	41.7
70,0°	400.5	466.7	464.5	324.8	314.9	493.9	484.0	328.4	125.6	60.9	45.2	38.8	34.8
72,5°	358.5	358.7	351.8	254.6	365.9	485.2	394.2	184.1	76.3	45.4	33.5	30.2	27.1
75,0°	248.8	218.0	225.7	220.3	356.9	392.4	267.8	98.5	34.6	31.5	29.4	24.9	21.7
77,5°	130.6	113.0	145.7	175.3	240.1	233.3	127.5	42.6	21.2	23.4	23.0	16.7	15.6
80,0°	34.5	28.3	60.6	84.1	88.8	97.8	40.6	17.8	14.2	16.4	14.0	11.1	11.6
82,5°	7.5	5.6	9.8	16.6	21.5	20.4	10.9	7.9	8.8	8.6	8.9	5.8	7.0
85,0°	1.1	1.2	1.1	1.3	1.4	1.9	2.3	2.1	2.2	2.7	3.5	2.8	2.3
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> <b>59082_111</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	277.3	277.3	277.6	276.6	277.0	276.8	270.8	271.1	270.4	270.8	270.2	268.3	267.7
5,0°	281.9	281.9	278.2	280.1	281.1	280.6	273.6	273.0	271.7	271.1	269.1	268.2	265.4
7,5°	283.5	282.9	281.4	281.0	282.1	285.4	268.8	268.8	268.5	268.8	266.7	267.0	264.4
10,0°	279.2	274.9	270.8	268.5	269.2	267.3	274.9	272.6	270.4	268.7	265.5	260.5	259.1
12,5°	272.1	272.1	273.6	269.2	269.2	273.1	277.7	274.5	270.9	266.6	261.3	260.1	257.8
15,0°	276.2	274.6	273.2	280.0	279.6	277.2	274.9	270.0	268.0	265.6	261.1	253.1	248.9
17,5°	285.8	287.0	285.3	286.6	289.2	292.9	272.7	272.3	268.1	263.3	259.7	253.3	247.5
20,0°	299.1	299.4	301.3	300.1	304.9	307.8	276.8	266.0	261.2	262.0	255.9	246.8	236.8
22,5°	313.3	316.0	319.4	316.6	317.2	315.9	280.7	268.4	257.6	254.4	250.0	238.1	227.3
25,0°	332.9	331.7	329.1	327.2	327.4	329.8	278.2	269.4	260.1	257.0	246.4	228.9	216.0
27,5°	347.9	343.4	339.0	334.3	330.1	327.7	279.9	264.3	260.3	256.8	239.8	225.1	209.4
30,0°	360.9	348.0	335.3	330.2	324.7	321.0	279.0	262.4	253.7	250.7	238.4	217.0	198.0
32,5°	362.6	347.1	334.4	330.4	326.1	322.8	284.1	262.1	247.8	248.2	226.8	210.6	193.3
35,0°	356.8	346.6	334.7	336.8	328.1	328.1	280.8	258.0	245.4	238.4	219.8	203.2	186.8
37,5°	357.5	341.5	333.2	324.9	314.7	314.6	279.2	255.9	235.7	231.4	214.7	193.6	178.6
40,0°	343.5	323.7	301.8	292.7	285.0	281.8	278.8	246.9	227.6	225.6	204.9	186.4	162.2
42,5°	311.3	283.7	259.6	245.5	240.5	235.1	275.8	245.2	222.6	215.5	197.8	175.8	147.6
45,0°	263.6	240.0	225.9	210.9	205.5	204.7	269.5	235.2	213.4	208.3	188.9	160.6	131.2
47,5°	233.5	212.2	205.2	196.9	185.3	190.2	264.3	230.8	205.4	199.3	173.8	140.3	115.6
50,0°	214.5	200.5	186.8	176.0	167.7	165.6	259.0	220.9	196.2	188.8	159.4	120.1	101.4
52,5°	202.4	173.0	153.3	144.0	132.9	132.1	254.9	217.3	187.5	179.0	145.3	98.1	84.8
55,0°	178.1	146.2	127.0	120.0	107.8	104.8	250.8	214.4	186.5	170.5	129.2	82.5	73.4
57,5°	142.5	118.4	102.4	94.4	89.3	85.3	251.0	212.9	185.8	169.2	115.7	71.1	65.4
60,0°	95.2	80.8	77.5	71.8	71.2	69.8	251.1	218.4	187.0	167.7	103.8	61.3	59.6
62,5°	58.0	54.8	52.2	54.7	53.3	54.6	253.1	214.1	180.6	159.5	93.9	56.2	53.4
65,0°	44.4	44.5	46.9	43.2	43.6	44.1	259.8	218.3	176.5	135.3	87.7	51.0	49.2
67,5°	38.9	35.1	35.0	34.1	33.4	32.4	277.4	228.7	169.2	111.0	72.7	44.8	40.8
70,0°	31.2	27.0	26.8	26.1	26.1	26.6	284.4	224.8	144.3	80.0	58.1	39.0	36.7
72,5°	24.4	22.5	22.5	20.4	21.1	21.5	265.5	198.7	107.9	53.5	43.1	34.7	32.8
75,0°	18.8	17.1	17.9	17.0	16.6	16.3	204.9	133.2	50.6	34.4	32.4	29.0	26.8
77,5°	14.7	13.5	12.8	12.5	12.8	12.8	119.2	54.2	11.6	23.6	21.2	18.0	18.4
80,0°	10.6	10.1	9.1	8.6	8.6	8.1	33.5	11.1	7.6	13.9	11.9	10.5	10.2
82,5°	7.3	6.2	6.1	5.6	4.9	5.4	5.5	2.7	2.8	3.8	4.3	3.5	2.3
85,0°	3.5	3.6	2.8	2.5	2.0	2.1	1.1	1.0	0.9	0.9	0.8	0.7	0.4
87,5°	0.7	0.6	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> <b>59082_111</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	0.4	0.4
2,5°	266.9	268.1	268.2	268.7	268.5	267.1	267.0	267.7	267.4	266.6	267.0	3.3	3.7
5,0°	263.6	262.9	262.0	260.1	259.5	259.0	256.6	256.8	259.2	257.8	258.3	6.5	10.1
7,5°	260.8	257.0	250.7	249.7	247.6	246.8	246.7	245.8	245.3	247.7	247.1	9.6	19.8
10,0°	252.8	249.3	247.8	246.7	248.4	244.5	243.4	240.2	241.8	240.9	240.4	12.7	32.4
12,5°	253.4	252.4	245.5	238.4	237.7	235.4	233.8	229.5	224.3	224.0	220.7	15.7	48.2
15,0°	244.8	237.8	231.9	225.9	220.6	215.3	208.8	208.3	207.9	205.7	205.7	18.5	66.7
17,5°	234.5	223.9	215.9	208.8	204.9	202.3	197.0	195.4	195.9	193.7	190.2	21.4	88.1
20,0°	225.2	218.0	205.4	199.6	193.3	189.7	186.4	179.5	178.4	175.2	173.3	24.2	112.4
22,5°	216.7	204.6	199.4	191.6	182.0	178.9	173.7	168.4	165.9	162.8	162.3	27.2	139.6
25,0°	204.9	195.2	187.0	178.8	174.1	164.7	158.3	153.2	148.3	147.1	145.5	30.2	169.8
27,5°	196.3	186.4	178.9	166.9	161.7	149.4	143.4	139.0	134.8	135.6	133.7	33.1	202.9
30,0°	190.9	177.5	163.1	156.2	146.5	137.9	134.3	127.6	124.1	121.6	122.6	35.7	238.6
32,5°	181.0	165.6	154.2	144.9	134.1	130.0	128.2	124.1	121.8	116.9	115.9	38.6	277.2
35,0°	167.7	157.4	146.1	134.8	131.4	126.8	124.8	120.5	110.3	104.9	101.4	41.3	318.5
37,5°	156.7	145.7	133.9	129.2	129.2	125.7	115.5	103.4	94.2	86.0	85.0	43.7	362.2
40,0°	146.9	134.3	126.9	126.3	125.9	115.4	98.8	88.6	77.3	72.8	71.3	45.3	407.5
42,5°	136.5	122.6	122.7	123.6	114.3	99.3	84.3	75.2	69.8	69.3	65.6	46.2	453.8
45,0°	120.9	117.7	119.9	119.0	104.2	85.2	72.0	67.4	65.3	64.5	65.6	46.5	500.3
47,5°	109.1	110.0	113.2	107.7	88.8	73.6	66.8	64.8	64.8	63.5	63.4	46.7	547.0
50,0°	97.5	101.6	105.2	92.5	74.5	65.6	61.9	61.6	59.1	61.3	61.0	46.7	593.7
52,5°	89.6	92.9	95.0	80.0	65.9	60.3	58.1	59.1	57.5	56.6	56.1	46.3	640.0
55,0°	78.3	80.4	76.2	65.5	57.9	54.0	55.5	52.2	52.9	52.4	56.0	45.7	685.7
57,5°	69.5	67.7	63.9	52.8	49.8	49.5	49.4	50.2	47.3	48.6	48.1	45.3	730.9
60,0°	61.6	59.4	53.6	47.0	46.1	44.6	45.2	44.1	43.4	43.0	43.3	44.1	775.0
62,5°	55.6	50.3	44.1	41.3	40.6	40.9	40.9	39.6	40.9	39.1	37.9	42.3	817.3
65,0°	46.5	42.0	38.0	35.8	35.8	36.1	35.5	33.9	31.7	32.0	31.7	40.2	857.5
67,5°	39.5	36.1	31.5	29.7	29.9	29.1	27.9	25.5	23.3	22.3	22.6	38.2	895.8
70,0°	34.2	29.3	27.2	25.7	24.5	22.3	19.1	14.7	12.3	10.1	9.4	34.5	930.3
72,5°	27.0	24.4	22.8	20.1	17.7	12.1	9.4	6.3	4.4	4.3	4.3	28.9	959.1
75,0°	21.4	18.1	16.5	13.1	8.9	5.4	3.9	2.7	2.0	1.9	2.4	21.1	980.3
77,5°	15.3	10.9	8.3	5.4	3.5	2.1	1.3	1.0	0.9	1.0	1.4	12.6	992.9
80,0°	7.1	3.9	2.2	1.4	0.8	0.5	0.4	0.4	0.3	0.4	0.4	5.2	998.0
82,5°	1.4	0.6	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	1.5	999.6
85,0°	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> 59082_111
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18780	151.2	156.8	154.0
95	239	252	17868	142.3	147.4	144.9
90	224	249	16927	133.3	138.2	135.8
85	209	247	15964	124.5	128.9	126.7
80	195	244	15040	116.2	120.3	118.2
75	181	242	14091	107.9	111.7	109.8
70	167	239	13125	99.8	103.2	101.5
65	154	236	12216	92.2	95.5	93.8
60	141	232	11287	84.7	87.6	86.2
55	128	229	10343	77.3	79.9	78.6
50	115	225	9380	69.9	72.1	71.0
45	103	221	8477	63.0	65.1	64.0
40	90	216	7478	55.6	57.4	56.5
35	78	211	6544	48.8	50.3	49.6
30	66	205	5594	41.9	43.2	42.6
25	55	198	4710	35.7	36.8	36.2
20	43	189	3734	29.0	29.9	29.4
15	32	178	2825	22.8	23.4	23.1
12	25	169	2241	19.0	19.5	19.2

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19410	153.0	158.7	155.8
95	239	252	18436	144.0	149.2	146.6
90	224	249	17436	134.9	139.9	137.4
85	210	247	16488	126.6	131.1	128.8
80	196	245	15518	118.3	122.5	120.4
75	182	242	14525	110.0	113.8	111.9
70	169	239	13591	102.3	105.8	104.0
65	156	236	12646	94.6	98.0	96.3
60	142	233	11609	86.4	89.4	87.9
55	130	229	10709	79.6	82.2	80.9
50	117	226	9717	72.0	74.4	73.2
45	104	221	8711	64.4	66.7	65.6
40	92	217	7766	57.6	59.4	58.5
35	80	212	6811	50.6	52.2	51.4
30	68	206	5844	43.7	45.1	44.4
25	56	199	4861	36.8	38.0	37.4
20	44	190	3868	30.0	30.9	30.4
15	33	179	2945	23.7	24.4	24.0
12	25	169	2269	19.3	19.8	19.6

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> 59082_111
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19120	152.1	157.7	154.9
95	239	252	18176	143.1	148.2	145.6
90	224	249	17202	134.1	139.0	136.6
85	210	247	16279	125.8	130.3	128.0
80	196	245	15330	117.5	121.7	119.6
75	182	242	14359	109.2	113.1	111.2
70	168	239	13372	101.0	104.5	102.8
65	155	236	12444	93.4	96.7	95.1
60	142	233	11497	85.8	88.8	87.3
55	129	229	10537	78.4	81.1	79.8
50	116	225	9558	70.9	73.3	72.1
45	104	221	8641	64.0	66.2	65.1
40	91	216	7629	56.5	58.4	57.4
35	79	211	6684	49.6	51.3	50.4
30	67	205	5725	42.8	44.2	43.5
25	55	198	4749	36.0	37.1	36.6
20	44	190	3846	29.8	30.6	30.2
15	32	178	2846	23.0	23.6	23.3
12	25	169	2258	19.1	19.7	19.4

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3C23T08NB</b> <b>EAN: 4058352727089</b>	<b>LP number</b> 59082_111
--	--	-------------------------------

**Luminousfluxs table** **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	18780.0	151.2
5.0	19410.0	153.0
15.0	19120.0	152.1