

## Photometric test report

**Family**  
**Streetlight 21 midi LED**

**Order number: 5XE3M33T08LB**  
**EAN: 4058352683156**

**LP number**  
**59152\_415**



<b>Version</b>	post-top or side-entry mounting, Smart Interface up/down
<b>Optic</b>	asymmetric, wide distribution (ST1.0a), Back Light Control (BLC)
<b>Cover</b>	toughened safety glass
<b>Lamps</b>	LED 3000 K   CRI ≥ 70
<b>Controlgear</b>	EVG-Smart Interface
<b>Rated values</b>	Net luminous flux = 12620 lm Power consumption = 98.3 W Luminous efficacy = 128.4 lm/W

**serial**  
**documentation**  
**15.07.2022**

**sitEco**

**Luminous intensity in cd/klm**


**C180-0**

**C205-25**

**C210-30**

**C270-90**

**Imax: 811 cd/klm**

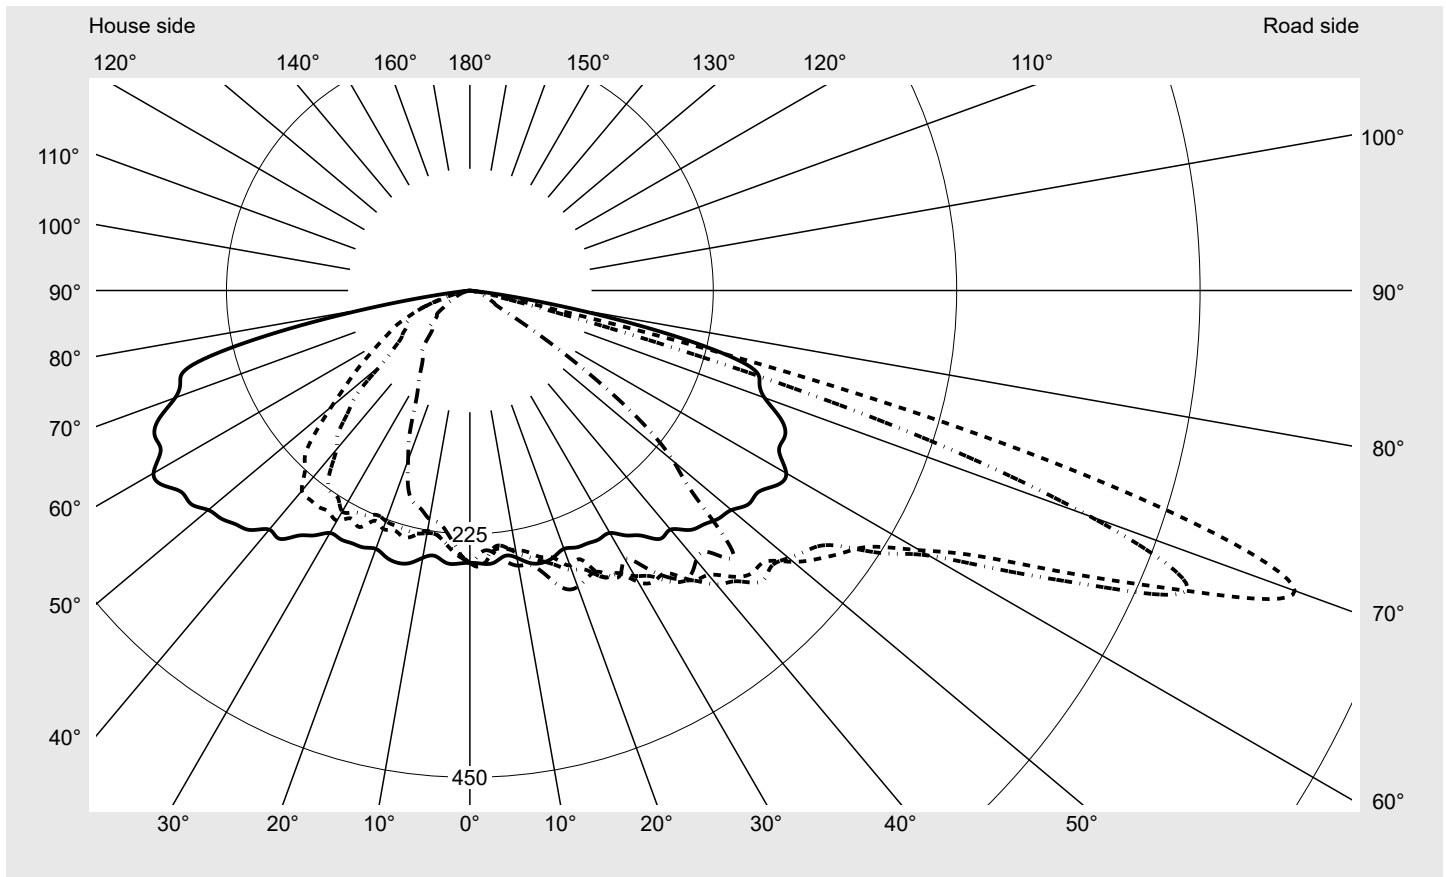

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Measurement conditions

DIN EN 13032 and DIN 5032


### Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	811.4
Imax 80°	97.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3M33T08LB</b> <b>EAN: 4058352683156</b>	<b>LP number</b> 59152_415
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**      **siteco**

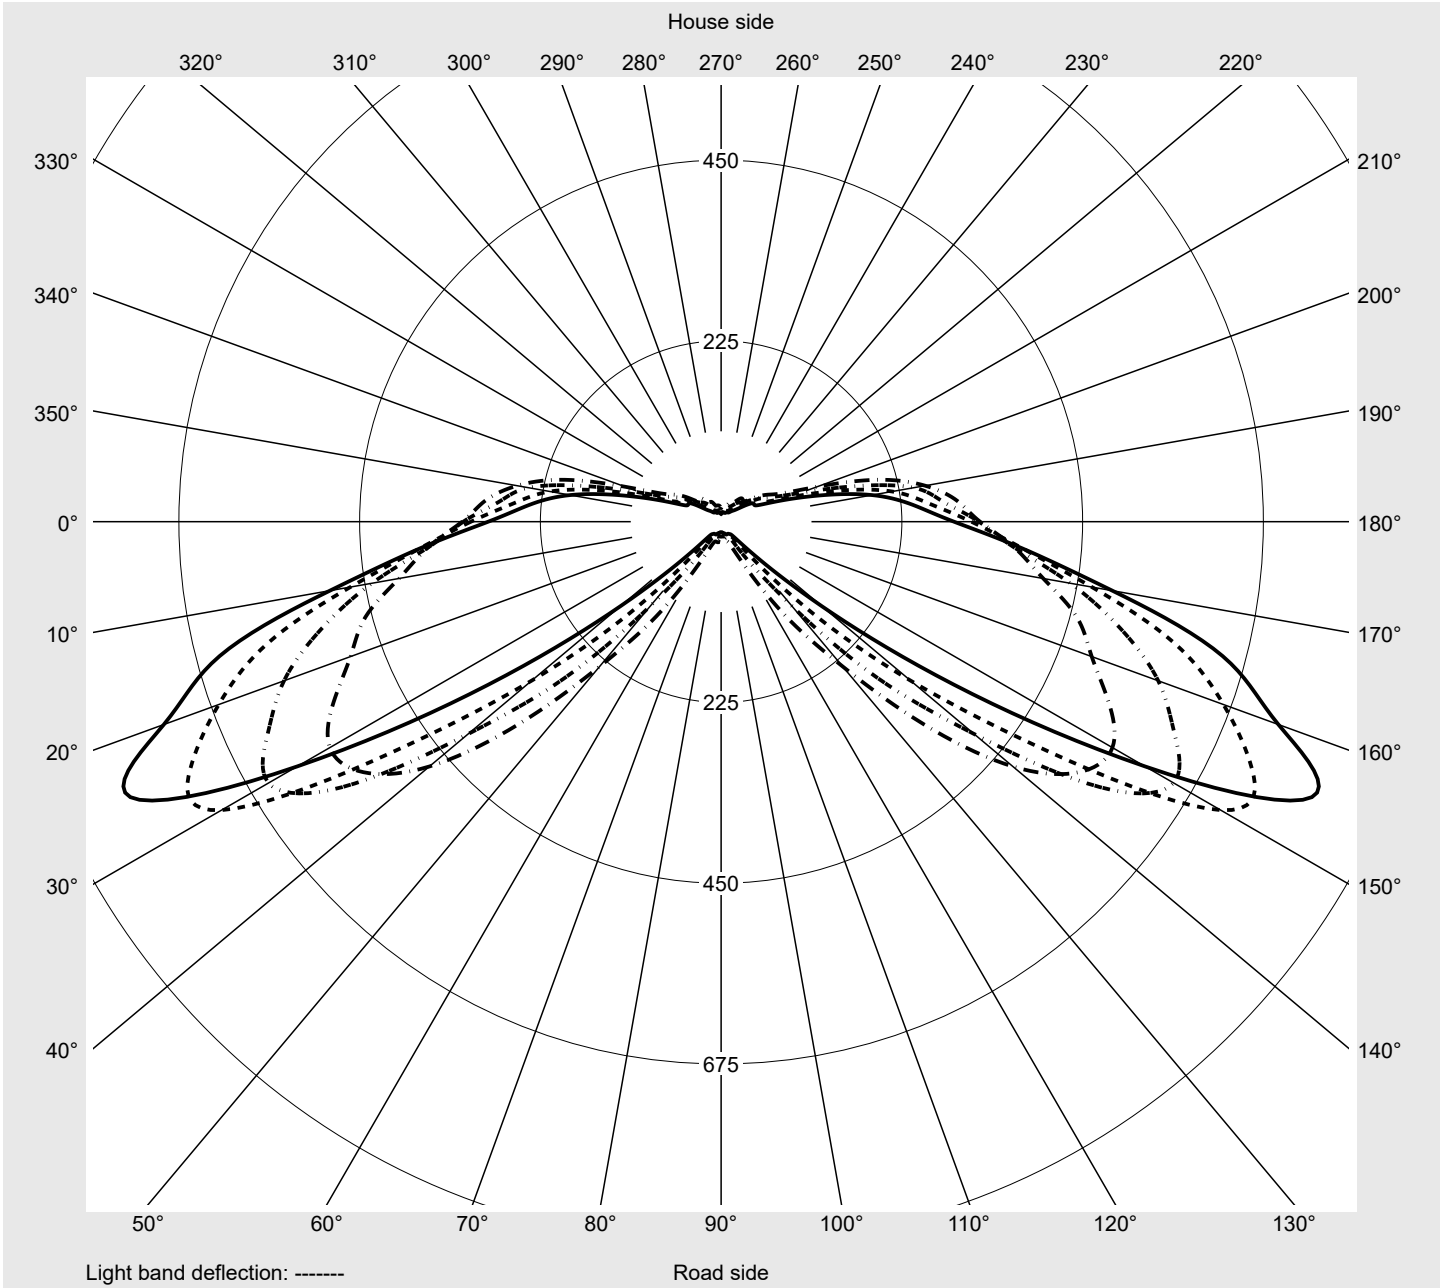

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3M33T08LB</b> <b>EAN: 4058352683156</b>	<b>LP number</b> 59152_415
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7
2,5°	252.7	252.6	255.1	255.9	254.5	255.0	254.0	252.2	251.7	247.4	245.6	244.7	243.6
5,0°	252.7	247.6	244.8	246.2	244.1	242.4	239.8	236.2	239.7	236.4	232.5	233.6	234.3
7,5°	247.5	246.2	247.0	241.4	241.5	240.8	238.5	238.2	237.0	239.8	242.0	244.4	244.4
10,0°	250.9	251.6	254.7	244.8	240.1	243.6	246.0	248.9	247.1	245.5	243.2	248.5	256.4
12,5°	258.1	251.0	248.5	247.9	244.5	247.6	252.4	251.2	250.3	256.2	259.5	260.6	263.5
15,0°	260.4	253.2	248.3	249.4	250.9	255.1	259.0	261.5	258.8	265.7	270.2	267.9	269.6
17,5°	258.3	257.3	247.8	248.7	251.9	259.5	266.5	266.0	275.2	277.4	277.3	277.8	286.1
20,0°	254.1	250.5	251.9	255.9	262.1	270.4	275.0	276.8	276.7	279.1	278.4	285.9	281.5
22,5°	257.0	252.2	255.3	268.1	272.7	269.3	279.3	285.9	287.4	287.8	284.5	282.2	286.1
25,0°	257.8	257.2	270.3	273.8	283.2	292.2	292.5	297.3	302.1	298.9	293.3	289.8	292.8
27,5°	259.1	258.9	269.3	275.9	290.3	294.3	295.3	301.0	295.9	293.4	289.9	296.4	293.1
30,0°	258.8	273.0	282.5	292.7	295.7	311.0	304.7	312.4	300.4	305.3	301.8	299.0	302.9
32,5°	268.4	281.3	284.7	297.6	311.2	318.2	313.4	319.9	315.8	313.8	308.7	313.3	302.9
35,0°	276.6	287.2	295.6	296.7	309.7	318.9	329.3	329.7	312.6	320.8	315.6	320.8	316.5
37,5°	289.2	297.8	300.2	316.3	319.7	337.4	337.7	332.8	327.5	323.7	318.9	318.2	332.2
40,0°	288.5	305.0	310.1	313.4	327.9	343.2	354.8	344.9	337.5	333.4	324.7	347.2	341.1
42,5°	300.3	309.6	317.1	332.9	343.7	358.8	364.5	353.0	347.4	337.7	344.4	349.5	356.9
45,0°	305.8	317.1	325.5	333.0	349.1	369.1	380.6	362.0	354.6	368.9	366.8	388.4	383.2
47,5°	312.0	313.3	325.1	341.9	368.3	370.8	377.7	368.2	368.3	388.5	397.5	390.1	382.7
50,0°	315.7	324.5	327.1	342.0	370.4	390.2	384.7	382.7	398.7	421.6	412.3	380.7	354.1
52,5°	324.5	324.8	337.8	340.4	373.5	407.0	394.1	398.2	435.2	435.4	412.2	358.0	310.7
55,0°	325.2	339.0	343.2	354.4	370.6	422.3	410.7	440.5	443.3	424.3	372.3	320.6	285.2
57,5°	335.5	346.3	354.6	362.1	389.2	440.8	451.8	462.3	460.2	409.5	351.4	299.4	233.2
60,0°	337.7	358.8	382.6	394.8	422.9	480.1	490.2	493.0	465.8	401.4	305.0	234.6	170.2
62,5°	322.3	366.3	407.2	458.3	491.0	532.4	562.5	543.7	474.1	356.4	235.0	151.7	80.7
65,0°	320.9	365.9	441.4	515.0	579.1	622.5	650.4	576.3	411.2	274.5	136.3	61.5	26.5
67,5°	311.5	375.7	468.6	584.1	665.5	729.3	718.0	501.2	307.7	161.4	52.8	22.8	20.7
70,0°	289.9	375.0	494.5	646.3	738.3	811.4	609.3	353.6	163.9	60.9	24.9	18.9	17.3
72,5°	280.7	388.9	529.3	634.1	740.9	675.2	389.9	143.3	60.4	27.9	16.8	16.0	15.2
75,0°	265.2	365.2	466.4	531.9	584.7	383.0	130.8	41.7	27.5	17.8	14.0	12.8	11.6
77,5°	192.5	248.8	264.2	279.3	239.7	78.3	24.8	16.9	12.2	9.5	10.3	8.9	7.8
80,0°	95.5	89.9	86.1	97.1	65.8	14.7	10.3	5.9	5.3	5.7	6.8	5.1	5.0
82,5°	25.0	19.4	13.4	7.5	11.9	4.8	3.8	3.1	3.0	2.4	2.7	2.7	2.2
85,0°	1.0	1.6	1.6	1.3	1.4	1.6	1.4	1.2	1.4	0.9	1.2	0.9	1.0
87,5°	0.4	0.4	0.4	0.5	0.5	0.5	0.3	0.6	0.5	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3M33T08LB</b> <b>EAN: 4058352683156</b>	<b>LP number</b> <b>59152_415</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7
2,5°	243.6	243.2	243.3	241.2	240.5	242.2	250.2	248.9	247.1	245.4	245.5	243.3	240.0
5,0°	234.1	234.7	239.6	243.4	242.3	242.8	249.9	251.9	245.5	241.3	236.8	236.2	233.4
7,5°	243.7	243.8	244.1	247.6	248.9	252.1	248.0	241.8	234.4	231.7	228.2	228.4	225.5
10,0°	257.2	254.6	250.4	251.4	252.5	258.3	242.9	242.6	235.3	228.9	225.6	227.8	225.5
12,5°	261.6	262.7	263.6	260.7	258.4	260.1	257.9	249.1	241.8	233.6	231.4	229.9	224.5
15,0°	273.9	274.4	275.1	277.9	277.1	272.5	263.7	252.8	241.7	241.0	236.1	228.8	219.4
17,5°	276.7	270.5	275.6	275.9	279.5	288.6	260.3	251.3	244.9	237.3	232.4	228.0	216.6
20,0°	285.2	286.3	287.4	283.7	284.5	291.4	254.3	265.1	245.3	240.9	234.4	226.8	227.8
22,5°	290.7	287.8	282.6	280.9	284.6	286.4	258.8	258.1	247.1	240.8	230.3	224.6	223.8
25,0°	290.9	287.2	284.9	293.2	285.2	287.3	253.7	262.3	252.9	244.0	241.3	229.1	223.8
27,5°	289.3	299.7	289.5	293.7	287.8	298.4	247.8	259.9	263.0	254.6	237.6	231.2	222.7
30,0°	304.3	292.9	297.5	300.8	300.7	286.7	261.7	260.3	261.4	242.3	245.5	235.9	219.5
32,5°	305.9	308.9	297.2	312.5	307.7	304.5	270.7	266.6	261.3	257.8	242.7	227.1	210.7
35,0°	312.3	315.7	323.4	321.9	326.7	324.5	274.1	271.0	269.6	262.0	244.2	226.0	186.2
37,5°	342.6	338.0	331.5	344.3	331.4	333.1	273.8	276.4	276.8	258.8	243.4	213.1	165.6
40,0°	350.0	346.7	344.9	344.4	337.9	325.4	288.1	279.6	275.1	264.7	241.7	191.8	147.8
42,5°	364.9	348.0	345.2	345.9	342.0	328.4	291.2	281.7	286.2	261.6	225.5	181.1	134.3
45,0°	364.0	353.2	344.2	344.8	339.4	344.7	297.8	279.5	275.9	253.2	215.4	159.3	121.5
47,5°	357.3	337.5	304.9	296.2	280.5	284.0	305.0	284.6	285.2	249.7	192.9	141.3	109.9
50,0°	314.0	275.9	263.2	255.3	247.2	245.9	311.3	293.6	273.0	229.3	166.9	107.3	88.1
52,5°	278.1	253.7	229.4	220.1	205.6	201.2	315.6	297.5	264.7	208.9	144.9	89.3	79.1
55,0°	239.5	201.5	165.8	154.9	144.9	137.0	312.2	294.2	259.8	194.6	127.1	78.0	74.1
57,5°	183.6	138.9	110.6	88.6	79.1	74.1	313.5	287.5	236.2	170.2	109.8	73.2	66.2
60,0°	111.5	71.4	46.5	37.5	35.2	32.8	311.2	271.5	216.0	147.6	95.5	67.8	62.2
62,5°	42.8	28.4	25.5	26.0	25.5	25.7	295.3	257.9	201.5	127.0	83.6	67.2	53.8
65,0°	23.4	23.1	22.8	23.5	21.6	21.4	278.4	243.5	170.0	104.7	73.6	60.2	48.1
67,5°	20.9	19.5	18.9	18.8	18.6	18.7	259.7	216.3	148.1	85.9	59.1	57.9	41.2
70,0°	17.3	16.9	14.9	14.9	13.3	13.2	239.7	190.8	125.8	74.2	47.9	45.9	33.0
72,5°	14.5	13.7	11.8	11.8	9.4	10.7	215.6	168.6	110.3	54.9	29.2	33.4	25.5
75,0°	10.2	9.6	8.6	7.6	7.1	8.2	187.2	114.4	77.4	24.7	20.0	22.7	19.4
77,5°	6.8	6.5	5.6	5.4	5.0	4.8	100.2	23.1	17.9	7.8	11.3	11.5	11.8
80,0°	3.9	4.2	3.1	3.3	3.8	3.3	40.0	7.2	6.0	5.2	7.0	6.8	6.4
82,5°	2.1	2.1	1.7	2.3	1.9	1.6	10.0	3.5	3.0	2.4	3.3	3.1	2.9
85,0°	0.8	1.0	0.6	0.7	0.6	0.6	1.5	1.2	1.1	1.1	1.1	1.3	1.1
87,5°	0.4	0.2	0.2	0.2	0.2	0.4	0.3	0.3	0.2	0.4	0.3	0.2	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3M33T08LB</b> <b>EAN: 4058352683156</b>	<b>LP number</b> <b>59152_415</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	0.4	0.4
2,5°	240.3	241.6	238.8	237.8	237.5	239.7	242.6	244.7	244.9	242.1	241.0	2.9	3.3
5,0°	228.5	228.0	227.0	225.7	228.3	227.7	229.0	226.6	226.4	225.7	226.7	5.7	9.0
7,5°	228.3	226.6	219.5	221.8	216.9	216.1	216.6	215.9	217.8	218.5	216.7	8.4	17.4
10,0°	218.6	215.1	214.8	214.4	213.9	212.4	209.8	207.9	207.4	213.1	214.6	11.2	28.6
12,5°	222.9	224.9	218.4	214.2	208.1	211.3	215.6	212.9	208.3	206.4	207.2	14.2	42.8
15,0°	213.8	216.2	213.4	214.0	210.7	206.1	202.7	200.1	201.7	201.8	202.6	17.2	60.1
17,5°	213.2	212.5	216.4	210.3	205.3	203.3	199.8	189.2	192.6	193.9	189.9	20.1	80.2
20,0°	221.3	208.9	205.5	200.6	189.2	182.7	179.3	173.8	164.6	163.6	167.0	22.8	102.9
22,5°	220.7	214.8	198.3	184.9	172.2	159.3	158.7	146.8	146.8	144.1	146.6	25.2	128.1
25,0°	217.0	197.4	182.7	161.6	153.9	143.9	140.8	132.9	136.9	126.6	121.7	27.8	155.9
27,5°	207.1	180.6	159.0	145.7	138.5	128.8	124.3	119.3	110.8	107.1	104.5	29.9	185.9
30,0°	187.4	164.9	146.0	133.8	122.6	115.2	100.8	101.8	98.2	93.7	93.5	32.4	218.3
32,5°	173.5	148.1	134.8	114.4	104.9	102.5	95.5	91.7	86.3	82.3	83.0	35.0	253.3
35,0°	154.6	136.4	115.1	101.4	100.1	95.8	89.4	82.3	80.9	75.6	76.0	37.5	290.8
37,5°	136.6	117.1	104.1	96.7	95.3	87.5	84.6	81.1	77.0	76.2	72.8	40.4	331.2
40,0°	121.4	107.1	99.6	91.1	89.3	82.0	77.5	73.8	68.3	66.8	65.6	42.9	374.0
42,5°	113.6	96.2	91.9	86.0	85.0	79.7	71.7	68.0	59.4	56.2	53.6	45.4	419.4
45,0°	100.6	90.9	85.7	81.0	74.3	66.6	57.9	54.8	51.6	51.5	49.7	47.7	467.1
47,5°	93.6	83.1	73.5	70.4	63.4	53.5	51.8	47.0	51.1	49.2	51.2	48.6	515.7
50,0°	84.1	73.4	60.5	61.0	52.7	47.5	47.1	44.9	45.0	43.7	42.9	48.6	564.3
52,5°	75.3	64.9	55.6	50.1	46.6	40.8	42.4	40.3	40.5	36.3	38.4	48.6	613.0
55,0°	64.4	54.4	47.2	42.8	42.1	38.4	38.0	35.6	33.6	34.1	36.2	47.5	660.5
57,5°	53.1	46.8	44.4	39.8	37.9	35.5	33.5	33.2	32.2	31.5	28.2	46.2	706.7
60,0°	44.6	40.4	41.3	35.5	32.0	30.9	30.1	30.0	29.4	28.7	24.4	44.7	751.4
62,5°	40.0	38.3	37.9	30.7	28.1	26.9	22.0	20.8	20.6	19.4	17.2	44.1	795.5
65,0°	37.9	33.8	30.2	24.9	21.3	19.0	18.2	16.5	16.8	16.2	14.2	43.7	839.1
67,5°	30.5	27.2	21.8	17.6	15.1	15.1	14.7	14.6	14.7	13.4	12.3	42.8	881.9
70,0°	22.9	18.7	15.1	14.0	13.3	12.0	11.9	12.1	11.4	11.7	9.5	40.0	921.9
72,5°	18.9	15.1	13.3	11.8	10.6	9.5	8.2	7.9	7.5	7.0	7.5	34.4	956.3
75,0°	14.0	11.5	8.9	9.5	7.5	5.9	4.0	4.3	4.2	3.7	3.9	25.3	981.7
77,5°	10.3	7.2	5.6	5.4	3.9	2.9	2.4	2.5	1.9	2.4	2.1	12.3	994.0
80,0°	6.0	3.9	3.0	2.5	1.9	1.4	1.2	0.9	1.0	0.9	1.0	4.6	998.6
82,5°	2.5	1.9	0.8	0.6	0.7	0.4	0.3	0.2	0.3	0.4	0.4	1.1	999.7
85,0°	0.9	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.2	999.9
87,5°	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3M33T08LB</b> <b>EAN: 4058352683156</b>	<b>LP number</b> 59152_415
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12620	98.3	100.9	99.6
95	239	252	11996	92.3	94.7	93.5
90	224	249	11360	86.5	88.7	87.6
85	209	247	10705	80.5	82.6	81.6
80	195	244	10079	75.1	77.0	76.0
75	181	242	9445	69.6	71.4	70.5
70	168	239	8845	64.6	66.3	65.4
65	154	236	8187	59.3	60.8	60.0
60	141	232	7563	54.4	55.7	55.0
55	128	229	6928	49.4	50.7	50.0
50	116	225	6333	45.0	46.1	45.6
45	103	221	5676	40.2	41.1	40.7
40	91	216	5059	35.8	36.6	36.2
35	79	211	4433	31.3	32.1	31.7
30	67	205	3796	26.9	27.5	27.2
25	55	198	3150	22.5	23.1	22.8
20	44	190	2548	18.6	19.0	18.8
15	32	178	1884	14.2	14.5	14.4
14	29	175	1716	13.1	13.4	13.2

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12980	99.5	102.1	100.8
95	239	252	12321	93.4	95.8	94.6
90	225	250	11698	87.9	90.2	89.1
85	210	247	11014	81.9	84.1	83.0
80	196	245	10363	76.5	78.4	77.4
75	183	242	9751	71.3	73.2	72.2
70	169	239	9082	65.9	67.6	66.8
65	156	236	8449	60.9	62.4	61.6
60	143	233	7809	55.8	57.3	56.6
55	130	229	7157	50.9	52.2	51.6
50	117	226	6494	46.0	47.1	46.6
45	104	221	5821	41.1	42.1	41.6
40	92	217	5191	36.6	37.5	37.0
35	80	212	4552	32.1	32.9	32.5
30	68	206	3905	27.6	28.3	28.0
25	56	199	3248	23.2	23.7	23.4
20	44	190	2580	18.9	19.3	19.1
15	33	179	1963	14.8	15.2	15.0
13	29	175	1736	13.3	13.6	13.4

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3M33T08LB</b> <b>EAN: 4058352683156</b>	<b>LP number</b> 59152_415
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12820	98.8	101.5	100.2
95	239	252	12177	92.9	95.2	94.1
90	224	249	11524	87.0	89.2	88.1
85	210	247	10898	81.4	83.5	82.4
80	196	245	10259	76.0	77.9	77.0
75	182	242	9611	70.4	72.3	71.4
70	168	239	8952	65.0	66.7	65.8
65	155	236	8329	60.0	61.6	60.8
60	142	233	7696	55.0	56.5	55.8
55	129	229	7052	50.2	51.4	50.8
50	116	225	6396	45.3	46.4	45.8
45	104	221	5781	40.8	41.8	41.3
40	91	216	5105	36.0	36.8	36.4
35	79	211	4471	31.5	32.3	31.9
30	67	205	3828	27.1	27.7	27.4
25	56	199	3230	23.0	23.5	23.2
20	44	190	2568	18.7	19.1	18.9
15	32	178	1897	14.3	14.6	14.4
13	29	175	1728	13.2	13.5	13.4

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3M33T08LB</b> <b>EAN: 4058352683156</b>	<b>LP number</b> <b>59152_415</b>
--	--	--------------------------------------

<b>Luminousfluxs table</b>	<b>siteco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	12620.0	98.3
5.0	12980.0	99.5
15.0	12820.0	98.8