




Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7781F6B1A EAN: 4058352853214	LP number 59238_97
	Version mounting bracket Optic symmetric distribution RS12 Cover toughened safety glass Lamps LED 5700 K CRI ≥ 90 Controlgear ECG SITECO iQ Rated values Net luminous flux = 28520 lm Power consumption = 270.2 W Luminous efficacy = 105.6 lm/W	serial documentation 22.08.2023





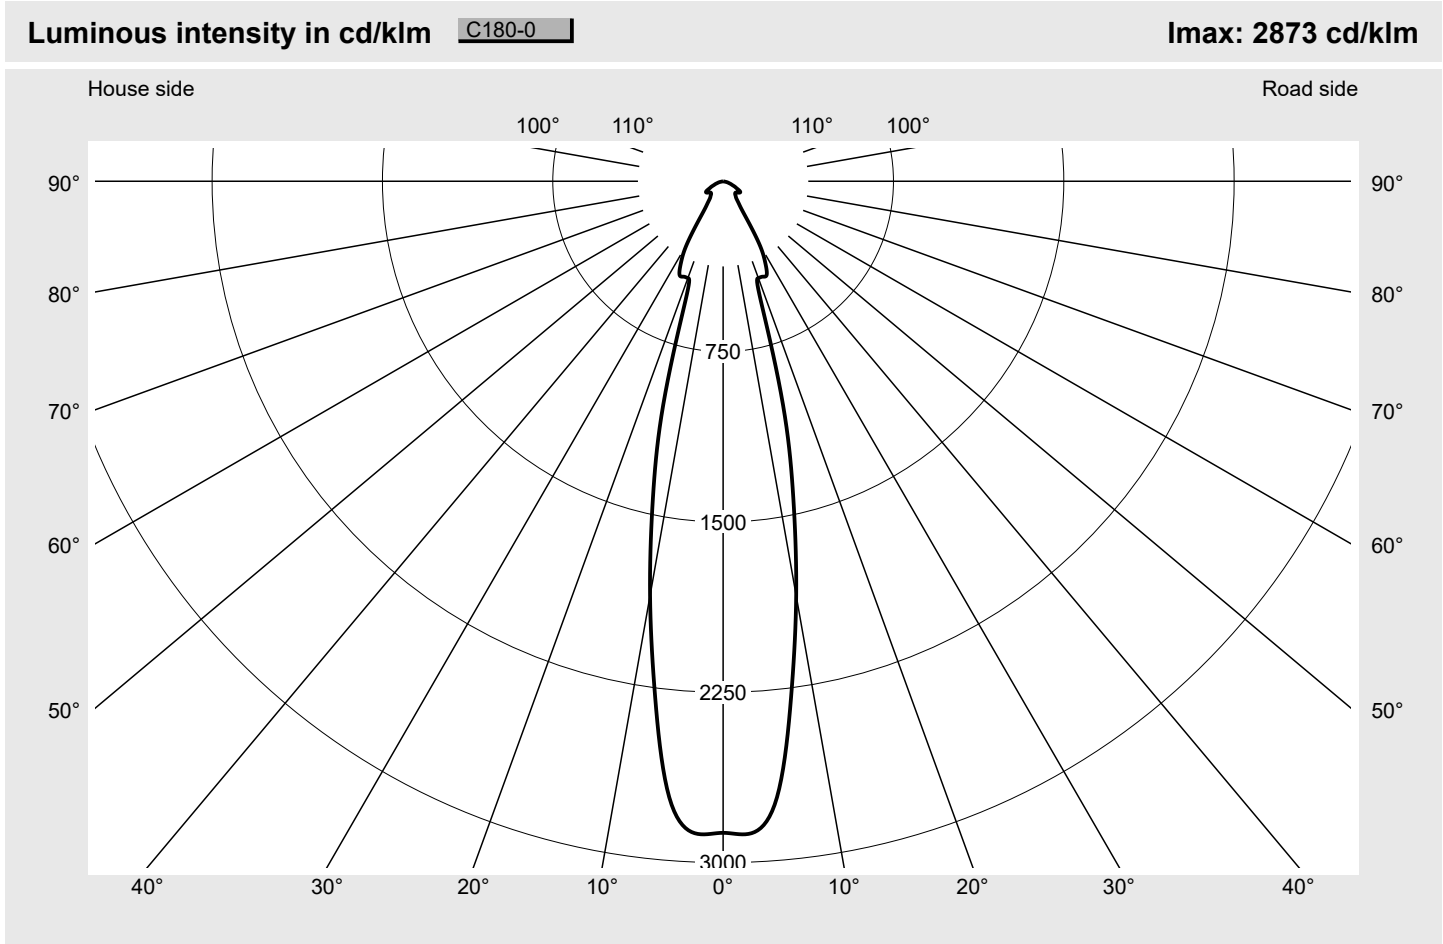


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7781F6B1A EAN: 4058352853214	LP number 59238_97
---------------------------------------	--	------------------------------

Envelope curve in cd/klm KMK 2.5° KMK 0° siteco

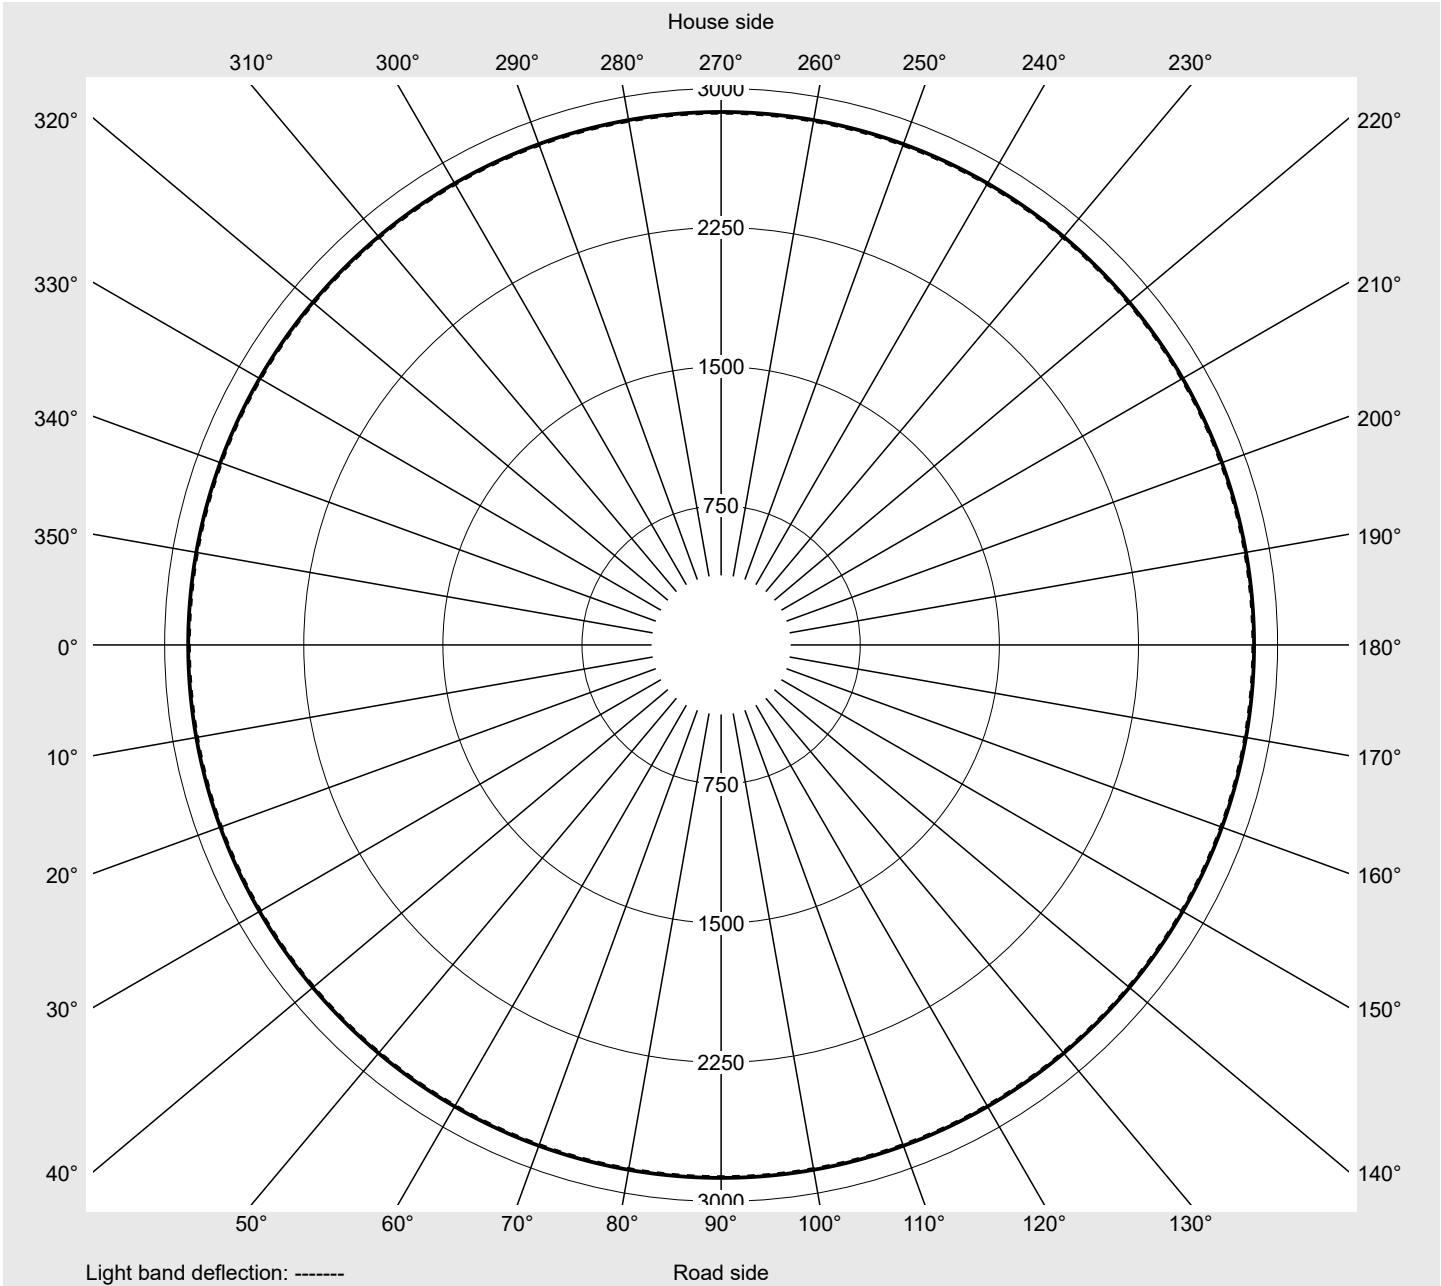

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7781F6B1A EAN: 4058352853214	LP number 59238_97
---------------------------------------	--	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7781F6B1A EAN: 4058352853214	LP number 59238_97
---------------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	28520	270.2	286.6	278.4
95	241	252	27060	251.6	266.7	259.2
90	229	250	25713	235.2	249.2	242.2
85	216	248	24253	218.2	231.0	224.6
80	203	246	22794	201.9	213.7	207.8
75	190	243	21334	186.2	197.0	191.6
70	178	241	19986	172.3	182.2	177.2
65	165	238	18527	157.6	166.7	162.1
60	152	235	17067	143.5	151.6	147.6
55	140	232	15720	130.8	138.3	134.6
50	127	229	14260	117.4	124.0	120.7
45	114	225	12800	104.1	110.3	107.2
40	102	221	11453	92.4	97.5	95.0
35	89	216	9993	79.9	84.3	82.1
30	76	210	8534	67.8	71.5	69.6
25	63	203	7074	56.2	59.2	57.7
20	51	195	5726	45.7	48.1	46.9
15	38	184	4267	34.7	36.5	35.6
12	31	177	3481	28.8	30.2	29.5