


# Photometric test report

<b>Family</b> <b>Floodlight FL21 midi</b>	<b>Order number: 5XA7782E1C1A</b> <b>EAN: 4058352853313</b>	<b>LP number</b> <b>58550_144</b>
	<b>Version</b> mounting bracket <b>Optic</b> asymmetric distribution PL61 <b>Cover</b> toughened safety glass <b>Lamps</b> LED 2200 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 21820 lm Power consumption = 208.1 W Luminous efficacy = 104.8 lm/W	<b>serial documentation</b> <b>22.08.2023</b>





**Luminous intensity in cd/klm** C180-0 C190-10 C195-15 C270-90 **Imax: 745 cd/klm**

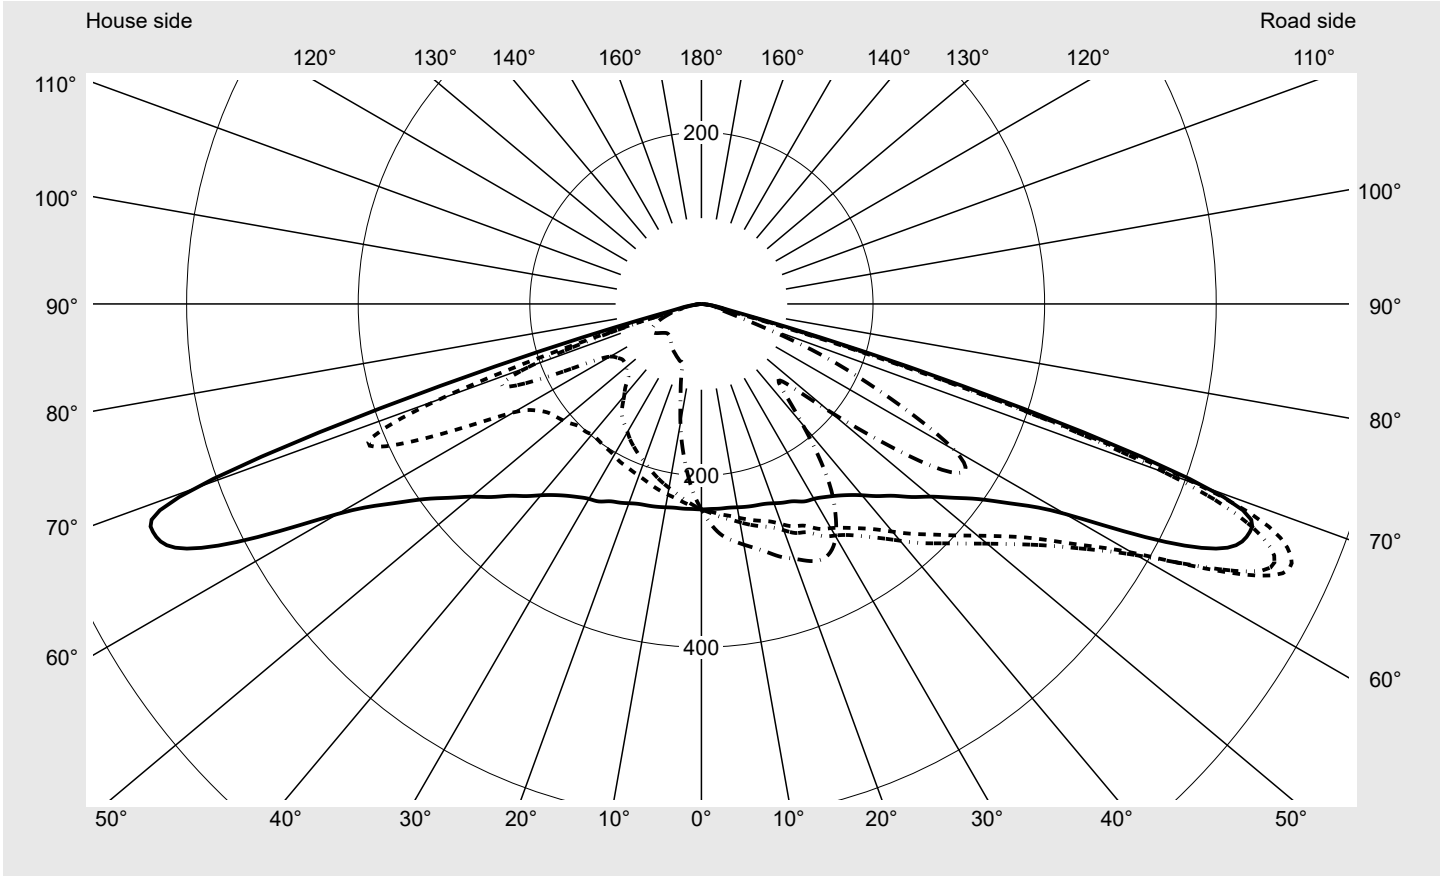


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	640.5
Imax 80°	24.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1C1A</b> <b>EAN: 4058352853313</b>	<b>LP number</b> 58550_144
---------------------------------------	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 65°**    **KMK 62,5°**    **KMK 60°**    **KMK 57,5°**      **siteco**

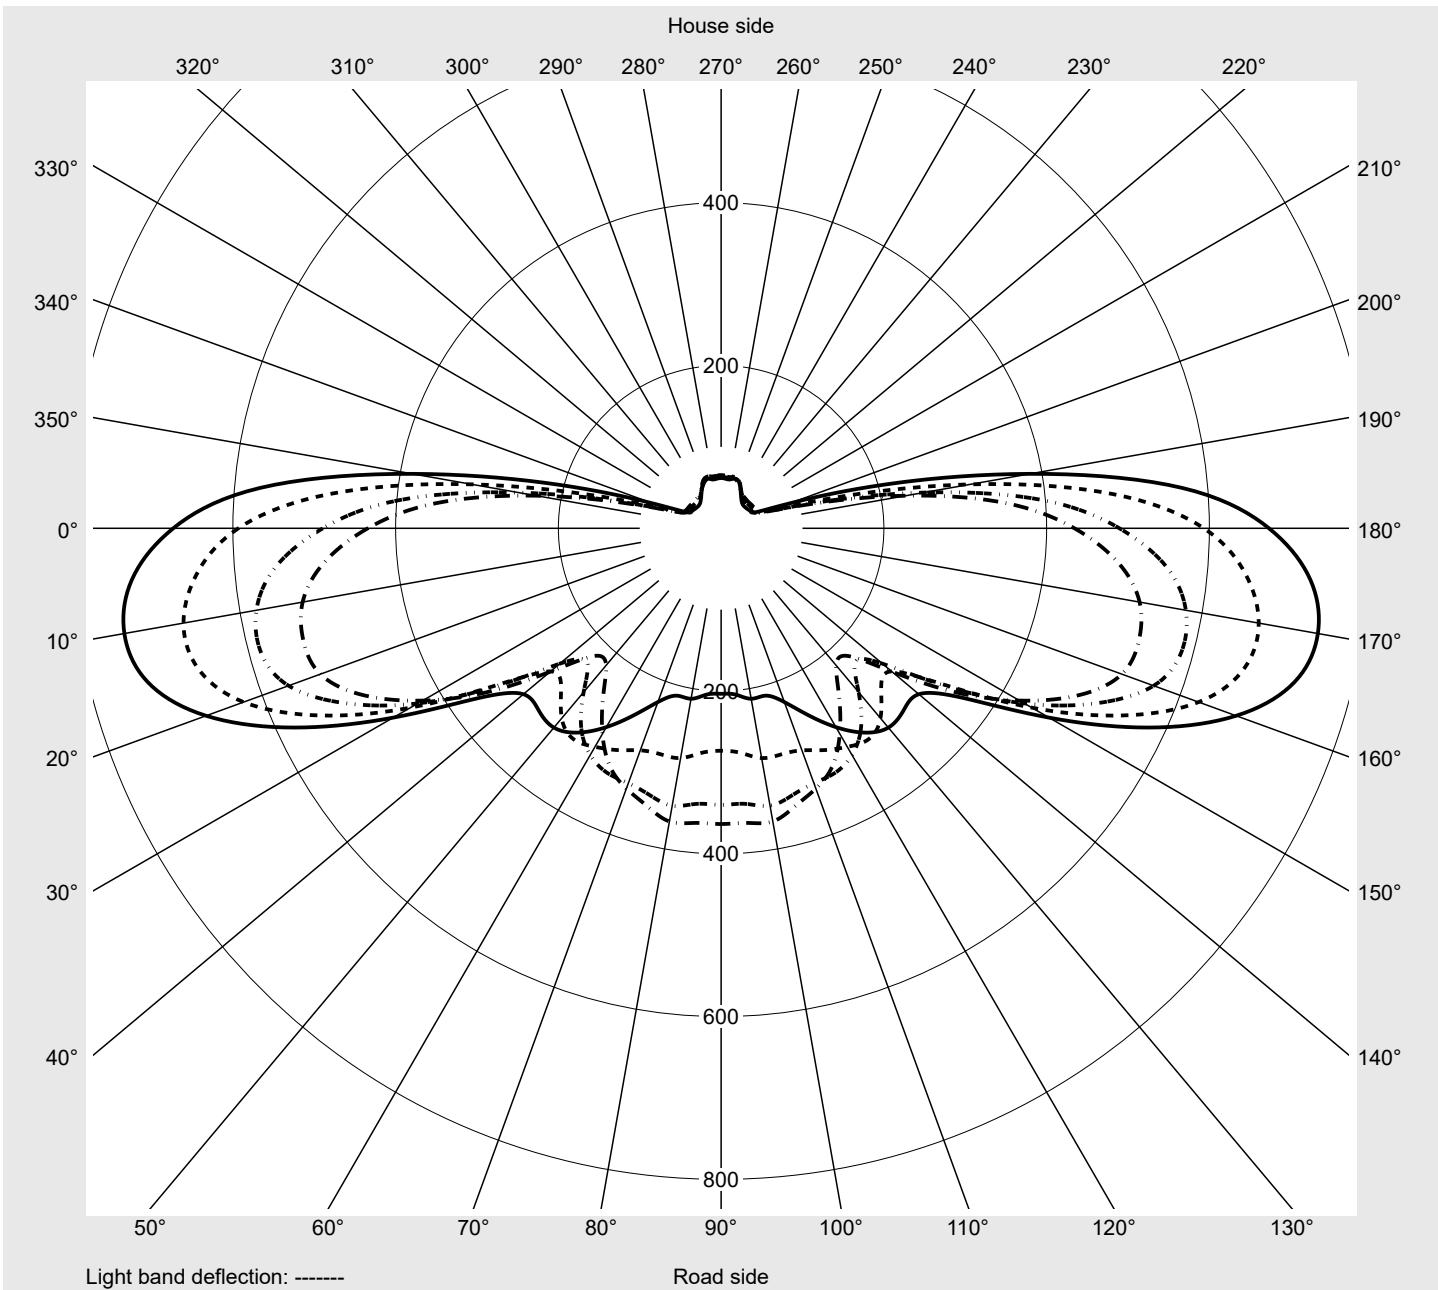

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1C1A</b> <b>EAN: 4058352853313</b>	<b>LP number</b> 58550_144
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	239.2	240.6	242.2	243.7	245.4	247.0	248.5	249.7	250.8	251.8	252.8	253.7	254.4
5,0°	239.5	242.7	245.9	249.0	251.9	254.7	257.2	259.4	261.3	263.0	264.5	265.8	266.9
7,5°	239.6	244.5	249.0	253.2	257.1	260.7	264.0	266.7	269.0	270.9	272.5	273.9	275.0
10,0°	240.7	247.3	253.2	258.3	262.9	266.8	270.2	272.8	274.8	276.2	277.6	279.1	280.5
12,5°	242.1	250.3	257.5	263.6	268.7	272.8	276.1	278.5	280.3	281.7	282.9	284.2	285.5
15,0°	243.2	253.2	261.6	268.3	273.6	277.7	281.0	283.8	286.1	287.9	289.3	290.5	291.6
17,5°	244.4	256.2	265.8	273.1	278.6	282.6	286.0	288.9	291.7	294.1	296.3	298.1	299.7
20,0°	247.2	262.0	273.1	280.6	285.3	288.9	292.0	294.9	297.5	300.4	303.7	306.4	308.1
22,5°	250.6	267.7	280.5	289.0	293.0	295.6	299.1	302.4	305.2	308.2	312.1	315.5	317.9
25,0°	253.7	271.8	285.2	293.6	298.4	302.0	305.7	309.5	313.2	316.6	319.7	323.6	326.3
27,5°	259.5	280.4	295.5	304.9	310.5	314.1	316.1	318.8	322.5	326.2	329.4	331.8	333.4
30,0°	262.3	285.3	301.7	311.7	318.2	323.2	326.6	328.9	330.9	334.2	335.4	334.9	332.8
32,5°	266.9	291.7	309.3	319.4	325.5	330.3	334.7	338.2	339.3	338.9	336.5	331.7	325.8
35,0°	273.0	300.4	319.1	330.7	337.7	342.5	346.3	348.7	347.4	340.9	331.9	324.2	315.2
37,5°	280.8	310.7	331.0	344.1	352.2	356.8	359.5	358.9	351.7	339.1	323.9	313.3	300.6
40,0°	291.0	324.4	346.4	360.2	368.8	374.4	376.5	369.9	354.1	333.7	312.4	293.8	275.9
42,5°	303.8	340.0	363.4	378.0	386.3	391.3	391.2	378.8	354.2	323.4	294.1	267.2	243.1
45,0°	316.2	356.0	380.1	394.5	403.2	407.8	401.4	380.8	347.9	309.8	273.1	238.7	207.4
47,5°	333.1	374.5	399.2	413.4	421.6	424.7	412.0	378.8	338.2	294.3	248.5	208.9	176.1
50,0°	349.4	394.1	420.1	434.7	442.0	440.1	418.4	377.5	326.4	275.1	222.7	184.4	169.2
52,5°	371.1	416.7	444.9	459.9	464.5	452.4	419.9	370.6	310.9	252.5	204.0	186.7	195.6
55,0°	396.9	446.5	476.8	490.8	491.6	467.2	422.8	361.7	293.9	233.1	204.4	210.0	235.1
57,5°	434.2	490.3	522.2	531.6	524.1	485.2	423.4	351.0	274.1	222.1	219.9	252.9	291.6
60,0°	489.5	549.8	579.9	585.8	565.7	508.8	430.4	338.9	258.8	233.1	262.9	299.7	321.7
62,5°	593.3	647.0	670.9	665.5	624.4	544.2	440.8	335.5	273.5	278.1	304.7	316.3	310.1
65,0°	673.3	726.9	744.7	729.6	673.5	579.4	465.3	363.6	317.2	316.8	319.7	306.5	282.1
67,5°	692.3	734.5	738.2	706.3	642.7	556.8	463.7	382.3	347.7	336.9	316.9	279.9	236.1
70,0°	629.0	640.5	619.1	578.0	519.0	457.0	394.4	353.3	340.5	324.9	286.4	233.9	198.5
72,5°	327.9	325.8	291.9	301.0	323.1	314.1	287.3	268.5	257.1	233.5	204.7	182.0	158.1
75,0°	97.0	63.1	54.8	75.1	154.3	189.6	178.5	152.6	113.5	87.4	107.1	102.2	86.8
77,5°	32.8	28.1	25.1	25.4	52.2	80.6	76.8	38.5	23.7	25.5	35.7	35.5	32.3
80,0°	20.7	17.4	17.1	16.6	19.5	24.8	19.4	13.3	12.8	13.0	14.2	16.7	16.3
82,5°	10.1	9.1	9.8	10.2	9.5	9.2	8.9	7.5	7.6	7.7	7.4	8.2	8.6
85,0°	3.6	3.2	3.4	3.4	3.3	3.4	3.4	3.4	3.4	3.4	3.2	3.2	3.1
87,5°	1.2	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.8	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1C1A</b> <b>EAN: 4058352853313</b>	<b>LP number</b> <b>58550_144</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	255.0	255.6	256.1	256.5	256.9	257.0	237.6	236.0	234.3	232.7	231.2	229.8	228.5
5,0°	267.7	268.3	269.0	269.7	270.2	270.3	236.0	232.3	228.7	225.1	221.6	218.2	215.0
7,5°	275.7	276.2	276.8	277.5	278.0	278.2	234.1	228.5	222.8	217.2	211.7	206.5	201.3
10,0°	281.4	282.1	282.9	283.9	284.6	284.9	233.4	225.6	217.7	209.9	202.2	194.8	187.6
12,5°	286.9	288.2	289.4	290.5	291.4	291.7	232.7	222.8	212.6	202.7	192.8	183.2	173.6
15,0°	293.1	295.1	297.1	298.7	299.6	299.8	231.8	219.5	207.0	194.8	182.8	171.1	159.1
17,5°	301.1	303.2	305.8	307.7	308.7	309.1	230.8	216.0	201.1	186.5	171.9	157.5	143.0
20,0°	309.2	310.8	313.6	315.4	316.0	316.0	230.5	213.1	195.5	178.2	160.7	143.4	127.2
22,5°	318.3	319.3	321.7	324.1	324.3	324.1	231.1	210.8	190.3	170.2	149.8	130.0	112.4
25,0°	327.4	327.5	328.5	330.3	329.8	329.1	232.1	208.5	184.8	161.1	138.0	116.2	95.6
27,5°	332.5	329.9	328.9	329.9	328.0	325.9	234.0	206.8	179.1	151.6	124.4	97.9	81.4
30,0°	329.4	323.9	321.5	321.3	317.4	313.1	234.1	203.6	172.4	141.4	106.9	82.4	76.2
32,5°	319.2	312.0	307.3	304.1	295.6	290.9	235.8	201.7	166.6	129.7	91.2	75.8	73.5
35,0°	305.5	295.3	287.6	278.7	266.3	263.1	238.3	200.3	161.0	115.5	79.9	72.0	70.9
37,5°	285.5	270.6	258.3	240.6	226.8	225.0	242.2	198.9	151.7	100.3	73.3	69.3	68.5
40,0°	255.6	237.1	219.7	195.2	185.0	183.7	248.0	198.8	140.1	85.3	68.2	66.5	65.9
42,5°	218.8	194.2	173.9	156.4	149.0	148.0	254.8	201.0	131.0	77.5	64.8	63.6	63.2
45,0°	181.0	156.7	141.7	130.5	126.7	127.1	263.3	201.7	120.4	71.4	61.7	60.7	60.4
47,5°	157.5	145.8	141.0	141.9	141.4	144.0	275.1	206.3	118.8	68.7	59.2	58.2	57.8
50,0°	172.0	175.4	180.4	188.9	191.2	194.6	287.2	210.9	113.6	65.4	56.6	55.6	55.1
52,5°	211.8	224.2	237.9	253.7	258.4	261.7	302.8	214.9	112.5	63.4	54.2	53.1	52.5
55,0°	265.3	288.2	308.0	327.0	329.2	331.6	321.4	220.0	112.7	61.3	51.8	50.5	50.0
57,5°	323.1	340.4	353.1	365.8	363.4	363.4	352.4	230.7	116.6	60.1	49.3	48.0	47.5
60,0°	331.5	333.4	339.3	346.1	339.9	339.9	397.0	252.7	122.8	59.8	46.9	45.5	45.0
62,5°	300.7	290.4	287.4	286.7	277.0	273.4	483.0	311.0	147.5	64.8	45.3	43.3	42.6
65,0°	253.4	227.2	212.9	212.7	205.1	203.4	568.9	385.2	207.0	89.5	46.7	41.7	40.4
67,5°	201.9	183.2	157.4	145.0	134.7	137.1	586.1	419.8	251.0	133.6	58.6	42.4	37.8
70,0°	179.3	159.0	76.7	59.5	55.4	61.0	469.1	325.6	213.5	120.4	59.8	44.4	36.6
72,5°	141.1	117.8	36.2	28.5	28.5	27.5	196.0	136.9	113.2	71.9	45.2	39.0	32.2
75,0°	76.2	62.7	25.0	21.1	20.9	19.7	57.7	36.1	37.9	34.6	27.7	25.8	23.8
77,5°	31.6	29.8	17.0	14.9	14.6	13.4	26.4	22.7	22.4	20.9	18.3	17.0	16.6
80,0°	14.2	13.2	10.0	9.3	8.7	8.1	18.9	15.6	13.6	13.0	11.9	11.2	11.1
82,5°	7.0	6.3	5.3	4.8	4.3	4.0	10.3	8.8	7.5	7.3	8.1	6.8	6.7
85,0°	2.6	2.3	1.9	1.7	1.7	1.6	3.8	3.4	3.2	3.3	3.7	3.4	3.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.3	1.3	1.3	1.4	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1C1A</b> <b>EAN: 4058352853313</b>	<b>LP number</b> 58550_144
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	0.4	0.4
2,5°	227.2	225.9	224.6	223.6	222.7	221.9	221.2	220.5	220.1	219.9	219.9	2.9	3.2
5,0°	212.0	209.0	206.3	203.8	201.6	199.6	197.9	196.6	195.6	195.2	195.0	5.6	8.9
7,5°	196.3	191.7	187.4	183.4	179.7	176.5	173.7	171.6	170.0	169.2	168.9	8.3	17.1
10,0°	180.5	173.8	167.5	161.7	156.3	151.7	147.7	144.7	142.5	141.3	140.9	10.7	27.9
12,5°	164.1	154.9	146.3	138.5	131.5	125.6	120.8	117.2	114.6	113.1	112.6	13.1	40.9
15,0°	147.0	135.8	125.6	116.9	109.5	103.6	99.0	95.9	93.7	92.4	91.9	15.3	56.2
17,5°	129.3	117.1	105.9	95.3	87.4	82.1	78.6	76.3	75.0	74.1	73.9	17.4	73.6
20,0°	113.2	98.1	85.6	79.3	76.7	75.0	73.8	72.9	72.0	71.4	71.2	19.7	93.3
22,5°	95.0	82.3	78.1	76.5	75.2	73.9	72.6	71.5	70.5	69.8	69.6	22.2	115.5
25,0°	81.5	77.6	76.4	75.4	74.3	72.9	71.5	70.2	69.0	68.1	67.7	24.6	140.0
27,5°	77.2	75.9	75.2	74.4	73.3	71.9	70.3	68.8	67.5	66.4	65.8	27.0	167.1
30,0°	75.0	74.4	74.0	73.4	72.4	71.1	69.4	67.6	66.1	64.8	64.1	29.1	196.2
32,5°	73.0	72.8	72.7	72.3	71.5	70.1	68.3	66.4	64.7	63.1	62.3	31.0	227.2
35,0°	70.7	70.7	71.1	70.8	70.1	68.7	66.8	64.7	62.8	61.1	60.1	32.6	259.8
37,5°	68.4	68.7	69.0	68.9	68.3	67.0	65.2	63.0	60.9	58.9	57.7	33.9	293.7
40,0°	65.9	66.3	66.6	66.6	66.1	64.9	62.8	60.8	58.8	56.8	55.7	34.8	328.4
42,5°	63.2	63.5	63.8	64.2	63.5	62.2	60.9	59.1	57.1	55.1	53.9	35.4	363.8
45,0°	60.3	60.4	60.9	60.8	60.4	59.8	59.0	57.6	56.0	54.0	52.7	35.9	399.7
47,5°	57.5	57.6	57.6	57.5	57.5	57.4	57.2	56.6	55.4	53.4	52.3	37.4	437.1
50,0°	54.8	54.7	54.2	54.4	54.7	55.2	55.8	56.1	55.4	53.9	52.9	40.1	477.3
52,5°	52.3	51.8	51.5	51.8	52.6	54.0	55.8	57.1	56.9	56.1	55.4	44.0	521.3
55,0°	49.7	49.1	49.3	49.8	51.2	54.0	57.2	59.7	59.7	59.4	59.0	49.0	570.3
57,5°	47.0	46.7	47.1	48.1	50.3	54.9	60.1	63.2	62.8	62.9	63.2	54.1	624.4
60,0°	44.4	44.3	44.9	46.7	50.3	56.4	63.0	65.8	64.7	64.9	65.4	58.2	682.6
62,5°	41.9	41.8	42.6	45.2	49.8	56.6	63.2	65.4	63.8	64.3	64.7	62.7	745.4
65,0°	39.4	39.1	40.3	43.4	48.5	55.5	62.0	63.2	60.9	61.1	61.7	66.5	811.9
67,5°	36.2	35.8	37.1	40.3	45.6	52.7	58.1	58.5	55.7	55.6	56.0	65.8	877.7
70,0°	32.2	31.7	33.2	36.7	41.9	47.8	51.8	51.5	48.8	48.0	48.6	56.2	933.9
72,5°	27.3	26.7	28.3	31.5	36.0	40.7	43.3	42.4	39.8	38.7	39.9	35.2	969.1
75,0°	21.9	21.8	23.2	26.0	29.5	33.0	34.3	33.1	30.6	30.0	31.7	16.3	985.4
77,5°	16.5	16.7	17.8	19.8	22.4	24.6	25.4	23.9	21.9	21.5	22.1	7.4	992.8
80,0°	11.3	11.4	12.2	13.6	15.1	16.4	16.6	15.2	13.9	13.5	13.6	3.9	996.7
82,5°	6.7	6.8	7.2	7.7	8.1	8.4	8.2	7.5	6.9	6.7	6.7	2.1	998.8
85,0°	3.2	3.1	3.2	3.3	3.4	3.6	3.5	3.1	2.8	2.7	2.7	0.8	999.7
87,5°	1.2	1.2	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1C1A</b> <b>EAN: 4058352853313</b>	<b>LP number</b> <b>58550_144</b>
---------------------------------------	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	21820	208.1	227.1	217.6
95	241	252	20703	193.8	211.2	202.5
90	229	250	19672	181.2	197.5	189.4
85	216	248	18556	167.9	182.9	175.4
80	203	246	17439	155.2	168.9	162.0
75	190	243	16322	143.1	155.4	149.2
70	178	241	15291	132.2	143.6	137.9
65	165	238	14174	120.8	131.2	126.0
60	152	235	13058	110.0	119.2	114.6
55	140	232	12027	100.1	108.6	104.4
50	127	229	10910	89.9	97.4	93.6
45	114	225	9793	79.9	86.5	83.2
40	102	221	8762	70.8	76.8	73.8
35	89	216	7646	61.4	66.4	63.9
30	76	210	6529	52.2	56.4	54.3
25	63	203	5412	43.6	46.9	45.2
20	51	195	4381	35.9	38.5	37.2
15	38	184	3264	27.6	29.6	28.6
13	32	178	2749	23.9	25.5	24.7