




Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E3K1A EAN: 4058352853757	LP number 59305_13
	Version mounting bracket Optic symmetric distribution RS7 Cover toughened safety glass Lamps LED 3000 K CRI ≥ 80 Controlgear ECG SITECO iQ Rated values Net luminous flux = 23190 lm Power consumption = 208.1 W Luminous efficacy = 111.4 lm/W	serial documentation 22.08.2023





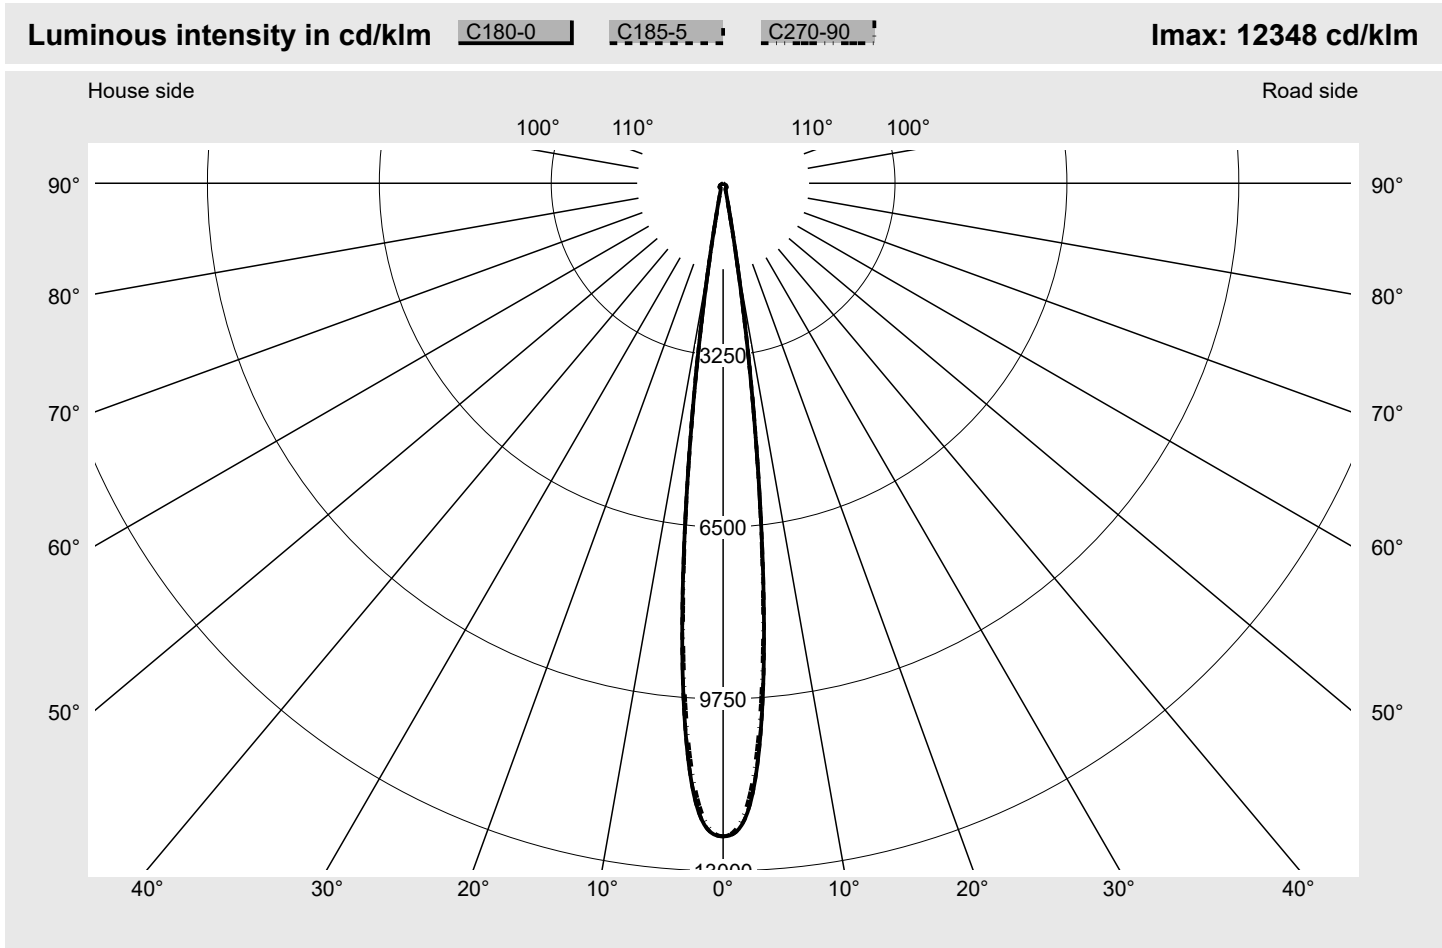

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	33.3
Imax 80°	10.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Photometric test report

Family
Floodlight FL21 midi

Order number: 5XA7782E3K1A
EAN: 4058352853757

LP number
59305_13

Envelope curve in cd/klm KMK 0°

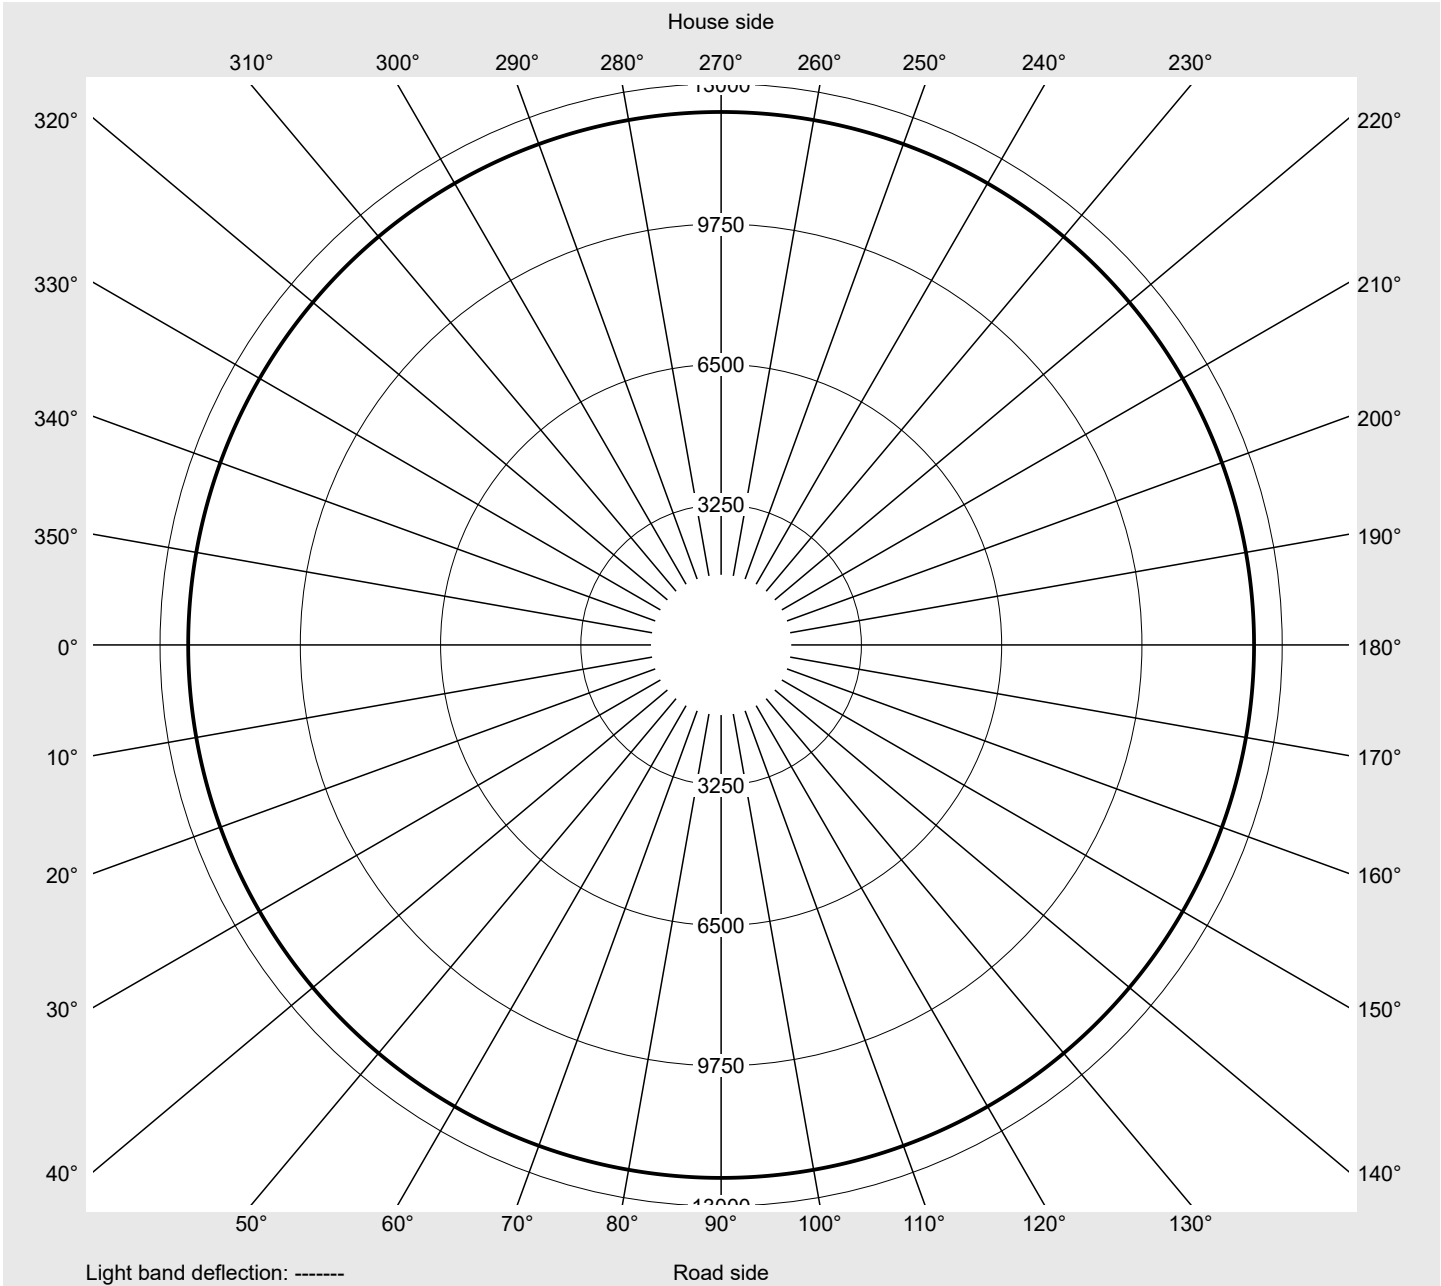

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E3K1A EAN: 4058352853757	LP number 59305_13
---------------------------------------	--	------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1
2,5°	11740.3	11736.4	11732.4	11728.5	11741.1	11753.7	11766.3	11748.6	11730.9	11713.2
5,0°	8862.5	8858.5	8854.4	8850.4	8960.8	9071.1	9181.5	9162.5	9143.5	9124.5
7,5°	4523.8	4521.3	4518.8	4516.3	4592.9	4669.4	4745.9	4754.6	4763.3	4771.9
10,0°	1521.6	1523.6	1525.5	1527.4	1539.1	1550.7	1562.3	1563.7	1565.2	1566.7
12,5°	537.5	527.2	516.9	506.6	509.7	512.9	516.0	503.2	490.5	477.7
15,0°	276.8	276.2	275.7	275.1	276.5	277.9	279.3	278.0	276.8	275.5
17,5°	185.9	185.4	185.0	184.5	185.1	185.7	186.2	185.7	185.2	184.7
20,0°	134.4	134.2	134.1	134.0	134.7	135.3	136.0	135.8	135.6	135.4
22,5°	118.4	118.3	118.2	118.2	118.5	118.9	119.3	119.6	119.9	120.2
25,0°	109.6	109.3	109.1	108.8	108.9	109.0	109.1	109.4	109.8	110.1
27,5°	104.3	104.0	103.7	103.4	103.2	103.0	102.9	103.0	103.2	103.4
30,0°	100.4	100.2	100.0	99.8	99.5	99.2	98.8	98.8	98.8	98.8
32,5°	99.1	98.7	98.4	98.0	97.7	97.4	97.1	96.9	96.7	96.6
35,0°	102.2	101.9	101.6	101.3	101.1	100.9	100.7	100.5	100.3	100.1
37,5°	105.3	105.0	104.7	104.4	104.6	104.8	104.9	105.0	105.0	105.1
40,0°	102.9	102.4	102.0	101.6	102.2	102.8	103.4	103.6	103.8	104.0
42,5°	99.8	99.0	98.2	97.3	98.1	98.8	99.6	99.9	100.1	100.4
45,0°	96.2	95.3	94.3	93.3	94.0	94.7	95.4	95.9	96.3	96.7
47,5°	90.7	89.6	88.5	87.5	88.3	89.1	89.9	90.4	90.9	91.4
50,0°	85.0	83.5	82.0	80.5	81.6	82.7	83.8	84.3	84.9	85.4
52,5°	79.1	77.5	75.8	74.1	75.4	76.6	77.9	78.3	78.6	79.0
55,0°	72.8	71.3	69.8	68.4	69.7	71.0	72.3	72.7	73.1	73.4
57,5°	66.1	64.6	63.1	61.6	63.0	64.4	65.8	66.1	66.5	66.8
60,0°	59.6	57.9	56.1	54.3	55.5	56.7	57.9	58.5	59.1	59.7
62,5°	52.9	51.3	49.6	48.0	48.8	49.6	50.4	51.3	52.2	53.0
65,0°	45.4	44.2	43.0	41.8	42.6	43.3	44.1	44.7	45.3	45.9
67,5°	38.3	37.5	36.8	36.0	36.7	37.5	38.2	38.7	39.2	39.6
70,0°	31.9	31.3	30.8	30.3	31.0	31.7	32.4	32.7	33.0	33.3
72,5°	25.9	25.6	25.3	25.0	25.5	26.0	26.5	26.7	26.9	27.1
75,0°	20.9	20.5	20.1	19.6	20.0	20.4	20.8	20.9	21.0	21.1
77,5°	15.9	15.4	14.9	14.5	14.8	15.1	15.4	15.4	15.5	15.6
80,0°	10.4	10.2	9.9	9.7	9.9	10.0	10.1	10.1	10.0	9.9
82,5°	5.7	5.6	5.5	5.4	5.5	5.5	5.6	5.5	5.4	5.4
85,0°	2.4	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.1	2.1
87,5°	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E3K1A EAN: 4058352853757	LP number 59305_13
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°			
Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	18.5	18.5
2,5°	11704.4	11695.7	11686.9	11645.2	11603.6	11561.9	11563.0	11564.1	11565.1	139.7	158.2
5,0°	9110.0	9095.6	9081.1	8940.8	8800.6	8660.3	8659.8	8659.4	8658.9	213.7	371.9
7,5°	4772.8	4773.6	4774.4	4699.1	4623.7	4548.4	4547.8	4547.2	4546.6	166.3	538.2
10,0°	1560.2	1553.8	1547.4	1523.7	1500.0	1476.3	1480.8	1485.4	1490.0	72.9	611.1
12,5°	479.8	481.9	484.0	474.2	464.5	454.7	460.6	466.5	472.4	29.1	640.2
15,0°	275.0	274.5	274.0	272.5	271.0	269.5	269.7	270.0	270.3	19.5	659.7
17,5°	184.6	184.6	184.5	183.4	182.3	181.2	181.7	182.1	182.6	15.2	674.8
20,0°	136.0	136.6	137.2	136.7	136.3	135.8	136.1	136.4	136.7	12.7	687.6
22,5°	120.6	121.0	121.3	121.0	120.7	120.4	120.4	120.5	120.6	12.6	700.1
25,0°	110.3	110.5	110.7	110.6	110.5	110.4	110.4	110.4	110.5	12.7	712.9
27,5°	103.5	103.5	103.6	103.7	103.7	103.8	103.9	103.9	104.0	13.1	726.0
30,0°	98.9	99.0	99.0	99.2	99.4	99.6	99.5	99.4	99.3	13.6	739.6
32,5°	96.5	96.5	96.5	96.5	96.6	96.6	96.7	96.9	97.0	14.3	753.9
35,0°	99.9	99.8	99.7	99.7	99.7	99.7	99.9	100.0	100.2	15.8	769.7
37,5°	104.9	104.6	104.4	104.2	104.1	103.9	104.1	104.3	104.5	17.5	787.1
40,0°	103.6	103.3	102.9	102.3	101.7	101.1	101.5	101.9	102.3	18.1	805.2
42,5°	100.0	99.6	99.2	98.5	97.9	97.2	98.0	98.8	99.6	18.3	823.5
45,0°	96.2	95.7	95.2	94.7	94.1	93.6	94.4	95.1	95.9	18.4	842.0
47,5°	90.8	90.2	89.6	88.9	88.3	87.7	88.2	88.8	89.4	18.1	860.0
50,0°	84.6	83.7	82.8	82.0	81.2	80.4	81.2	81.9	82.6	17.4	877.4
52,5°	78.1	77.2	76.2	75.5	74.7	74.0	74.9	75.9	76.8	16.6	894.1
55,0°	72.4	71.4	70.4	69.8	69.2	68.6	68.9	69.2	69.5	15.9	909.9
57,5°	65.9	65.0	64.1	63.3	62.5	61.7	61.8	61.9	62.0	14.8	924.7
60,0°	58.7	57.6	56.5	55.7	54.9	54.1	54.3	54.6	54.9	13.4	938.2
62,5°	51.9	50.7	49.5	48.9	48.3	47.7	48.0	48.3	48.7	12.1	950.3
65,0°	45.0	44.1	43.2	42.6	42.0	41.3	41.7	42.1	42.6	10.8	961.1
67,5°	38.8	38.0	37.2	36.7	36.2	35.7	36.0	36.3	36.6	9.5	970.6
70,0°	32.7	32.2	31.6	31.2	30.7	30.2	30.5	30.8	31.1	8.1	978.7
72,5°	26.7	26.3	25.9	28.1	30.4	32.7	30.3	28.0	25.6	7.1	985.8
75,0°	20.8	20.6	20.3	20.1	19.8	19.6	18.9	18.3	17.6	5.3	991.1
77,5°	15.4	15.1	14.9	14.7	14.5	14.3	14.6	14.8	15.0	4.0	995.1
80,0°	9.9	9.8	9.8	9.7	9.6	9.5	9.6	9.7	9.8	2.7	997.8
82,5°	5.4	5.4	5.4	5.3	5.3	5.2	5.3	5.4	5.5	1.5	999.3
85,0°	2.1	2.2	2.2	2.1	2.1	2.1	2.1	2.2	2.2	0.6	999.9
87,5°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E3K1A EAN: 4058352853757	LP number 59305_13
---------------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	23190	208.1	227.1	217.6
95	241	252	22003	193.9	211.3	202.6
90	229	250	20908	181.2	197.5	189.4
85	216	248	19721	167.9	182.9	175.4
80	203	246	18534	155.2	168.9	162.0
75	190	243	17347	143.1	155.5	149.3
70	178	241	16251	132.2	143.7	138.0
65	165	238	15064	120.9	131.2	126.0
60	152	235	13877	110.0	119.3	114.6
55	140	232	12782	100.2	108.7	104.4
50	127	229	11595	90.0	97.4	93.7
45	114	225	10408	79.9	86.6	83.2
40	102	221	9313	70.8	76.8	73.8
35	89	216	8126	61.4	66.4	63.9
30	76	210	6939	52.3	56.4	54.4
25	63	203	5752	43.7	46.9	45.3
20	51	195	4656	35.9	38.5	37.2
15	38	184	3469	27.6	29.6	28.6
13	32	178	2922	23.9	25.5	24.7