

Photometric test report

Family
Floodlight FL21 midi

Order number: 5XA7782E4B1A
EAN: 4058352853818

LP number
59238_87



Version	mounting bracket
Optic	symmetric distribution RS12
Cover	toughened safety glass
Lamps	LED 4000 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 27880 lm Power consumption = 208.1 W Luminous efficacy = 134 lm/W


serial
documentation
22.08.2023

siteco

Luminous intensity in cd/klm

C180-0

Imax: 2873 cd/klm

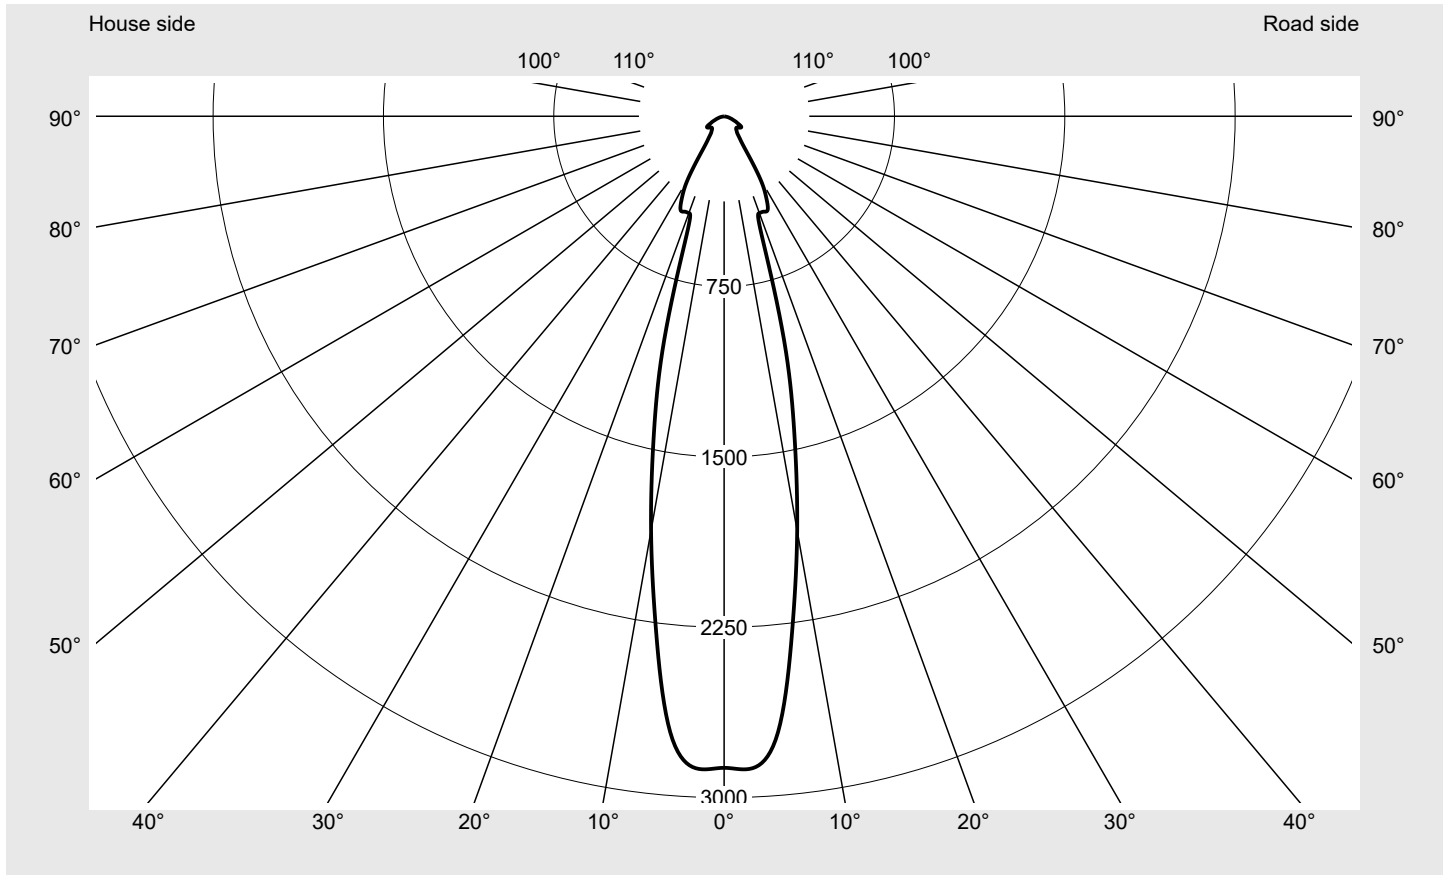

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E4B1A EAN: 4058352853818	LP number 59238_87
--	--	-------------------------------------

Envelope curve in cd/klm KMK 2.5° KMK 0° siteco

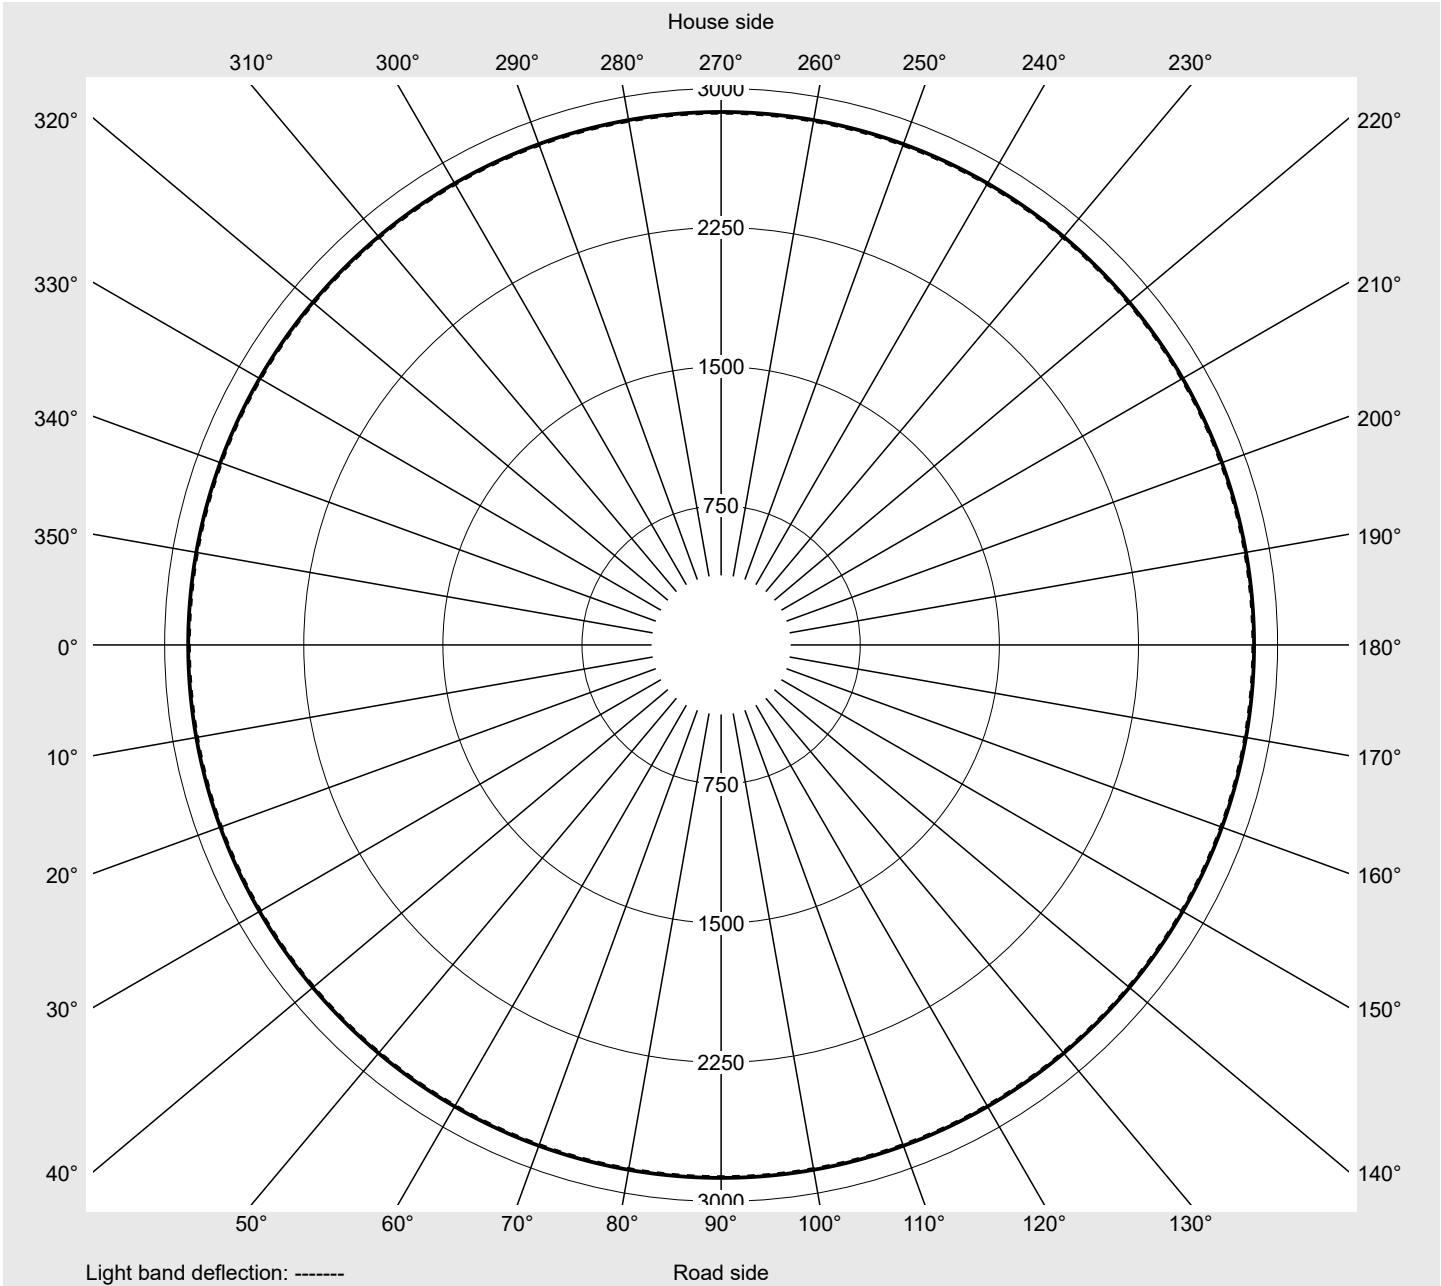

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E4B1A EAN: 4058352853818	LP number 59238_87
---------------------------------------	--	------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E4B1A EAN: 4058352853818	LP number 59238_87
---------------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	27880	208.1	227.1	217.6
95	241	252	26453	193.9	211.3	202.6
90	229	250	25136	181.3	197.6	189.4
85	216	248	23709	168.1	183.1	175.6
80	203	246	22282	155.4	169.1	162.2
75	190	243	20855	143.4	155.7	149.6
70	178	241	19538	132.4	143.9	138.2
65	165	238	18111	121.2	131.5	126.4
60	152	235	16684	110.3	119.6	115.0
55	140	232	15367	100.4	109.0	104.7
50	127	229	13940	90.3	97.8	94.0
45	114	225	12513	80.2	86.9	83.6
40	102	221	11196	71.1	77.1	74.1
35	89	216	9769	61.7	66.7	64.2
30	76	210	8342	52.5	56.7	54.6
25	63	203	6915	43.8	47.1	45.4
20	51	195	5598	36.1	38.7	37.4
15	38	184	4171	27.8	29.7	28.8
13	32	178	3512	24.0	25.6	24.8