




Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782F1K1A EAN: 4058352854280	LP number 59305_17
	Version mounting bracket Optic symmetric distribution RS7 Cover toughened safety glass Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 29700 lm Power consumption = 270.2 W Luminous efficacy = 109.9 lm/W	serial documentation 22.08.2023





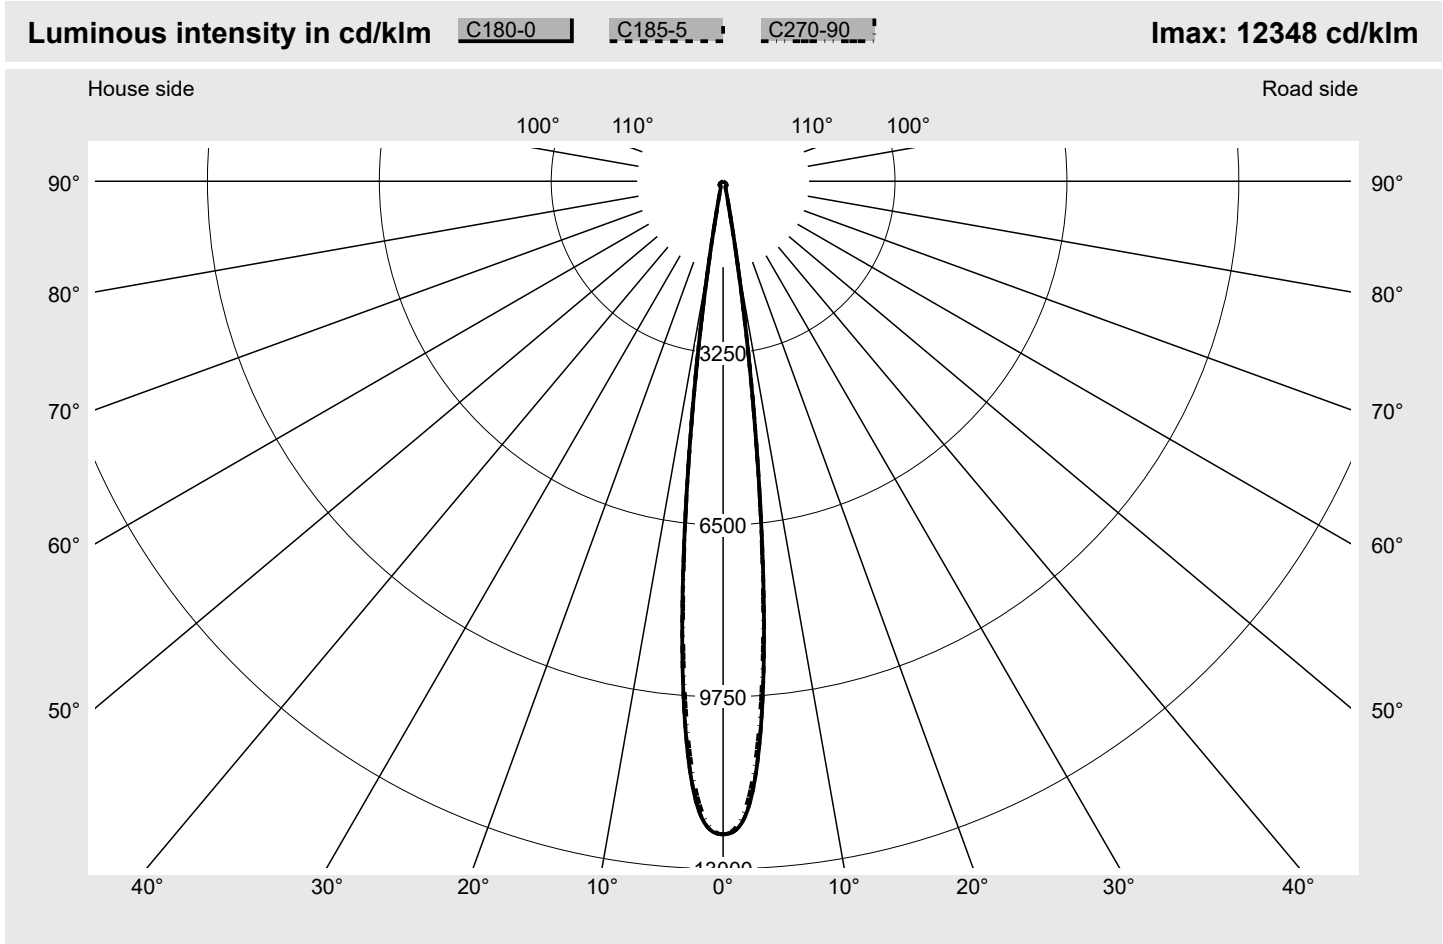


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	33.3
Imax 80°	10.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782F1K1A EAN: 4058352854280	LP number 59305_17
---------------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 0°** **sitEco**

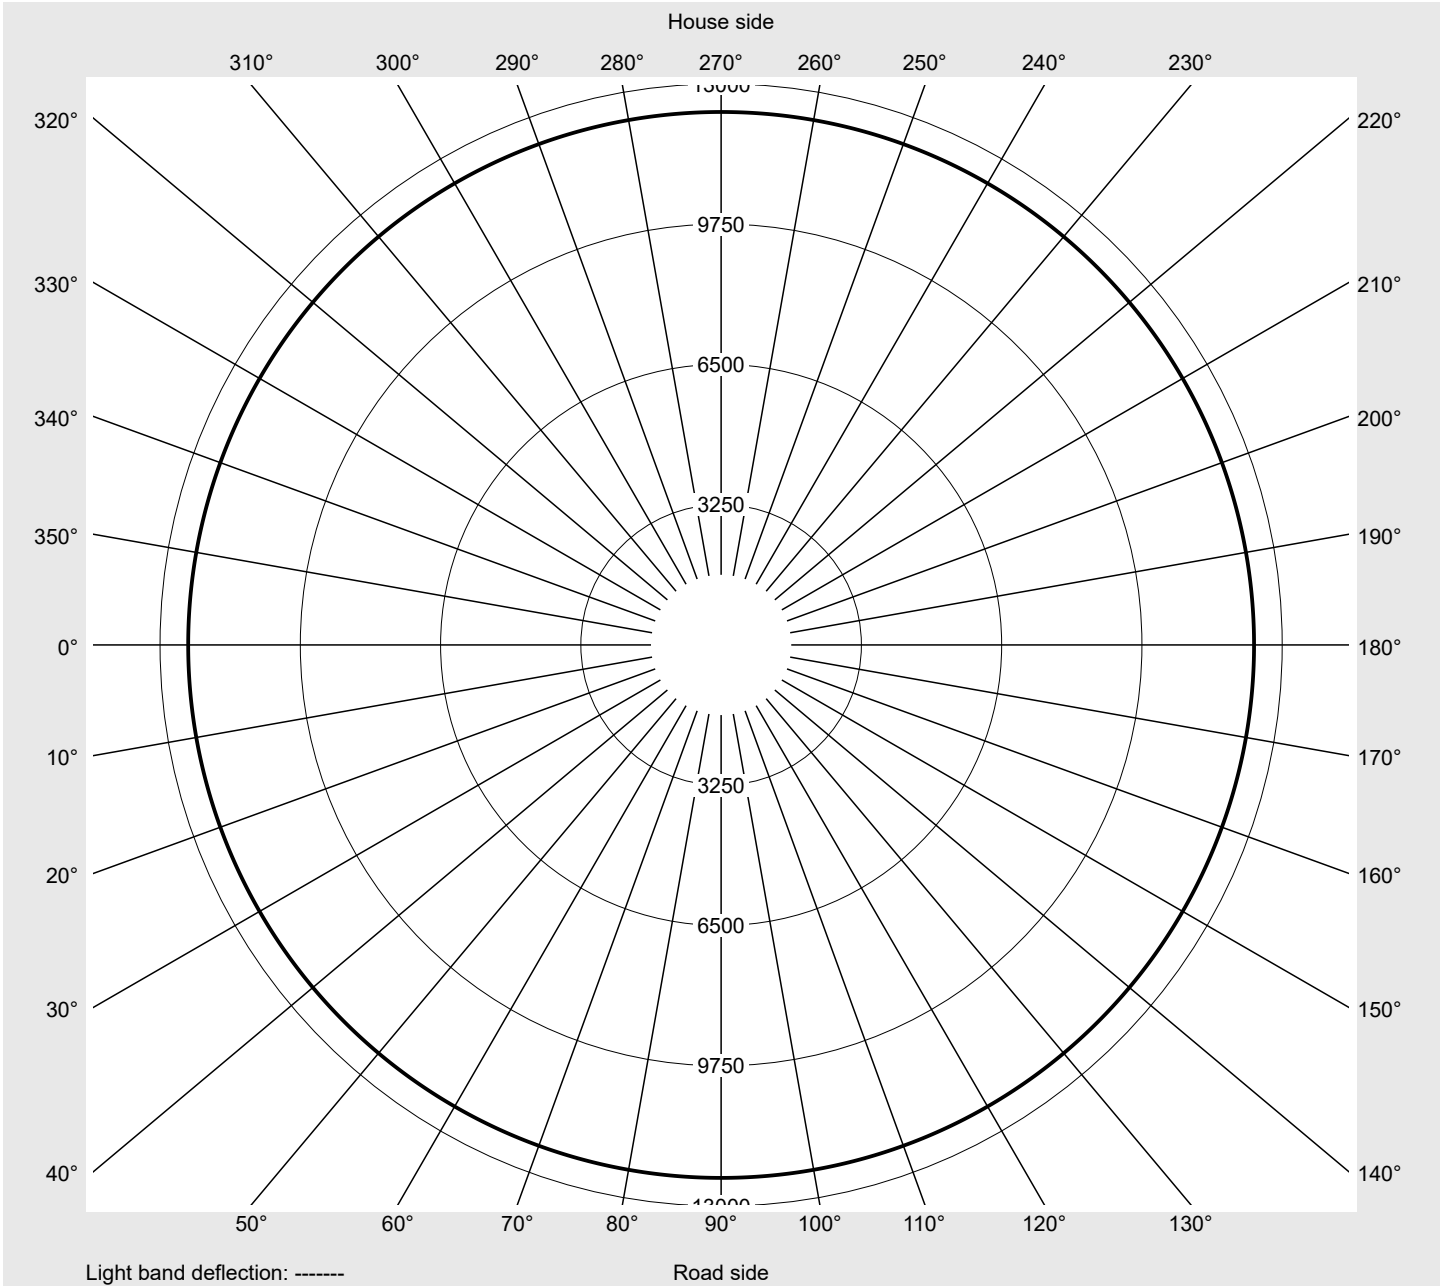

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782F1K1A EAN: 4058352854280	LP number 59305_17
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1
2,5°	11740.3	11736.4	11732.4	11728.5	11741.1	11753.7	11766.3	11748.6	11730.9	11713.2
5,0°	8862.5	8858.5	8854.4	8850.4	8960.8	9071.1	9181.5	9162.5	9143.5	9124.5
7,5°	4523.8	4521.3	4518.8	4516.3	4592.9	4669.4	4745.9	4754.6	4763.3	4771.9
10,0°	1521.6	1523.6	1525.5	1527.4	1539.1	1550.7	1562.3	1563.7	1565.2	1566.7
12,5°	537.5	527.2	516.9	506.6	509.7	512.9	516.0	503.2	490.5	477.7
15,0°	276.8	276.2	275.7	275.1	276.5	277.9	279.3	278.0	276.8	275.5
17,5°	185.9	185.4	185.0	184.5	185.1	185.7	186.2	185.7	185.2	184.7
20,0°	134.4	134.2	134.1	134.0	134.7	135.3	136.0	135.8	135.6	135.4
22,5°	118.4	118.3	118.2	118.2	118.5	118.9	119.3	119.6	119.9	120.2
25,0°	109.6	109.3	109.1	108.8	108.9	109.0	109.1	109.4	109.8	110.1
27,5°	104.3	104.0	103.7	103.4	103.2	103.0	102.9	103.0	103.2	103.4
30,0°	100.4	100.2	100.0	99.8	99.5	99.2	98.8	98.8	98.8	98.8
32,5°	99.1	98.7	98.4	98.0	97.7	97.4	97.1	96.9	96.7	96.6
35,0°	102.2	101.9	101.6	101.3	101.1	100.9	100.7	100.5	100.3	100.1
37,5°	105.3	105.0	104.7	104.4	104.6	104.8	104.9	105.0	105.0	105.1
40,0°	102.9	102.4	102.0	101.6	102.2	102.8	103.4	103.6	103.8	104.0
42,5°	99.8	99.0	98.2	97.3	98.1	98.8	99.6	99.9	100.1	100.4
45,0°	96.2	95.3	94.3	93.3	94.0	94.7	95.4	95.9	96.3	96.7
47,5°	90.7	89.6	88.5	87.5	88.3	89.1	89.9	90.4	90.9	91.4
50,0°	85.0	83.5	82.0	80.5	81.6	82.7	83.8	84.3	84.9	85.4
52,5°	79.1	77.5	75.8	74.1	75.4	76.6	77.9	78.3	78.6	79.0
55,0°	72.8	71.3	69.8	68.4	69.7	71.0	72.3	72.7	73.1	73.4
57,5°	66.1	64.6	63.1	61.6	63.0	64.4	65.8	66.1	66.5	66.8
60,0°	59.6	57.9	56.1	54.3	55.5	56.7	57.9	58.5	59.1	59.7
62,5°	52.9	51.3	49.6	48.0	48.8	49.6	50.4	51.3	52.2	53.0
65,0°	45.4	44.2	43.0	41.8	42.6	43.3	44.1	44.7	45.3	45.9
67,5°	38.3	37.5	36.8	36.0	36.7	37.5	38.2	38.7	39.2	39.6
70,0°	31.9	31.3	30.8	30.3	31.0	31.7	32.4	32.7	33.0	33.3
72,5°	25.9	25.6	25.3	25.0	25.5	26.0	26.5	26.7	26.9	27.1
75,0°	20.9	20.5	20.1	19.6	20.0	20.4	20.8	20.9	21.0	21.1
77,5°	15.9	15.4	14.9	14.5	14.8	15.1	15.4	15.4	15.5	15.6
80,0°	10.4	10.2	9.9	9.7	9.9	10.0	10.1	10.1	10.0	9.9
82,5°	5.7	5.6	5.5	5.4	5.5	5.5	5.6	5.5	5.4	5.4
85,0°	2.4	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.1	2.1
87,5°	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782F1K1A EAN: 4058352854280	LP number 59305_17
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°	270°			
	310°	305°	300°	295°	290°	285°	280°	275°				
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	18.5	18.5
2,5°	11704.4	11695.7	11686.9	11645.2	11603.6	11561.9	11563.0	11564.1	11565.1	11565.1	139.7	158.2
5,0°	9110.0	9095.6	9081.1	8940.8	8800.6	8660.3	8659.8	8659.4	8658.9	8658.9	213.7	371.9
7,5°	4772.8	4773.6	4774.4	4699.1	4623.7	4548.4	4547.8	4547.2	4546.6	4546.6	166.3	538.2
10,0°	1560.2	1553.8	1547.4	1523.7	1500.0	1476.3	1480.8	1485.4	1490.0	1490.0	72.9	611.1
12,5°	479.8	481.9	484.0	474.2	464.5	454.7	460.6	466.5	472.4	472.4	29.1	640.2
15,0°	275.0	274.5	274.0	272.5	271.0	269.5	269.7	270.0	270.3	270.3	19.5	659.7
17,5°	184.6	184.6	184.5	183.4	182.3	181.2	181.7	182.1	182.6	182.6	15.2	674.8
20,0°	136.0	136.6	137.2	136.7	136.3	135.8	136.1	136.4	136.7	136.7	12.7	687.6
22,5°	120.6	121.0	121.3	121.0	120.7	120.4	120.4	120.5	120.6	120.6	12.6	700.1
25,0°	110.3	110.5	110.7	110.6	110.5	110.4	110.4	110.4	110.5	110.5	12.7	712.9
27,5°	103.5	103.5	103.6	103.7	103.7	103.8	103.9	103.9	104.0	104.0	13.1	726.0
30,0°	98.9	99.0	99.0	99.2	99.4	99.6	99.5	99.4	99.3	99.3	13.6	739.6
32,5°	96.5	96.5	96.5	96.5	96.6	96.6	96.7	96.9	97.0	97.0	14.3	753.9
35,0°	99.9	99.8	99.7	99.7	99.7	99.7	99.9	100.0	100.2	100.2	15.8	769.7
37,5°	104.9	104.6	104.4	104.2	104.1	103.9	104.1	104.3	104.5	104.5	17.5	787.1
40,0°	103.6	103.3	102.9	102.3	101.7	101.1	101.5	101.9	102.3	102.3	18.1	805.2
42,5°	100.0	99.6	99.2	98.5	97.9	97.2	98.0	98.8	99.6	99.6	18.3	823.5
45,0°	96.2	95.7	95.2	94.7	94.1	93.6	94.4	95.1	95.9	95.9	18.4	842.0
47,5°	90.8	90.2	89.6	88.9	88.3	87.7	88.2	88.8	89.4	89.4	18.1	860.0
50,0°	84.6	83.7	82.8	82.0	81.2	80.4	81.2	81.9	82.6	82.6	17.4	877.4
52,5°	78.1	77.2	76.2	75.5	74.7	74.0	74.9	75.9	76.8	76.8	16.6	894.1
55,0°	72.4	71.4	70.4	69.8	69.2	68.6	68.9	69.2	69.5	69.5	15.9	909.9
57,5°	65.9	65.0	64.1	63.3	62.5	61.7	61.8	61.9	62.0	62.0	14.8	924.7
60,0°	58.7	57.6	56.5	55.7	54.9	54.1	54.3	54.6	54.9	54.9	13.4	938.2
62,5°	51.9	50.7	49.5	48.9	48.3	47.7	48.0	48.3	48.7	48.7	12.1	950.3
65,0°	45.0	44.1	43.2	42.6	42.0	41.3	41.7	42.1	42.6	42.6	10.8	961.1
67,5°	38.8	38.0	37.2	36.7	36.2	35.7	36.0	36.3	36.6	36.6	9.5	970.6
70,0°	32.7	32.2	31.6	31.2	30.7	30.2	30.5	30.8	31.1	31.1	8.1	978.7
72,5°	26.7	26.3	25.9	28.1	30.4	32.7	30.3	28.0	25.6	25.6	7.1	985.8
75,0°	20.8	20.6	20.3	20.1	19.8	19.6	18.9	18.3	17.6	17.6	5.3	991.1
77,5°	15.4	15.1	14.9	14.7	14.5	14.3	14.6	14.8	15.0	15.0	4.0	995.1
80,0°	9.9	9.8	9.8	9.7	9.6	9.5	9.6	9.7	9.8	9.8	2.7	997.8
82,5°	5.4	5.4	5.4	5.3	5.3	5.2	5.3	5.4	5.5	5.5	1.5	999.3
85,0°	2.1	2.2	2.2	2.1	2.1	2.1	2.1	2.2	2.2	2.2	0.6	999.9
87,5°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782F1K1A EAN: 4058352854280	LP number 59305_17
---------------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	29700	270.2	286.6	278.4
95	241	252	28180	251.6	266.7	259.2
90	229	250	26777	235.2	249.1	242.2
85	216	248	25257	218.1	230.9	224.5
80	203	246	23737	201.7	213.6	207.6
75	190	243	22217	186.1	196.8	191.4
70	178	241	20813	172.1	182.0	177.0
65	165	238	19293	157.5	166.5	162.0
60	152	235	17773	143.3	151.5	147.4
55	140	232	16370	130.7	138.1	134.4
50	127	229	14850	117.2	123.8	120.5
45	114	225	13330	104.0	110.1	107.0
40	102	221	11927	92.2	97.4	94.8
35	89	216	10407	79.8	84.2	82.0
30	76	210	8887	67.7	71.4	69.6
25	63	203	7367	56.1	59.0	57.6
20	51	195	5963	45.6	48.0	46.8
15	38	184	4443	34.6	36.4	35.5
12	31	177	3625	28.8	30.2	29.5