
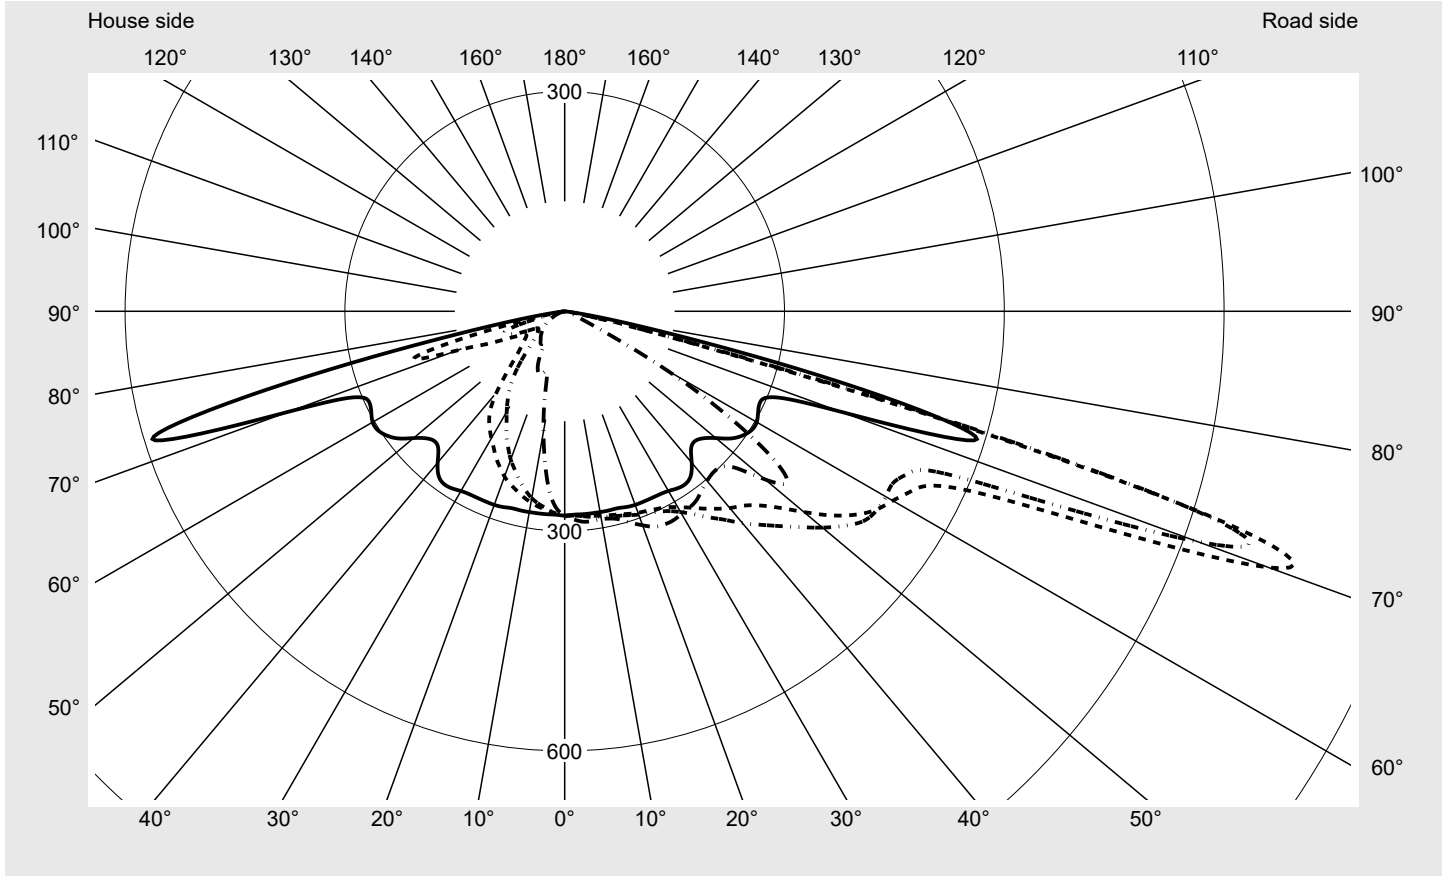


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P0.8a), Back Light Control (BLC) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 8210 lm Power consumption = 70.9 W Luminous efficacy = 115.8 lm/W	serial documentation 18.01.2024



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 1022 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	1022.3
Imax 80°	56.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
--	--	-------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

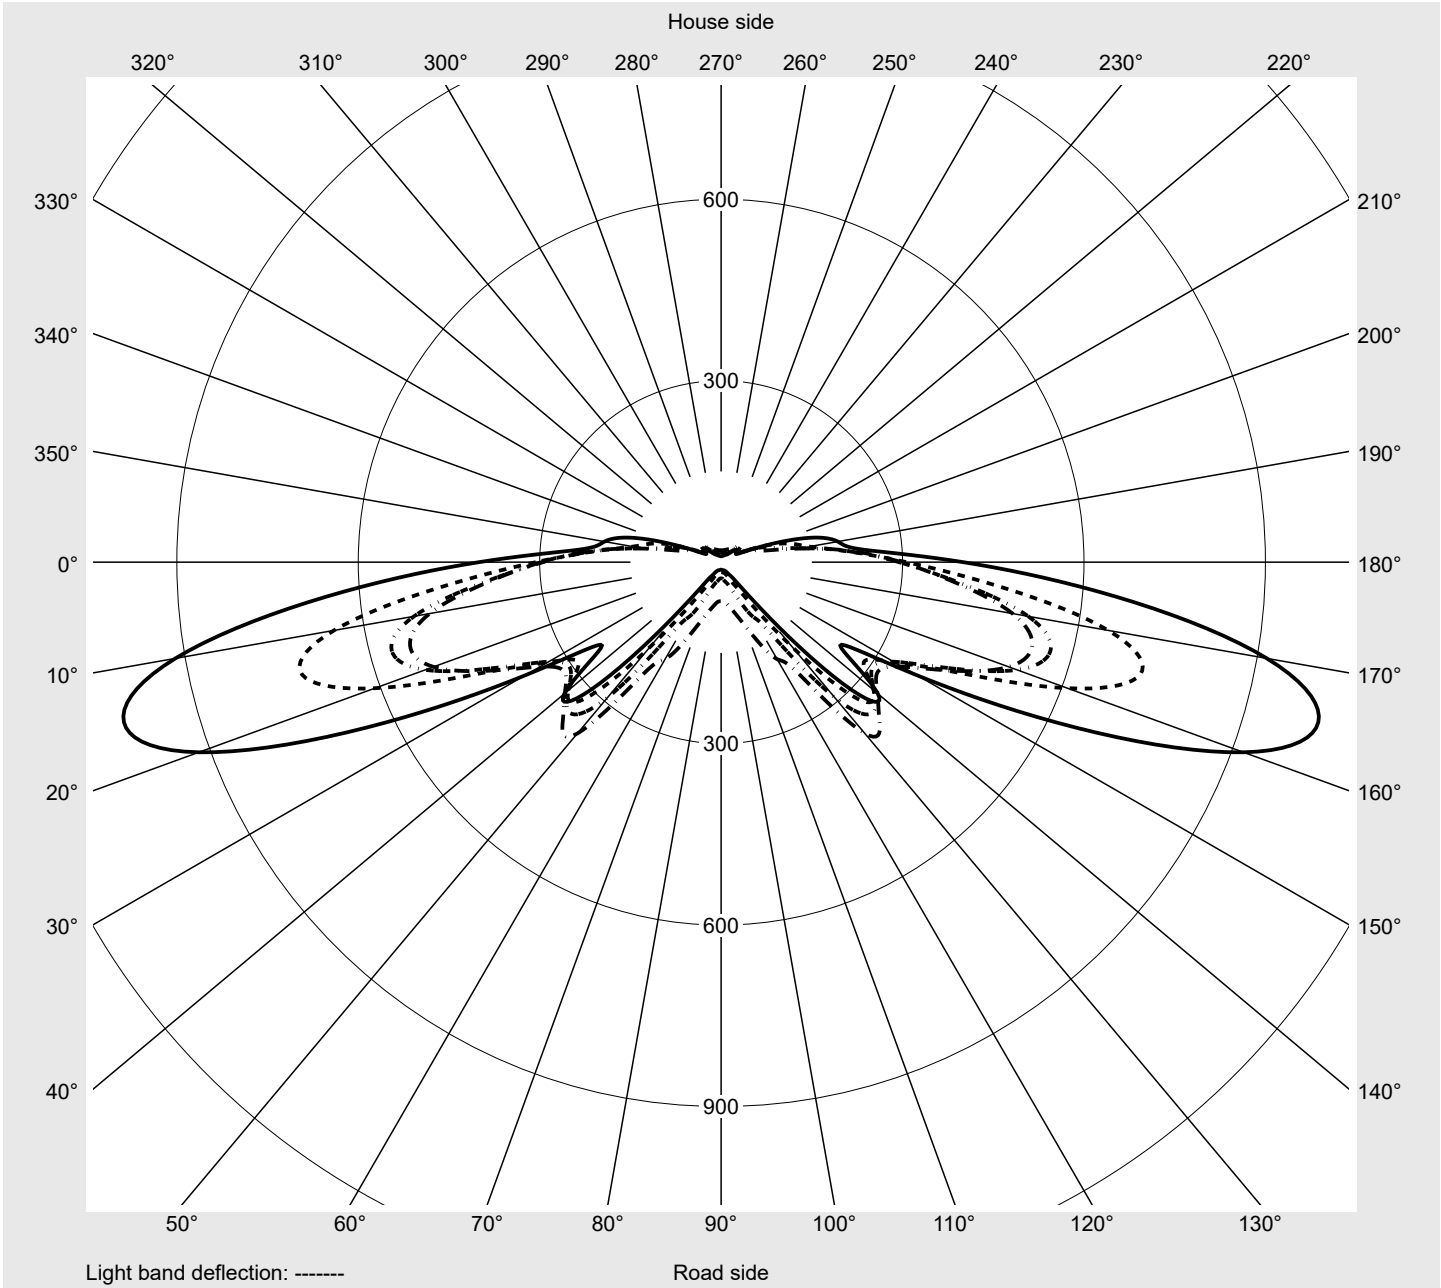

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	277.9	277.8	278.3	278.5	279.1	279.5	279.7	280.3	281.1	281.1	281.8	282.0	282.5
5,0°	278.0	278.0	278.8	279.6	280.7	281.8	282.5	283.4	284.3	284.7	285.3	285.7	286.3
7,5°	278.2	278.8	279.7	281.6	283.0	284.3	285.2	285.8	286.5	286.6	286.8	287.0	287.2
10,0°	278.3	279.3	281.1	283.2	284.8	286.1	286.8	287.1	287.4	287.5	287.6	287.5	287.6
12,5°	278.4	280.6	282.9	285.1	287.1	288.1	288.1	288.3	288.6	288.3	288.2	288.3	288.1
15,0°	278.3	281.8	284.2	287.0	288.9	289.7	290.4	290.4	290.4	290.5	290.7	291.2	291.5
17,5°	280.1	284.2	287.0	289.9	291.8	292.6	293.2	293.3	294.2	295.6	296.5	297.9	299.1
20,0°	281.2	286.5	289.9	292.7	295.2	296.4	297.4	298.7	300.7	302.2	304.8	306.3	307.6
22,5°	281.2	288.0	291.8	294.7	298.0	300.7	303.7	306.7	309.6	312.0	314.3	316.4	318.0
25,0°	281.2	289.0	293.5	297.6	302.0	305.6	310.8	316.1	320.1	323.0	325.6	327.5	328.0
27,5°	281.6	290.6	296.3	301.5	307.4	313.2	319.9	326.8	332.3	336.2	338.0	338.5	336.9
30,0°	283.2	294.4	301.5	308.8	316.5	324.6	332.6	340.2	345.8	350.2	351.0	348.3	344.3
32,5°	286.5	299.7	308.4	317.7	328.5	340.0	349.8	357.0	362.1	365.5	364.2	358.0	349.5
35,0°	287.6	303.8	315.5	328.7	343.4	357.5	368.6	376.7	381.4	382.7	377.3	366.1	353.1
37,5°	282.8	302.1	319.8	339.7	358.7	375.8	388.1	395.7	398.9	396.8	386.6	370.4	354.4
40,0°	269.7	294.5	321.2	350.6	377.6	398.0	410.2	417.0	415.9	407.6	392.5	373.6	355.1
42,5°	255.3	287.6	322.7	360.0	395.2	420.8	432.6	434.9	428.7	414.1	394.4	373.9	354.4
45,0°	251.0	289.5	331.0	374.7	414.6	444.9	453.6	450.5	436.8	415.6	393.7	371.5	352.8
47,5°	256.6	303.0	350.2	396.9	436.1	462.6	468.6	458.1	439.5	412.5	387.5	369.7	355.1
50,0°	269.2	324.0	378.1	426.2	459.3	475.7	475.8	456.8	430.3	401.5	381.2	373.1	369.5
52,5°	285.2	346.9	408.8	457.5	481.0	483.4	467.9	440.5	409.6	388.7	382.1	388.8	404.4
55,0°	295.9	364.8	434.7	484.0	498.6	480.9	443.0	412.5	385.1	377.3	391.6	422.7	440.8
57,5°	302.2	378.2	457.4	504.1	505.0	463.7	409.7	376.6	362.7	372.1	410.7	405.5	386.0
60,0°	302.7	385.2	474.2	517.0	506.3	445.5	376.2	342.3	346.6	374.1	408.1	323.4	289.9
62,5°	297.6	389.4	489.3	532.5	506.1	424.7	345.6	316.1	337.3	370.1	369.8	228.7	185.2
65,0°	294.2	397.3	515.7	563.9	520.7	414.1	329.1	304.9	329.7	352.9	292.0	146.3	103.0
67,5°	306.5	462.0	650.1	717.4	609.4	431.9	331.0	288.1	329.0	319.8	183.6	76.0	42.3
70,0°	400.3	655.6	916.4	1022.3	919.1	647.3	374.3	240.7	338.2	282.9	84.5	28.5	20.0
72,5°	586.0	762.4	853.4	904.4	899.0	672.4	361.6	293.9	353.5	133.4	22.0	16.9	14.5
75,0°	449.7	381.0	325.6	308.5	339.8	261.0	278.4	408.8	241.2	30.0	14.0	12.7	10.9
77,5°	187.6	136.4	104.4	83.4	66.4	31.3	81.0	143.9	55.8	10.9	9.4	9.1	7.9
80,0°	56.2	38.7	28.1	20.2	12.5	7.1	6.9	10.5	5.9	5.4	6.4	5.7	5.0
82,5°	9.6	8.1	6.9	5.8	4.4	3.9	3.4	3.0	2.7	2.5	2.7	2.4	2.4
85,0°	2.7	2.5	2.3	2.2	1.9	1.7	1.6	1.6	1.3	1.3	1.2	1.1	1.0
87,5°	1.5	1.3	1.2	1.2	1.1	1.0	1.0	0.8	0.8	0.8	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	282.9	283.2	283.5	283.8	284.1	284.2	277.4	276.4	276.1	275.6	274.5	273.9	273.1
5,0°	286.6	287.0	287.2	287.6	288.0	288.3	277.0	274.5	272.6	270.8	268.5	266.3	264.1
7,5°	287.4	287.5	287.8	288.2	288.3	288.6	276.2	272.6	269.3	265.7	261.4	256.5	251.1
10,0°	287.2	287.1	287.2	287.7	288.3	288.1	275.3	270.3	265.0	258.9	250.7	242.0	231.8
12,5°	288.1	288.2	288.7	289.2	289.4	289.8	274.1	267.4	259.7	249.5	236.8	222.9	208.7
15,0°	292.0	292.1	292.7	293.8	294.2	294.4	273.1	264.3	253.4	238.6	221.3	203.4	184.9
17,5°	299.9	300.3	300.8	301.6	302.6	302.8	273.2	261.7	247.2	226.6	204.9	181.7	160.7
20,0°	308.0	308.8	309.2	309.9	310.3	310.8	273.2	259.9	240.1	215.4	188.9	162.4	139.4
22,5°	318.6	318.4	318.1	317.7	317.8	318.3	271.5	255.2	230.6	201.6	170.3	143.2	114.9
25,0°	327.4	325.7	323.3	321.8	320.7	321.2	269.5	249.4	221.2	187.9	153.1	121.8	90.5
27,5°	334.3	330.2	326.2	323.3	321.5	321.5	266.7	243.2	210.0	171.9	135.7	99.1	71.1
30,0°	339.2	333.1	326.9	322.2	319.5	319.3	265.3	237.9	200.2	158.3	118.4	79.9	62.3
32,5°	341.5	333.3	325.9	320.7	318.1	317.3	264.9	232.9	190.4	145.0	101.3	66.5	60.1
35,0°	342.5	333.9	325.9	318.9	315.1	314.2	263.0	225.7	179.7	131.6	85.9	59.6	60.6
37,5°	342.0	331.6	322.7	314.3	309.4	307.4	254.3	213.3	165.2	116.7	73.0	56.4	60.0
40,0°	340.1	328.2	319.5	310.6	304.4	302.4	235.8	192.1	144.6	99.3	62.9	54.2	57.1
42,5°	337.2	325.3	318.1	307.7	301.1	299.2	216.4	169.2	122.0	81.3	56.4	52.1	54.2
45,0°	337.1	325.6	317.5	309.4	303.1	301.1	203.9	150.0	103.2	66.2	51.0	50.1	52.0
47,5°	343.8	336.0	329.8	323.8	318.2	316.4	200.2	139.3	88.8	56.2	48.4	48.6	50.7
50,0°	367.8	368.7	368.6	364.8	359.1	357.0	204.6	135.1	79.1	49.7	47.4	49.0	50.6
52,5°	419.9	422.4	412.8	399.2	386.2	382.4	211.0	133.0	72.3	46.2	47.5	49.5	49.6
55,0°	424.6	395.0	374.2	359.3	344.6	341.1	216.4	132.7	66.2	43.9	45.5	46.9	45.5
57,5°	353.8	310.6	285.4	270.3	259.7	257.6	218.5	130.4	61.9	43.1	41.0	41.0	39.3
60,0°	250.3	204.6	182.6	173.4	165.1	161.8	217.0	129.2	64.3	47.9	38.9	36.0	36.2
62,5°	145.5	108.8	86.7	74.0	66.0	64.6	214.2	129.0	73.8	58.1	41.2	33.5	34.8
65,0°	67.5	45.0	35.7	31.3	27.6	26.8	210.1	133.0	90.9	71.2	45.1	31.9	34.7
67,5°	26.8	20.8	18.5	17.5	16.8	16.4	208.5	148.3	118.6	81.6	45.1	29.9	33.7
70,0°	16.2	14.4	13.8	13.2	12.7	12.3	236.4	195.9	156.6	87.0	37.9	28.1	32.3
72,5°	12.8	11.4	10.8	10.2	9.6	9.4	409.6	322.7	215.6	78.7	30.0	27.9	29.6
75,0°	9.7	8.6	7.9	7.5	7.1	7.0	414.6	266.9	148.4	43.3	26.7	27.7	25.5
77,5°	6.7	5.8	5.3	5.0	4.7	4.6	158.3	92.5	50.4	16.7	18.7	22.5	20.1
80,0°	4.0	3.5	3.0	2.9	2.7	2.7	44.1	27.3	12.5	8.6	10.0	12.3	11.7
82,5°	2.2	2.1	1.8	1.8	1.7	1.7	10.0	6.4	4.8	4.8	5.1	5.3	5.2
85,0°	1.0	1.0	1.0	0.8	0.8	1.0	2.8	2.8	2.8	2.7	2.5	2.4	2.2
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	0.4	0.4
2,5°	272.2	271.8	271.0	270.4	269.8	269.5	269.2	268.7	268.6	268.6	268.5	3.3	3.7
5,0°	261.5	258.9	256.5	253.9	251.4	249.4	247.6	246.1	245.0	244.4	244.3	6.5	10.2
7,5°	244.8	238.5	232.3	226.9	221.6	217.2	213.5	210.6	208.6	207.3	206.8	9.4	19.6
10,0°	221.4	211.9	203.1	194.5	186.1	179.5	174.5	171.0	168.5	167.1	166.7	12.0	31.6
12,5°	195.0	181.2	169.8	160.0	151.3	144.4	138.5	134.0	131.0	128.9	128.4	14.2	45.8
15,0°	167.9	153.5	140.2	128.2	117.7	109.1	102.7	98.6	95.9	94.7	94.3	16.3	62.0
17,5°	142.2	124.6	108.6	95.7	87.6	83.9	83.1	83.8	84.7	85.5	85.9	18.4	80.4
20,0°	116.6	96.4	83.1	78.2	78.6	81.3	84.5	87.3	89.3	90.3	90.9	20.8	101.2
22,5°	89.5	75.2	72.6	76.0	80.9	85.1	88.4	90.5	91.6	91.8	92.2	23.2	124.4
25,0°	71.4	68.6	73.3	79.7	85.5	88.8	90.0	89.7	88.7	87.4	87.1	25.6	150.0
27,5°	64.7	70.1	78.6	86.0	89.6	90.0	87.9	84.8	81.5	78.7	77.4	28.0	178.0
30,0°	64.8	74.0	83.0	87.6	87.7	84.1	78.9	73.3	68.2	64.5	62.9	30.3	208.3
32,5°	67.5	77.3	83.7	84.9	81.4	75.6	69.2	63.0	57.6	53.9	52.5	32.7	241.0
35,0°	69.5	77.5	81.3	79.5	74.6	69.1	63.6	59.6	56.8	55.4	54.7	35.2	276.2
37,5°	66.9	72.0	72.9	70.1	66.3	64.1	63.0	61.0	57.8	55.1	54.2	37.4	313.5
40,0°	61.1	63.3	62.3	60.6	62.2	62.0	58.2	55.0	53.0	51.5	51.0	39.1	352.7
42,5°	56.2	56.2	55.5	58.5	59.0	54.9	52.9	51.4	50.1	49.0	48.4	40.8	393.5
45,0°	53.0	52.6	55.5	57.6	52.9	50.7	49.0	47.7	46.7	46.0	45.7	42.7	436.2
47,5°	51.0	53.0	57.0	52.2	48.3	46.4	45.0	44.0	43.2	42.7	42.6	45.2	481.4
50,0°	50.3	54.8	53.7	46.7	43.9	42.3	41.2	40.5	39.8	39.4	39.2	48.5	529.9
52,5°	49.2	54.1	48.4	42.2	39.7	38.5	37.5	36.4	35.8	35.3	35.3	52.1	582.0
55,0°	47.2	51.3	42.8	37.7	35.7	34.3	33.3	32.8	32.2	31.9	31.9	53.0	634.9
57,5°	46.8	46.6	37.7	33.1	31.7	30.7	29.9	29.5	29.0	28.8	28.8	50.6	685.5
60,0°	45.6	41.7	32.2	29.5	28.5	27.6	26.4	25.5	24.7	24.2	24.2	46.4	731.9
62,5°	43.5	35.8	28.2	26.2	24.8	23.3	21.9	20.9	20.2	19.7	19.8	41.6	773.6
65,0°	39.3	31.9	24.7	22.4	20.8	19.0	17.8	17.1	16.4	16.2	16.2	38.9	812.4
67,5°	35.7	27.6	20.9	18.1	16.8	15.5	14.4	13.8	13.5	13.3	13.3	40.2	852.7
70,0°	31.4	23.6	17.7	15.1	13.8	12.3	11.5	10.8	10.3	9.9	9.7	49.7	902.3
72,5°	26.8	19.7	14.6	12.0	10.5	9.1	8.2	7.7	7.3	6.8	6.8	52.1	954.4
75,0°	22.1	15.8	11.6	9.2	7.7	6.8	5.8	5.3	4.8	4.6	4.6	30.6	985.0
77,5°	16.3	11.4	8.2	6.4	5.3	4.4	3.7	3.1	2.9	2.7	2.7	10.4	995.4
80,0°	9.8	6.7	5.0	4.0	3.1	2.5	2.1	1.7	1.3	1.0	1.0	2.9	998.4
82,5°	4.5	3.5	2.8	2.1	1.6	1.3	1.1	1.0	0.7	0.6	0.5	1.0	999.3
85,0°	1.9	1.7	1.5	1.1	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.4	999.8
87,5°	1.2	1.1	0.8	0.8	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	8210	70.9	75.1	73.0
95	241	252	7790	65.9	69.9	67.9
90	229	250	7402	61.6	65.2	63.4
85	216	248	6982	57.1	60.5	58.8
80	203	246	6562	52.8	55.8	54.3
75	190	243	6141	48.7	51.5	50.1
70	178	241	5753	45.0	47.5	46.2
65	165	238	5333	41.1	43.5	42.3
60	152	235	4913	37.4	39.5	38.4
55	140	232	4525	34.2	36.0	35.1
50	127	229	4105	30.7	32.3	31.5
45	114	225	3685	27.5	28.8	28.2
40	102	221	3297	24.4	25.6	25.0
35	89	216	2877	21.2	22.3	21.8
30	76	210	2457	18.2	19.1	18.6
25	63	203	2036	15.3	16.0	15.6
20	51	195	1648	12.7	13.3	13.0
15	38	184	1228	9.9	10.3	10.1
11	27	172	873	7.8	8.0	7.9

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	8210	68.9	71.9	70.4
95	241	252	7790	64.4	67.1	65.8
90	229	250	7402	60.3	62.9	61.6
85	216	248	6982	56.1	58.4	57.2
80	203	246	6562	52.0	54.1	53.0
75	190	243	6142	48.0	50.0	49.0
70	178	241	5754	44.4	46.3	45.3
65	165	238	5333	40.8	42.4	41.6
60	152	235	4913	37.2	38.6	37.9
55	140	232	4525	33.9	35.3	34.6
50	127	229	4105	30.6	31.8	31.2
45	114	225	3685	27.3	28.3	27.8
40	102	221	3297	24.4	25.3	24.8
35	89	216	2877	21.2	22.1	21.6
30	76	210	2457	18.2	18.9	18.5
25	63	203	2036	15.4	15.9	15.6
20	51	195	1649	12.7	13.2	13.0
15	38	184	1228	9.9	10.2	10.0
11	27	172	873	8.0	8.1	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	8210	69.7	72.8	71.2
95	241	252	7790	65.0	67.8	66.4
90	229	250	7402	60.8	63.5	62.2
85	216	248	6981	56.5	58.8	57.6
80	203	246	6561	52.4	54.4	53.4
75	191	244	6173	48.6	50.6	49.6
70	178	241	5753	44.6	46.4	45.5
65	165	238	5333	40.9	42.5	41.7
60	152	235	4913	37.3	38.7	38.0
55	140	232	4525	34.0	35.3	34.6
50	127	229	4105	30.6	31.8	31.2
45	114	225	3685	27.3	28.3	27.8
40	102	221	3297	24.3	25.2	24.8
35	89	216	2877	21.2	22.0	21.6
30	76	210	2456	18.2	18.8	18.5
25	64	204	2069	15.6	16.1	15.8
20	51	195	1648	12.7	13.1	12.9
15	38	184	1228	10.0	10.2	10.1
11	27	172	873	7.9	8.0	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31G08HB EAN: 4069025149282	LP number 59535_318
--	--	--------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	8210.0	70.9
5.0	8210.0	68.9
15.0	8210.0	69.7