


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
	Version post-top or side-entry mounting, Smart Interface up Optic asymmetric, extremely wide distribution (P0.8a G), Back Light Control (BLC) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 9740 lm Power consumption = 72.5 W Luminous efficacy = 134.3 lm/W	serial documentation 18.01.2024



Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 802 cd/klm**

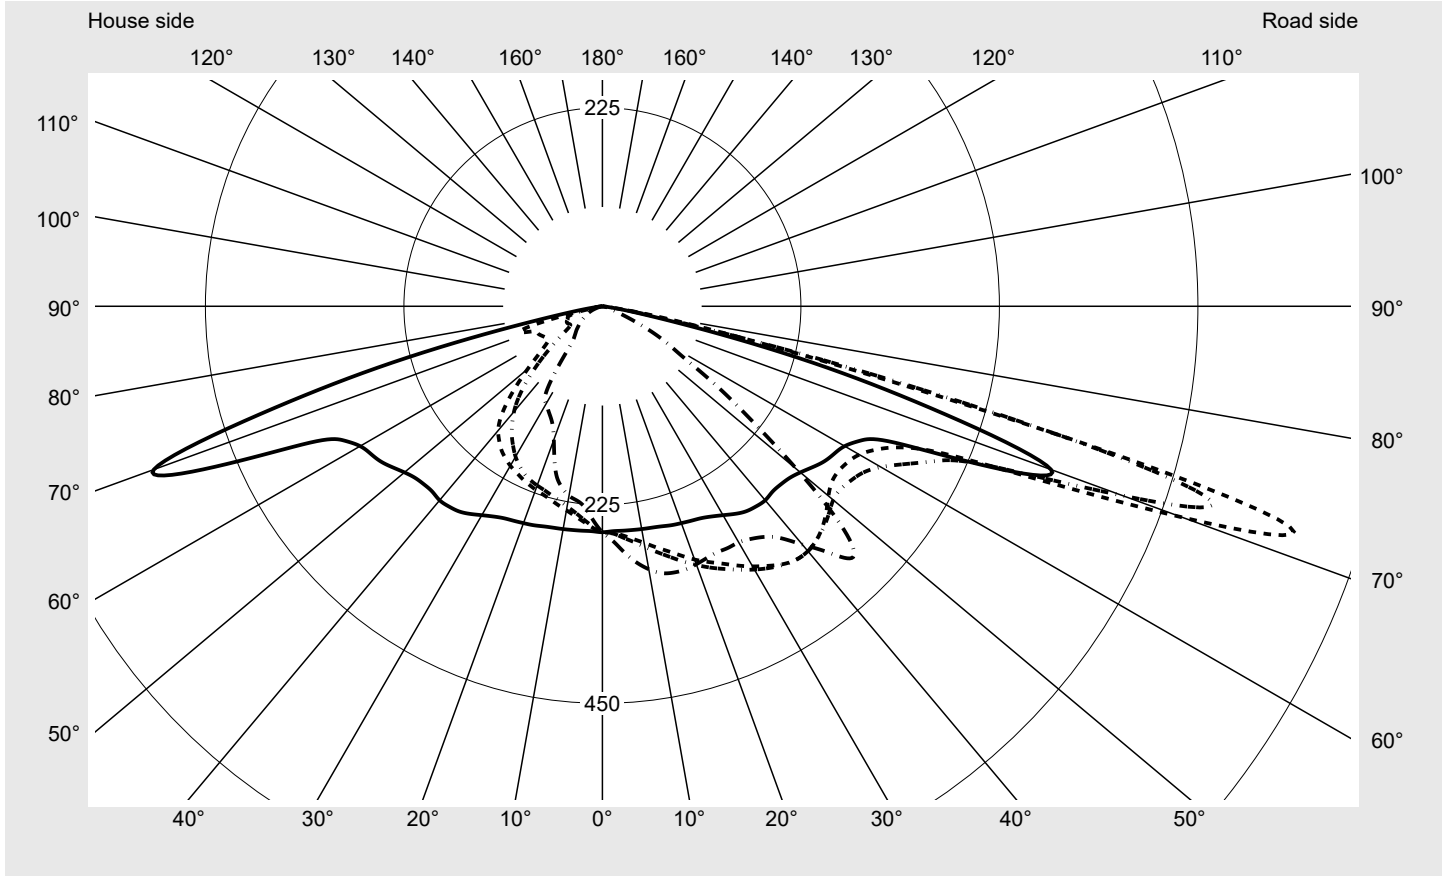

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	699.8
Imax 80°	48.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
--	--	-----------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

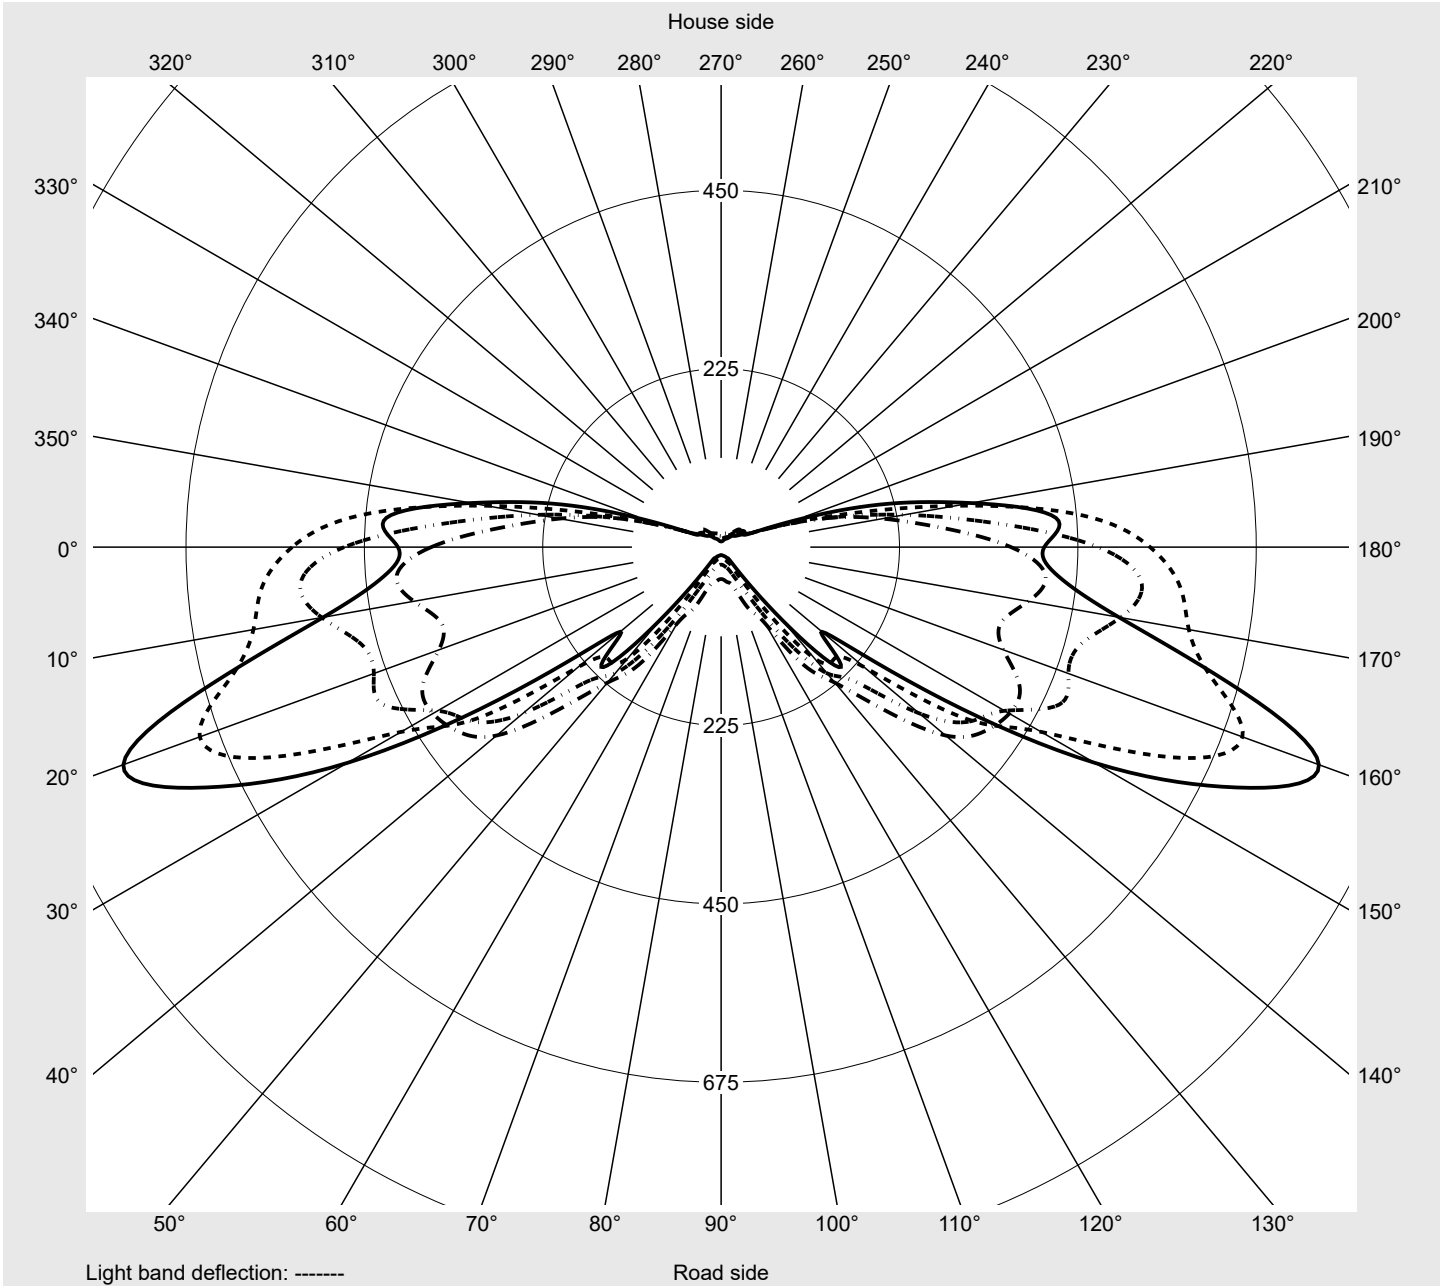

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1
2,5°	255.3	255.8	256.2	256.7	257.1	257.7	258.2	259.1	260.2	260.9	261.9	262.7	263.5
5,0°	255.4	256.0	256.7	258.2	260.6	263.0	265.0	267.2	269.2	270.8	272.6	274.1	275.5
7,5°	255.8	256.5	258.8	262.3	266.0	269.3	272.5	275.5	278.7	281.2	283.2	285.3	287.1
10,0°	256.4	258.2	262.5	267.4	272.2	277.0	280.9	284.5	288.5	291.7	293.9	296.0	297.8
12,5°	257.1	260.9	266.8	273.2	279.7	285.3	290.3	294.6	298.1	301.2	303.7	305.6	306.7
15,0°	258.3	264.2	271.8	280.0	287.4	293.9	299.5	303.5	306.9	309.1	310.8	311.9	312.4
17,5°	260.2	268.3	277.9	287.3	296.2	303.2	308.2	312.5	314.9	316.4	317.2	317.3	316.9
20,0°	261.6	272.9	284.4	295.3	305.5	312.0	317.0	319.8	321.2	321.9	321.7	320.7	318.8
22,5°	263.1	277.0	290.3	303.3	313.7	320.7	324.6	326.8	327.1	326.4	324.8	322.4	319.7
25,0°	265.0	281.9	297.1	311.8	321.9	328.6	332.3	333.7	333.0	330.6	327.4	324.0	320.7
27,5°	268.6	288.3	306.1	321.3	331.3	336.7	339.1	339.5	337.5	333.9	329.6	324.8	321.6
30,0°	273.4	296.2	316.3	331.6	340.5	344.6	345.4	344.5	341.6	337.2	332.0	327.5	323.8
32,5°	279.0	304.5	326.5	341.2	348.9	351.8	351.2	348.6	344.6	339.9	335.3	331.3	328.2
35,0°	283.7	312.2	336.3	351.1	356.8	357.7	355.9	351.8	347.5	343.8	340.9	338.8	336.1
37,5°	286.0	316.7	341.7	356.3	361.7	361.7	358.7	354.3	350.4	348.5	348.6	348.6	346.9
40,0°	287.0	320.2	345.2	358.6	362.5	362.3	359.1	356.2	355.0	355.8	360.4	364.2	362.1
42,5°	285.2	320.5	345.2	356.6	359.3	359.4	357.7	358.0	360.8	366.6	375.3	381.6	382.2
45,0°	285.7	320.8	343.5	351.3	353.0	354.6	355.8	360.2	369.0	380.9	393.4	402.6	408.6
47,5°	288.0	322.1	341.1	344.6	344.3	348.1	356.0	368.0	382.4	400.3	415.5	427.5	433.5
50,0°	292.9	325.0	338.7	336.5	334.5	341.6	358.1	378.1	396.9	417.8	434.4	441.6	427.3
52,5°	299.8	329.7	337.4	330.5	327.7	340.5	363.0	389.7	411.7	431.2	433.9	412.3	374.4
55,0°	306.7	334.2	337.1	326.9	326.4	344.1	371.1	403.3	424.1	433.0	402.1	355.6	306.8
57,5°	311.3	338.1	337.2	325.8	329.4	350.7	382.2	417.7	428.2	420.6	361.9	294.3	250.8
60,0°	317.1	344.9	339.9	328.5	336.3	364.5	398.6	425.7	422.2	393.2	312.0	249.9	207.3
62,5°	329.8	361.2	352.4	337.4	351.3	387.3	415.1	423.8	402.5	347.1	258.8	209.0	152.8
65,0°	365.7	410.8	393.4	366.1	378.8	415.5	419.8	405.2	369.7	289.8	223.3	181.2	111.5
67,5°	475.5	532.7	511.4	470.6	466.2	470.3	412.9	383.3	326.1	240.4	207.7	145.1	77.1
70,0°	541.1	581.5	599.1	641.5	699.8	627.4	466.2	377.8	235.4	200.6	183.3	93.1	32.6
72,5°	407.6	427.6	509.6	664.1	802.4	717.3	544.2	314.9	166.3	213.7	120.9	30.9	16.2
75,0°	246.2	264.5	277.6	328.6	402.1	429.8	318.1	215.1	231.4	176.6	43.4	14.0	11.6
77,5°	93.3	138.1	128.7	130.6	145.2	140.9	88.4	120.4	200.4	113.6	14.2	10.2	8.3
80,0°	29.0	40.6	45.8	48.4	48.9	39.2	14.5	19.3	31.3	15.5	8.5	6.2	5.1
82,5°	7.0	8.7	10.9	12.4	6.5	13.3	5.2	3.5	4.0	2.8	2.9	2.7	2.5
85,0°	2.5	2.4	2.2	2.0	2.0	2.0	1.6	1.5	1.3	1.3	1.3	1.0	1.0
87,5°	1.3	1.3	1.3	1.1	1.0	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1
2,5°	264.1	264.7	265.0	265.5	265.8	266.0	254.1	252.7	252.0	251.3	249.9	248.7	247.5
5,0°	276.5	277.4	278.2	279.0	279.4	279.6	252.9	250.3	247.5	245.1	242.6	240.3	238.0
7,5°	288.6	289.8	290.7	291.5	292.1	292.5	252.2	247.5	243.3	239.7	235.8	232.7	230.1
10,0°	299.2	300.1	301.2	302.0	302.6	302.6	251.6	245.2	239.6	234.8	230.3	226.7	224.1
12,5°	307.5	308.1	308.7	309.4	309.6	309.8	251.8	243.7	236.5	230.9	225.4	222.3	220.0
15,0°	312.3	312.0	312.2	312.5	312.5	312.5	252.3	242.2	234.1	226.9	221.9	218.5	216.3
17,5°	315.9	314.3	313.4	313.1	312.8	312.9	252.5	240.7	231.1	223.7	218.6	215.3	212.6
20,0°	316.9	314.9	313.3	311.8	311.3	311.2	252.9	239.7	228.7	221.2	216.2	212.2	207.6
22,5°	317.2	314.1	311.8	310.2	309.1	308.9	252.5	237.9	226.0	218.4	213.4	208.2	200.7
25,0°	317.2	314.4	311.8	309.4	307.8	307.7	252.2	235.8	223.1	215.4	209.5	201.4	194.1
27,5°	318.6	315.5	312.6	310.2	308.7	308.7	252.3	234.2	220.7	211.9	203.6	193.1	183.9
30,0°	320.9	318.1	314.3	311.1	309.3	308.9	254.6	234.1	218.7	208.7	196.9	183.9	171.6
32,5°	325.2	322.1	318.3	315.3	313.4	312.7	256.0	233.4	216.4	204.3	188.2	171.8	154.5
35,0°	333.0	329.2	325.4	322.1	319.9	319.2	258.1	233.4	214.1	199.3	179.0	157.4	134.1
37,5°	343.1	339.8	336.7	333.6	331.9	331.1	256.3	230.9	210.2	192.2	168.0	141.7	114.8
40,0°	360.0	358.4	357.7	354.8	353.2	352.5	254.2	226.4	204.5	183.7	155.9	124.9	99.4
42,5°	383.8	385.0	385.3	381.7	379.0	378.1	249.1	218.4	193.8	170.3	140.9	110.7	86.3
45,0°	412.5	413.9	412.7	407.8	403.4	402.0	244.4	208.8	179.6	151.5	122.7	97.5	74.3
47,5°	431.9	419.1	401.0	382.9	370.4	366.1	243.2	201.6	166.1	130.5	103.5	85.3	64.9
50,0°	396.5	359.5	329.9	307.1	292.2	288.0	247.0	199.5	154.8	110.5	84.9	72.4	57.4
52,5°	326.1	280.0	250.8	231.5	218.8	215.0	251.4	198.7	147.9	93.2	68.1	60.2	52.1
55,0°	257.8	216.1	191.0	175.0	163.6	160.6	257.4	200.1	143.2	80.9	54.9	50.5	49.7
57,5°	209.3	172.2	145.8	127.8	116.2	112.4	260.4	199.2	139.4	73.0	45.5	44.0	46.7
60,0°	162.7	129.1	107.8	95.3	88.6	87.0	260.2	198.1	139.8	72.6	42.0	38.5	42.9
62,5°	121.1	93.2	79.2	72.8	66.6	64.1	261.6	198.3	141.4	74.7	43.1	36.4	39.2
65,0°	88.5	62.5	47.9	44.8	41.5	40.3	279.6	207.0	143.0	77.4	44.2	35.7	35.2
67,5°	45.4	31.8	26.8	24.3	22.6	22.2	347.1	234.7	143.9	79.3	43.6	33.8	31.5
70,0°	21.6	17.7	16.0	15.3	14.5	14.2	458.1	300.3	160.0	82.8	41.8	33.2	28.4
72,5°	13.7	12.2	11.3	10.7	10.2	10.0	423.8	320.2	207.5	97.4	41.2	31.7	25.8
75,0°	10.1	9.0	8.1	7.7	7.2	7.2	209.9	193.5	168.4	77.5	35.6	28.6	23.1
77,5°	7.0	6.1	5.4	5.1	4.7	4.6	67.8	68.8	55.1	23.2	21.9	22.0	18.9
80,0°	4.1	3.7	3.2	2.9	2.8	2.8	19.2	18.9	14.7	9.8	10.9	12.8	12.6
82,5°	2.3	2.1	1.9	1.7	1.6	1.7	5.4	5.0	4.9	5.3	5.5	6.3	6.2
85,0°	1.0	1.0	0.9	0.8	0.8	0.8	2.5	2.6	2.7	2.7	2.7	2.5	2.3
87,5°	0.6	0.5	0.4	0.4	0.4	0.4	1.3	1.5	1.5	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	0.4	0.4
2,5°	246.5	245.9	245.1	244.3	243.7	243.5	243.2	242.8	242.7	242.6	242.6	3.0	3.4
5,0°	235.9	234.5	233.1	231.7	230.7	230.0	229.4	228.9	228.8	228.9	228.8	6.1	9.5
7,5°	227.6	226.1	224.9	223.7	222.9	222.6	222.1	222.1	222.1	222.1	222.1	9.1	18.6
10,0°	222.0	220.7	219.9	219.3	218.8	218.6	218.4	218.3	218.2	218.1	218.1	12.2	30.8
12,5°	218.2	217.1	216.1	215.2	214.2	213.1	211.9	211.4	211.0	210.6	210.7	15.3	46.1
15,0°	214.8	212.9	210.8	208.0	205.7	204.0	202.3	201.1	200.4	200.0	199.9	18.3	64.4
17,5°	209.5	205.5	202.2	199.0	195.7	192.5	188.9	185.6	183.2	181.5	180.9	21.2	85.6
20,0°	202.1	198.0	193.3	188.5	182.0	175.6	170.1	166.1	163.3	161.6	161.0	23.8	109.5
22,5°	194.9	188.8	182.1	173.1	165.0	158.5	153.6	150.5	148.6	147.4	147.0	26.4	135.8
25,0°	186.5	177.8	167.1	157.6	150.1	145.3	142.3	140.5	139.5	138.9	138.8	28.9	164.7
27,5°	174.2	161.1	149.5	141.3	136.2	133.3	132.5	132.7	132.9	132.8	132.9	31.3	196.0
30,0°	156.2	142.0	131.9	125.7	123.8	123.9	124.9	126.0	126.9	127.3	127.5	33.6	229.6
32,5°	135.4	121.4	112.6	109.8	110.7	114.2	118.5	121.7	121.8	121.3	121.0	35.8	265.4
35,0°	114.0	99.7	92.6	93.1	99.5	105.7	107.7	106.6	103.5	100.4	99.0	37.8	303.2
37,5°	94.9	80.9	76.9	81.3	86.7	87.6	84.6	80.5	76.5	73.4	72.1	39.4	342.6
40,0°	79.0	67.7	66.9	70.7	70.9	68.6	66.0	62.0	57.9	55.1	54.0	41.4	383.9
42,5°	67.7	60.7	61.9	61.8	61.0	59.2	55.0	51.3	49.1	47.7	47.2	43.6	427.6
45,0°	60.1	58.1	57.9	56.8	55.7	51.4	47.8	45.6	44.2	43.4	43.1	46.0	473.6
47,5°	56.2	56.3	54.5	54.0	50.0	45.6	43.0	41.3	40.4	39.9	39.7	47.5	521.1
50,0°	54.3	53.5	52.3	49.5	44.0	40.7	38.7	37.2	36.5	36.0	35.9	46.9	568.0
52,5°	53.7	50.6	49.0	44.4	39.0	36.3	34.6	33.7	33.1	32.8	32.8	45.3	613.2
55,0°	52.1	46.9	44.8	38.9	34.5	32.5	31.1	30.3	29.8	29.5	29.6	43.5	656.8
57,5°	46.5	42.6	39.5	33.8	30.7	28.8	27.2	26.5	26.2	25.9	26.0	41.9	698.7
60,0°	41.1	38.6	35.1	29.5	26.9	25.3	24.1	23.7	23.2	23.0	23.0	40.6	739.3
62,5°	36.4	35.1	30.1	25.4	23.4	22.0	21.3	20.8	20.3	20.1	20.1	39.5	778.8
65,0°	32.6	31.7	25.8	21.6	20.4	19.1	18.5	17.8	17.3	17.0	17.0	39.3	818.1
67,5°	28.8	27.9	22.6	18.5	17.3	16.3	15.5	14.9	14.3	14.0	13.9	42.2	860.3
70,0°	25.5	24.4	19.6	15.9	14.8	13.8	12.9	12.0	11.2	10.8	10.7	47.5	907.8
72,5°	21.9	20.1	16.4	13.5	12.2	10.9	9.5	8.3	7.6	7.2	7.2	45.6	953.4
75,0°	18.4	15.9	13.0	10.7	9.3	8.6	6.7	5.6	5.1	4.8	4.8	28.3	981.6
77,5°	14.5	11.7	9.1	7.2	6.3	6.0	4.2	3.4	2.9	2.7	2.7	12.7	994.3
80,0°	10.2	7.7	5.5	4.4	3.9	3.5	2.5	1.8	1.4	1.1	1.0	3.8	998.2
82,5°	5.4	4.1	3.0	2.3	1.8	1.6	1.3	1.0	0.8	0.6	0.4	1.2	999.3
85,0°	2.1	1.8	1.5	1.2	0.9	0.8	0.6	0.6	0.4	0.4	0.3	0.4	999.8
87,5°	1.1	1.0	0.9	0.8	0.6	0.6	0.5	0.4	0.4	0.3	0.3	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
Dimming levels table		siteco
environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9740	72.5	75.7	74.1
95	241	252	9241	67.9	70.8	69.4
90	229	250	8781	63.8	66.6	65.2
85	216	248	8283	59.5	61.9	60.7
80	203	246	7784	55.3	57.5	56.4
75	190	243	7286	51.2	53.2	52.2
70	178	241	6826	47.4	49.4	48.4
65	165	238	6327	43.5	45.3	44.4
60	152	235	5829	39.7	41.3	40.5
55	140	232	5369	36.3	37.7	37.0
50	127	229	4870	32.7	34.0	33.4
45	114	225	4371	29.2	30.3	29.8
40	102	221	3911	26.0	27.0	26.5
35	89	216	3413	22.6	23.6	23.1
30	76	210	2914	19.5	20.2	19.8
25	63	203	2416	16.3	16.9	16.6
20	51	195	1956	13.4	13.9	13.6
15	38	184	1457	10.4	10.7	10.6
10	25	169	959	7.2	7.4	7.3

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9740	71.2	73.0	72.1
95	241	252	9241	66.9	68.5	67.7
90	229	250	8781	62.9	64.5	63.7
85	216	248	8282	58.7	60.2	59.4
80	203	246	7784	54.7	55.9	55.3
75	191	244	7324	51.0	52.2	51.6
70	178	241	6825	47.1	48.2	47.7
65	165	238	6327	43.3	44.3	43.8
60	152	235	5828	39.6	40.5	40.0
55	140	232	5368	36.2	37.0	36.6
50	127	229	4870	32.6	33.4	33.0
45	114	225	4371	29.2	29.8	29.5
40	102	221	3911	26.0	26.6	26.3
35	89	216	3413	22.7	23.2	23.0
30	76	210	2914	19.5	19.9	19.7
25	64	204	2454	16.6	16.9	16.8
20	51	195	1956	13.5	13.8	13.6
15	38	184	1457	10.5	10.7	10.6
10	25	169	959	7.2	7.3	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
--	--	-----------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9740	71.7	74.8	73.2
95	241	252	9242	67.3	70.1	68.7
90	229	250	8782	63.2	65.8	64.5
85	216	248	8283	59.1	61.4	60.2
80	203	246	7785	54.9	57.0	56.0
75	190	243	7286	50.8	52.8	51.8
70	178	241	6826	47.3	49.1	48.2
65	165	238	6327	43.3	45.1	44.2
60	152	235	5829	39.6	41.1	40.4
55	140	232	5369	36.2	37.6	36.9
50	127	229	4870	32.6	33.8	33.2
45	114	225	4372	29.2	30.2	29.7
40	102	221	3911	26.0	26.9	26.4
35	89	216	3413	22.7	23.5	23.1
30	76	210	2914	19.4	20.1	19.8
25	63	203	2416	16.3	16.9	16.6
20	51	195	1956	13.5	13.9	13.7
15	38	184	1457	10.4	10.7	10.6
10	25	169	959	7.1	7.4	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2R31V08JB EAN: 4069025149428	LP number 59538_9
--	--	------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	9740.0	72.5
5.0	9740.0	71.2
15.0	9740.0	71.7