
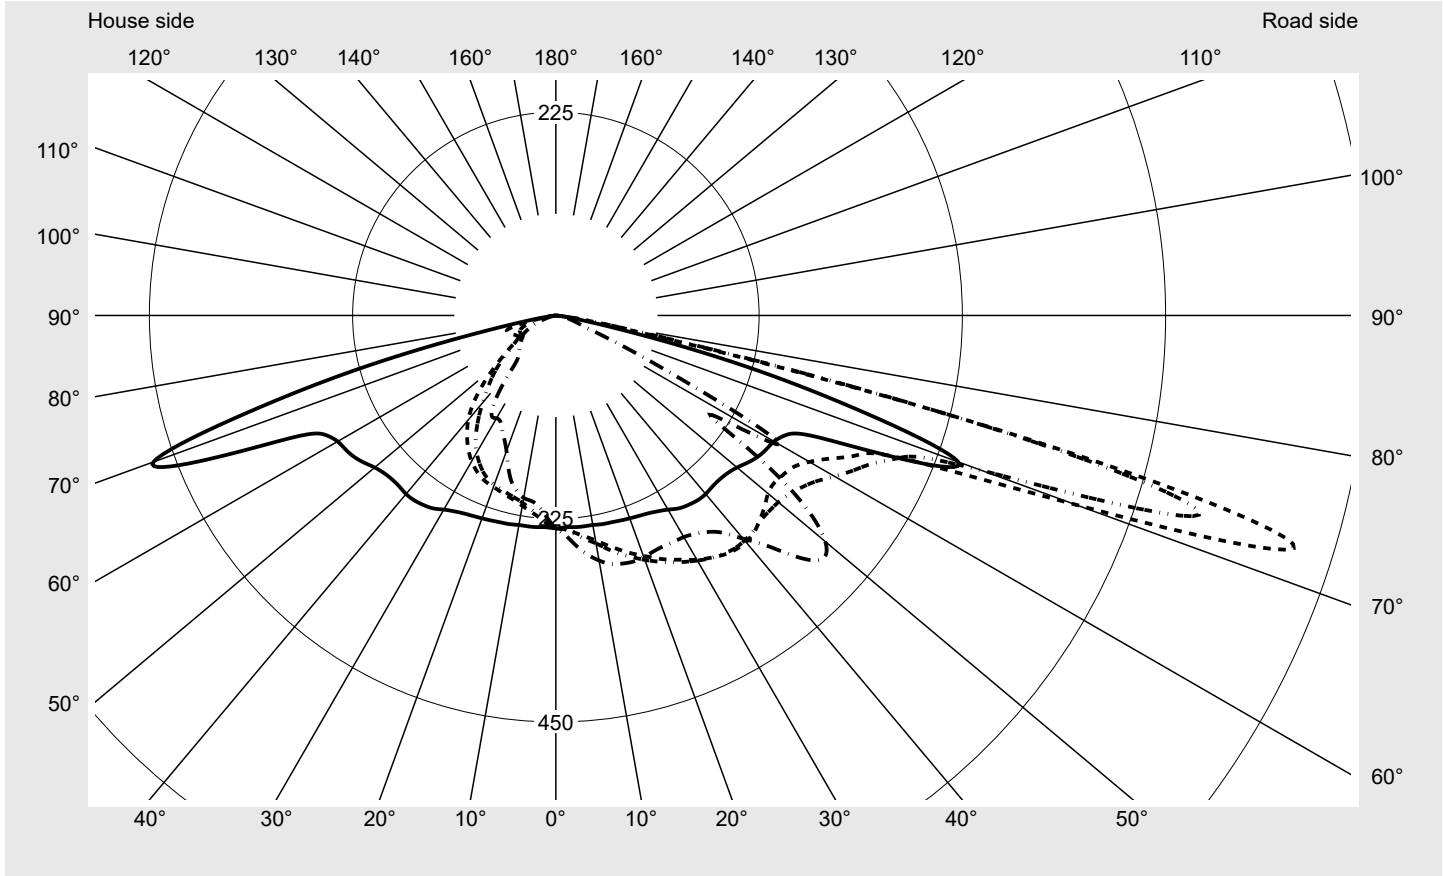


# Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> <b>59537_51</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, extremely wide distribution (P0.8a G) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 10920 lm Power consumption = 71.6 W Luminous efficacy = 152.5 lm/W	<b>serial documentation</b> <b>18.01.2024</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 856 cd/klm**



**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G3
Imax 70°	618.8
Imax 80°	68.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> 59537_51
--	--	------------------------------

**Envelope curve in cd/klm**      **KMK 72.5°**    **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **siteco**

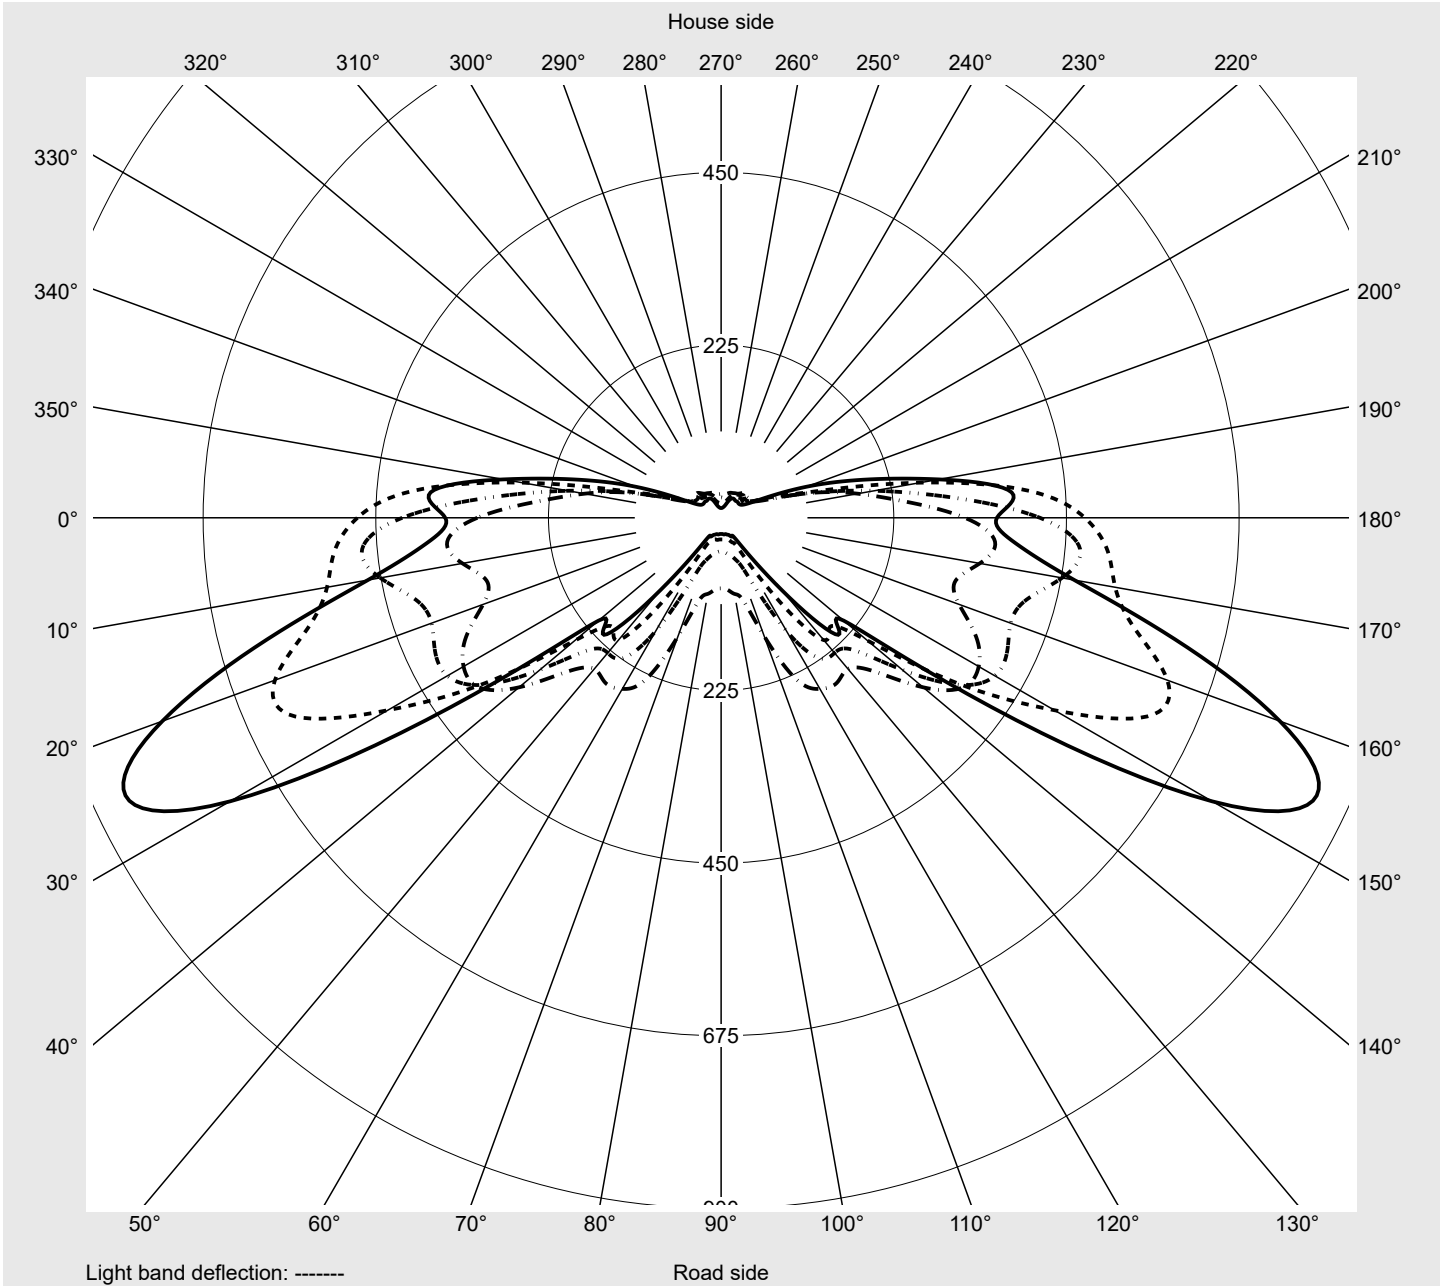

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> <b>59537_51</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	234.7	235.2	235.9	236.3	236.6	236.6	237.1	238.2	239.1	239.6	240.2	240.8	241.4
5,0°	235.2	235.6	236.3	237.6	239.5	241.3	243.0	244.7	246.6	248.1	249.5	251.0	252.0
7,5°	235.5	236.3	238.0	240.8	243.9	246.8	249.7	252.2	254.9	256.9	258.9	260.6	262.1
10,0°	235.5	236.9	240.3	244.4	248.7	252.8	256.3	259.5	262.8	265.6	267.6	269.4	270.9
12,5°	236.6	239.6	244.5	249.8	255.3	260.4	264.8	268.6	271.6	274.3	276.7	278.4	279.6
15,0°	237.1	242.1	248.6	255.9	262.4	268.1	272.9	276.0	279.3	281.8	283.4	284.4	285.0
17,5°	238.0	245.1	253.5	262.0	269.7	275.9	280.4	284.2	286.5	288.0	288.8	288.8	288.4
20,0°	239.0	248.9	259.1	268.7	277.4	283.1	288.0	290.8	292.2	293.0	292.9	292.1	290.8
22,5°	240.2	252.1	264.0	275.5	284.7	291.0	294.8	297.0	297.3	297.0	295.8	293.9	291.9
25,0°	241.7	256.4	269.7	282.6	291.9	298.2	301.4	303.0	302.4	300.4	297.9	295.3	292.3
27,5°	244.4	261.7	277.2	290.5	299.8	304.8	307.5	308.4	306.8	303.6	299.8	296.2	293.4
30,0°	248.2	267.9	285.5	299.1	307.5	312.2	313.2	312.7	310.3	306.3	302.1	298.3	295.0
32,5°	253.2	275.1	294.8	308.3	315.3	318.1	318.6	316.5	312.9	309.0	305.2	301.4	299.1
35,0°	256.0	280.7	302.4	316.0	321.9	323.5	322.2	319.1	315.4	312.5	309.8	307.8	305.7
37,5°	257.8	284.8	307.2	321.0	325.8	326.7	325.1	321.5	317.8	316.2	316.4	317.1	315.6
40,0°	258.0	287.5	310.2	322.7	326.9	327.3	325.0	322.7	322.1	322.8	327.0	330.8	329.2
42,5°	256.7	287.7	310.0	321.3	324.3	325.0	323.6	324.2	327.6	332.7	340.5	346.4	346.9
45,0°	256.6	288.1	308.0	315.7	318.1	319.6	320.7	326.4	335.0	346.1	357.7	365.7	371.4
47,5°	258.2	288.9	305.8	309.5	309.7	313.4	320.5	332.2	346.1	362.6	377.2	387.9	396.1
50,0°	261.8	290.2	302.3	301.0	300.0	306.7	321.5	340.0	358.4	378.5	396.1	408.8	416.2
52,5°	267.6	293.4	300.8	295.4	293.1	304.6	325.3	350.3	370.6	391.3	406.9	415.8	411.4
55,0°	272.8	296.9	299.8	291.5	291.2	307.3	331.9	362.0	382.3	398.0	404.3	399.0	374.0
57,5°	276.0	299.2	298.8	289.2	292.4	312.1	341.7	374.1	390.1	391.8	379.5	349.4	309.6
60,0°	279.0	303.6	299.5	289.6	297.1	324.2	356.3	384.7	389.5	368.9	333.7	295.4	269.7
62,5°	286.9	315.3	307.8	295.1	308.6	343.0	371.4	388.3	374.0	327.5	286.9	271.6	282.6
65,0°	317.6	358.3	342.3	316.4	330.0	366.6	387.6	385.2	343.7	283.6	257.0	262.7	257.4
67,5°	415.5	469.6	451.1	412.1	401.5	411.4	411.9	379.6	308.1	243.4	229.9	223.3	170.3
70,0°	474.0	505.9	521.5	558.0	618.8	612.6	501.5	376.0	249.0	200.9	208.1	134.9	52.2
72,5°	359.4	385.8	467.5	612.6	774.9	856.4	739.2	430.1	208.5	215.7	123.1	38.5	28.0
75,0°	217.0	235.1	244.0	284.5	439.0	598.5	574.8	446.3	365.7	173.9	47.3	23.6	20.9
77,5°	84.6	127.6	114.0	114.9	138.6	182.9	201.9	296.7	316.9	127.3	20.5	18.5	15.7
80,0°	25.9	36.3	41.1	42.9	45.7	50.6	56.5	68.3	62.6	24.9	14.8	12.0	10.8
82,5°	6.9	8.1	10.0	11.8	13.7	15.5	15.0	11.3	10.2	7.8	6.8	7.0	6.3
85,0°	2.5	2.4	2.2	2.1	2.3	2.4	2.6	2.2	2.1	2.1	2.8	2.6	3.0
87,5°	1.3	1.2	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> <b>59537_51</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	242.1	242.7	242.9	243.3	243.6	243.6	233.9	232.6	232.1	231.5	230.4	229.4	228.4
5,0°	253.1	253.8	254.4	255.1	255.4	255.6	232.8	230.9	228.4	226.2	223.7	221.9	220.0
7,5°	263.4	264.5	265.3	266.1	266.5	266.8	232.3	228.5	224.9	221.8	218.5	216.0	213.6
10,0°	272.2	273.3	274.4	274.8	275.3	275.4	231.7	226.3	221.9	217.7	213.9	210.7	208.5
12,5°	280.0	280.4	281.1	281.0	281.6	281.7	231.8	225.0	219.1	214.2	210.0	207.1	205.4
15,0°	284.9	284.8	284.7	284.5	284.6	284.3	231.7	223.6	216.8	211.0	206.9	204.3	202.7
17,5°	287.8	286.8	286.2	285.8	285.7	285.6	231.9	222.1	214.2	208.2	204.3	201.6	199.7
20,0°	289.1	287.5	286.1	285.1	284.6	284.7	232.2	220.9	211.9	205.8	202.1	199.5	195.9
22,5°	289.6	286.9	284.9	283.4	282.6	282.7	231.3	219.0	209.4	203.8	200.0	196.1	190.4
25,0°	289.7	287.1	284.7	282.7	281.6	281.8	230.9	217.2	207.0	201.2	197.0	190.8	184.6
27,5°	290.7	288.1	285.3	283.5	282.2	282.4	231.0	215.8	204.8	198.3	192.1	183.6	175.8
30,0°	292.7	290.3	287.4	284.9	283.3	283.3	231.9	215.2	203.1	195.6	186.4	175.5	165.7
32,5°	296.9	294.2	290.9	288.1	286.8	286.7	233.9	215.1	201.6	192.3	179.1	165.3	151.3
35,0°	303.7	300.3	297.0	294.1	292.8	292.6	234.2	214.0	199.0	187.8	170.8	152.9	133.6
37,5°	312.8	310.0	307.3	304.8	303.4	303.2	232.9	211.7	195.9	181.7	161.4	139.5	117.8
40,0°	327.4	326.6	326.1	323.7	322.3	322.6	230.5	207.6	190.1	173.9	150.8	126.1	104.7
42,5°	348.4	350.5	351.2	347.7	345.8	345.6	225.6	199.9	180.2	161.5	137.5	113.5	93.3
45,0°	376.2	379.7	381.2	379.7	377.9	378.1	221.9	191.8	167.6	144.8	121.9	102.0	82.5
47,5°	401.7	405.0	405.0	402.3	399.3	399.3	220.2	184.5	154.2	125.7	104.8	91.2	73.0
50,0°	414.0	405.7	397.5	391.6	388.9	389.3	222.4	181.7	144.5	107.3	87.9	79.1	65.2
52,5°	392.1	370.1	354.6	348.1	346.3	348.2	226.1	181.6	137.5	92.3	73.1	67.3	60.3
55,0°	337.6	304.9	283.0	272.8	269.0	270.9	229.7	182.1	133.7	80.5	60.8	58.1	58.1
57,5°	271.5	242.0	225.0	215.8	207.8	205.0	230.4	179.6	129.0	73.2	51.8	51.4	55.3
60,0°	264.0	271.2	273.1	272.9	277.8	285.6	230.7	177.3	127.7	71.4	48.1	45.8	51.3
62,5°	283.7	274.7	259.6	225.0	192.5	183.4	228.9	175.1	126.4	72.1	48.4	43.7	47.7
65,0°	232.6	164.2	111.7	100.7	94.0	92.0	241.4	180.8	126.6	74.4	50.7	43.6	43.9
67,5°	86.7	59.5	51.2	47.7	44.6	43.8	302.9	202.7	126.9	77.2	53.7	43.0	39.8
70,0°	35.6	31.0	29.1	29.3	28.4	28.3	402.8	263.5	138.3	85.7	56.7	39.7	35.3
72,5°	25.1	23.4	22.0	22.1	21.3	21.1	380.0	288.0	191.6	118.1	56.9	34.6	30.1
75,0°	19.2	17.9	16.9	16.8	16.3	16.0	178.4	166.7	153.9	124.4	50.5	28.1	24.5
77,5°	13.8	13.2	12.3	11.9	11.7	11.6	58.4	60.7	56.1	51.7	29.3	20.7	18.3
80,0°	9.4	9.1	8.0	7.4	7.2	7.1	17.6	17.5	18.3	20.2	13.8	11.8	11.5
82,5°	5.4	5.0	4.4	4.2	4.0	3.9	5.6	5.5	5.2	6.9	6.1	6.0	5.6
85,0°	2.4	2.2	1.8	1.7	1.6	1.5	2.6	2.6	2.7	2.7	2.7	2.6	2.4
87,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.5	1.5	1.6	1.5	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> <b>59537_51</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	0.4	0.4
2,5°	227.4	226.8	226.2	225.5	225.0	224.7	224.4	224.1	224.0	223.9	223.9	2.8	3.1
5,0°	218.1	217.3	216.1	214.8	213.9	213.4	213.2	212.8	212.6	212.6	212.5	5.6	8.7
7,5°	211.6	210.3	209.1	208.2	207.6	207.5	207.3	207.2	207.2	207.3	207.2	8.4	17.1
10,0°	207.0	206.1	205.5	205.1	204.9	204.7	204.6	204.9	205.0	205.1	205.0	11.2	28.3
12,5°	204.1	203.5	203.0	202.4	201.7	200.9	200.0	199.6	199.3	199.3	199.1	14.1	42.5
15,0°	201.6	200.3	198.8	196.6	194.9	193.4	192.0	190.9	190.4	190.3	190.1	16.9	59.4
17,5°	197.6	194.5	191.9	189.0	186.6	184.3	181.5	179.0	177.3	175.8	175.4	19.6	79.0
20,0°	191.3	187.9	184.5	181.4	176.1	171.1	166.9	163.7	161.5	160.3	159.8	22.1	101.1
22,5°	185.4	180.9	176.0	169.2	162.6	157.4	153.6	151.3	149.9	149.1	148.8	24.5	125.6
25,0°	178.6	171.8	163.2	156.0	150.1	146.1	143.5	142.0	141.0	140.4	140.3	26.8	152.4
27,5°	168.5	157.6	148.3	141.8	137.3	134.4	133.2	132.8	132.7	132.6	132.8	29.0	181.4
30,0°	153.4	141.7	133.3	127.7	125.4	125.3	126.7	128.6	130.2	131.1	131.4	31.2	212.6
32,5°	135.3	124.0	116.0	113.0	114.6	119.0	124.7	129.0	131.2	131.8	132.0	33.4	246.0
35,0°	117.2	104.7	97.8	98.8	106.1	114.2	119.2	121.3	120.9	119.8	119.3	35.4	281.4
37,5°	100.8	87.9	83.5	88.3	95.8	100.2	101.2	100.7	99.3	97.6	96.9	37.0	318.4
40,0°	86.5	75.2	74.8	79.6	81.5	81.7	80.8	77.9	74.4	72.0	71.1	38.7	357.1
42,5°	75.9	69.2	71.0	71.3	71.3	70.4	67.5	65.1	63.3	62.1	61.6	40.7	397.8
45,0°	68.4	67.4	67.8	67.4	67.1	64.5	62.3	60.7	59.5	58.6	58.2	43.2	441.0
47,5°	64.9	65.9	65.1	65.4	62.7	59.6	58.0	56.9	55.9	55.1	54.7	45.5	486.5
50,0°	63.3	63.8	63.9	61.7	57.5	55.3	54.2	53.1	52.2	51.6	51.4	47.0	533.6
52,5°	63.3	61.9	60.9	57.4	53.5	51.9	50.9	50.0	49.2	48.7	48.7	47.3	580.8
55,0°	61.7	58.2	57.1	52.8	49.6	48.4	47.5	46.8	46.3	46.2	46.3	45.9	626.7
57,5°	55.9	54.2	53.1	48.0	45.6	44.6	44.2	43.6	43.3	43.2	43.3	43.9	670.6
60,0°	50.9	51.2	49.0	43.8	42.0	41.0	41.0	41.3	41.4	41.3	41.4	45.6	716.2
62,5°	47.0	48.1	45.1	40.5	38.9	37.8	37.7	37.0	36.3	36.2	36.6	44.9	761.1
65,0°	43.3	45.0	42.0	38.3	36.9	35.6	34.7	32.8	31.3	30.9	31.2	42.1	803.2
67,5°	39.5	41.3	38.8	36.8	35.8	34.1	30.8	27.7	26.5	26.2	26.5	42.5	845.7
70,0°	35.4	36.0	34.3	34.0	33.6	31.2	25.9	21.9	20.1	19.3	19.1	46.5	892.2
72,5°	29.4	29.7	29.0	29.6	29.0	25.6	19.2	15.4	13.8	12.9	12.7	48.7	940.9
75,0°	23.6	23.4	23.0	23.9	24.0	20.0	13.7	10.2	9.1	8.2	8.1	34.4	975.3
77,5°	17.7	16.7	16.1	17.0	17.6	14.4	8.7	6.1	4.9	4.0	3.8	16.7	992.0
80,0°	11.2	10.2	9.2	9.6	10.6	8.1	5.1	3.3	2.2	1.4	1.2	5.4	997.4
82,5°	5.5	5.0	4.3	4.0	4.7	3.8	2.6	1.8	1.2	0.8	0.7	1.7	999.2
85,0°	2.3	2.1	1.8	1.6	1.5	1.2	1.0	0.8	0.7	0.6	0.5	0.6	999.7
87,5°	1.3	1.2	1.1	1.0	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> 59537_51
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	10920	71.6	74.6	73.1
95	241	252	10361	67.1	69.8	68.4
90	229	250	9845	63.2	65.6	64.4
85	216	248	9286	58.9	61.2	60.0
80	203	246	8727	54.8	56.8	55.8
75	190	243	8169	50.7	52.7	51.7
70	178	241	7653	47.1	48.9	48.0
65	165	238	7094	43.3	44.9	44.1
60	152	235	6535	39.6	41.1	40.4
55	140	232	6019	36.2	37.5	36.8
50	127	229	5460	32.7	33.8	33.2
45	114	225	4901	29.2	30.3	29.8
40	102	221	4385	26.1	27.0	26.6
35	89	216	3826	22.7	23.5	23.1
30	76	210	3267	19.5	20.1	19.8
25	63	203	2709	16.3	16.9	16.6
20	51	195	2193	13.6	14.0	13.8
15	38	184	1634	10.6	10.8	10.7
10	26	171	1118	8.0	8.1	8.0

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	10920	70.3	71.9	71.1
95	241	252	10362	66.0	67.6	66.8
90	229	250	9846	62.2	63.6	62.9
85	216	248	9287	58.1	59.4	58.8
80	203	246	8728	54.2	55.3	54.8
75	190	243	8169	50.3	51.3	50.8
70	178	241	7653	46.7	47.7	47.2
65	165	238	7094	43.0	43.9	43.4
60	152	235	6535	39.4	40.2	39.8
55	140	232	6019	36.0	36.8	36.4
50	127	229	5460	32.7	33.3	33.0
45	114	225	4901	29.1	29.8	29.4
40	102	221	4385	26.1	26.6	26.4
35	89	216	3827	22.7	23.2	23.0
30	76	210	3268	19.5	19.9	19.7
25	63	203	2709	16.4	16.8	16.6
20	51	195	2193	13.7	13.9	13.8
15	38	184	1634	10.7	10.8	10.8
10	26	171	1118	8.0	8.1	8.0

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> 59537_51
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	10920	70.9	73.6	72.2
95	241	252	10361	66.5	69.1	67.8
90	229	250	9845	62.5	65.0	63.8
85	216	248	9286	58.5	60.6	59.6
80	203	246	8727	54.4	56.4	55.4
75	191	244	8211	50.8	52.6	51.7
70	178	241	7652	46.9	48.6	47.8
65	165	238	7093	43.1	44.7	43.9
60	152	235	6534	39.5	40.8	40.2
55	140	232	6019	36.1	37.4	36.8
50	127	229	5460	32.6	33.7	33.2
45	114	225	4901	29.1	30.2	29.6
40	102	221	4385	26.1	27.0	26.6
35	89	216	3826	22.7	23.5	23.1
30	76	210	3267	19.5	20.2	19.8
25	64	204	2751	16.6	17.2	16.9
20	51	195	2192	13.6	14.0	13.8
15	38	184	1634	10.6	10.9	10.8
10	26	171	1118	7.9	8.1	8.0

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2U31G08JB</b> <b>EAN: 4069025149787</b>	<b>LP number</b> <b>59537_51</b>
--	--	-------------------------------------

<b>Luminousfluxs table</b>	<b>siteco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	10920.0	71.6
5.0	10920.0	70.3
15.0	10920.0	70.9