
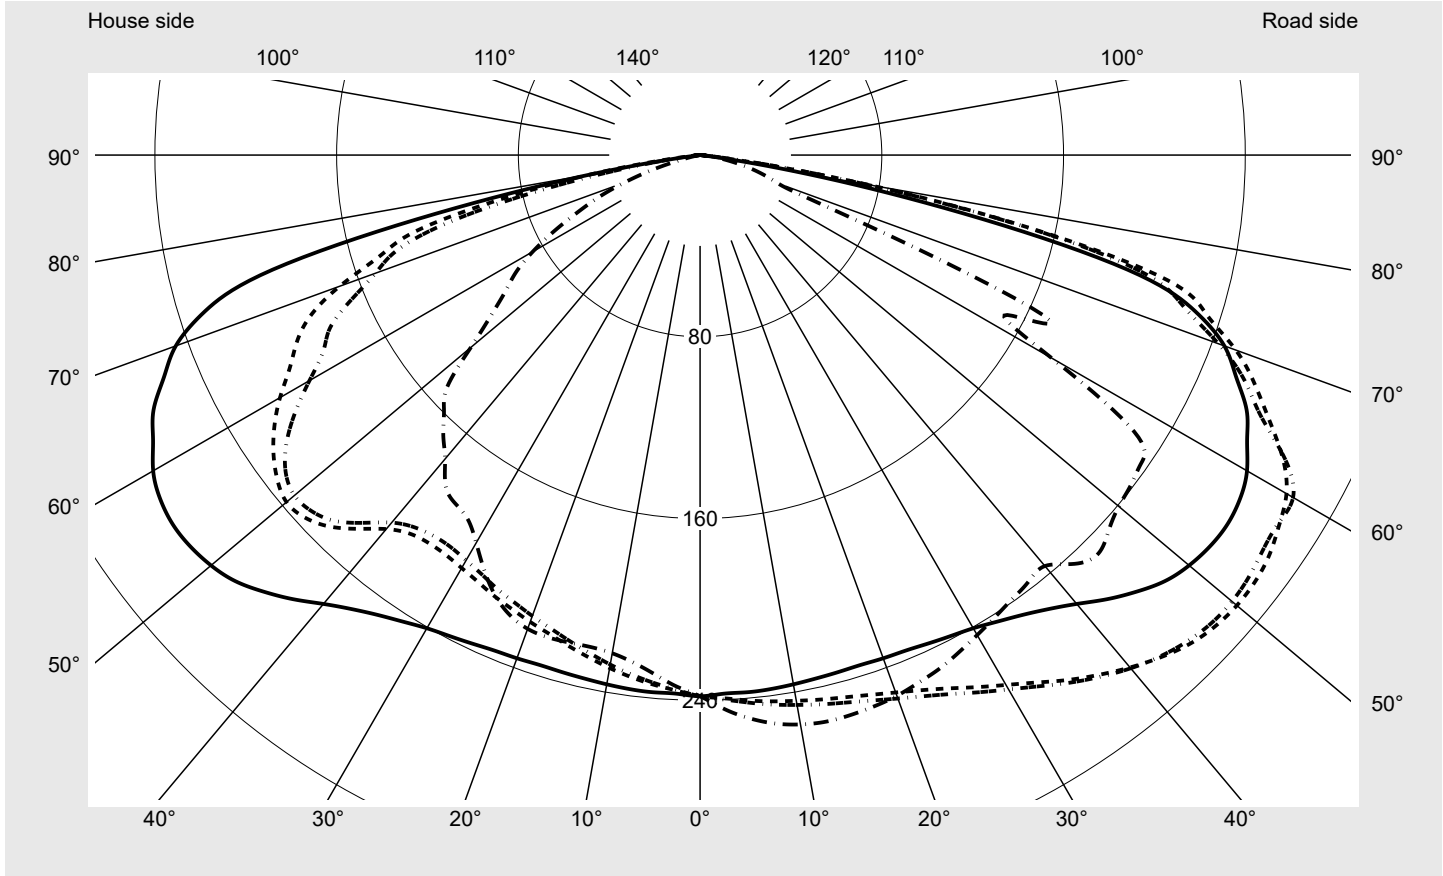


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P0.5a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 10640 lm Power consumption = 71.6 W Luminous efficacy = 148.6 lm/W	serial documentation 18.01.2024



Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 308 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	256.5
Imax 80°	74.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
--	--	------------------------------

Envelope curve in cd/klm **KMK 50°** **KMK 47.5°** **KMK 45°** **KMK 42.5°** **siteco**

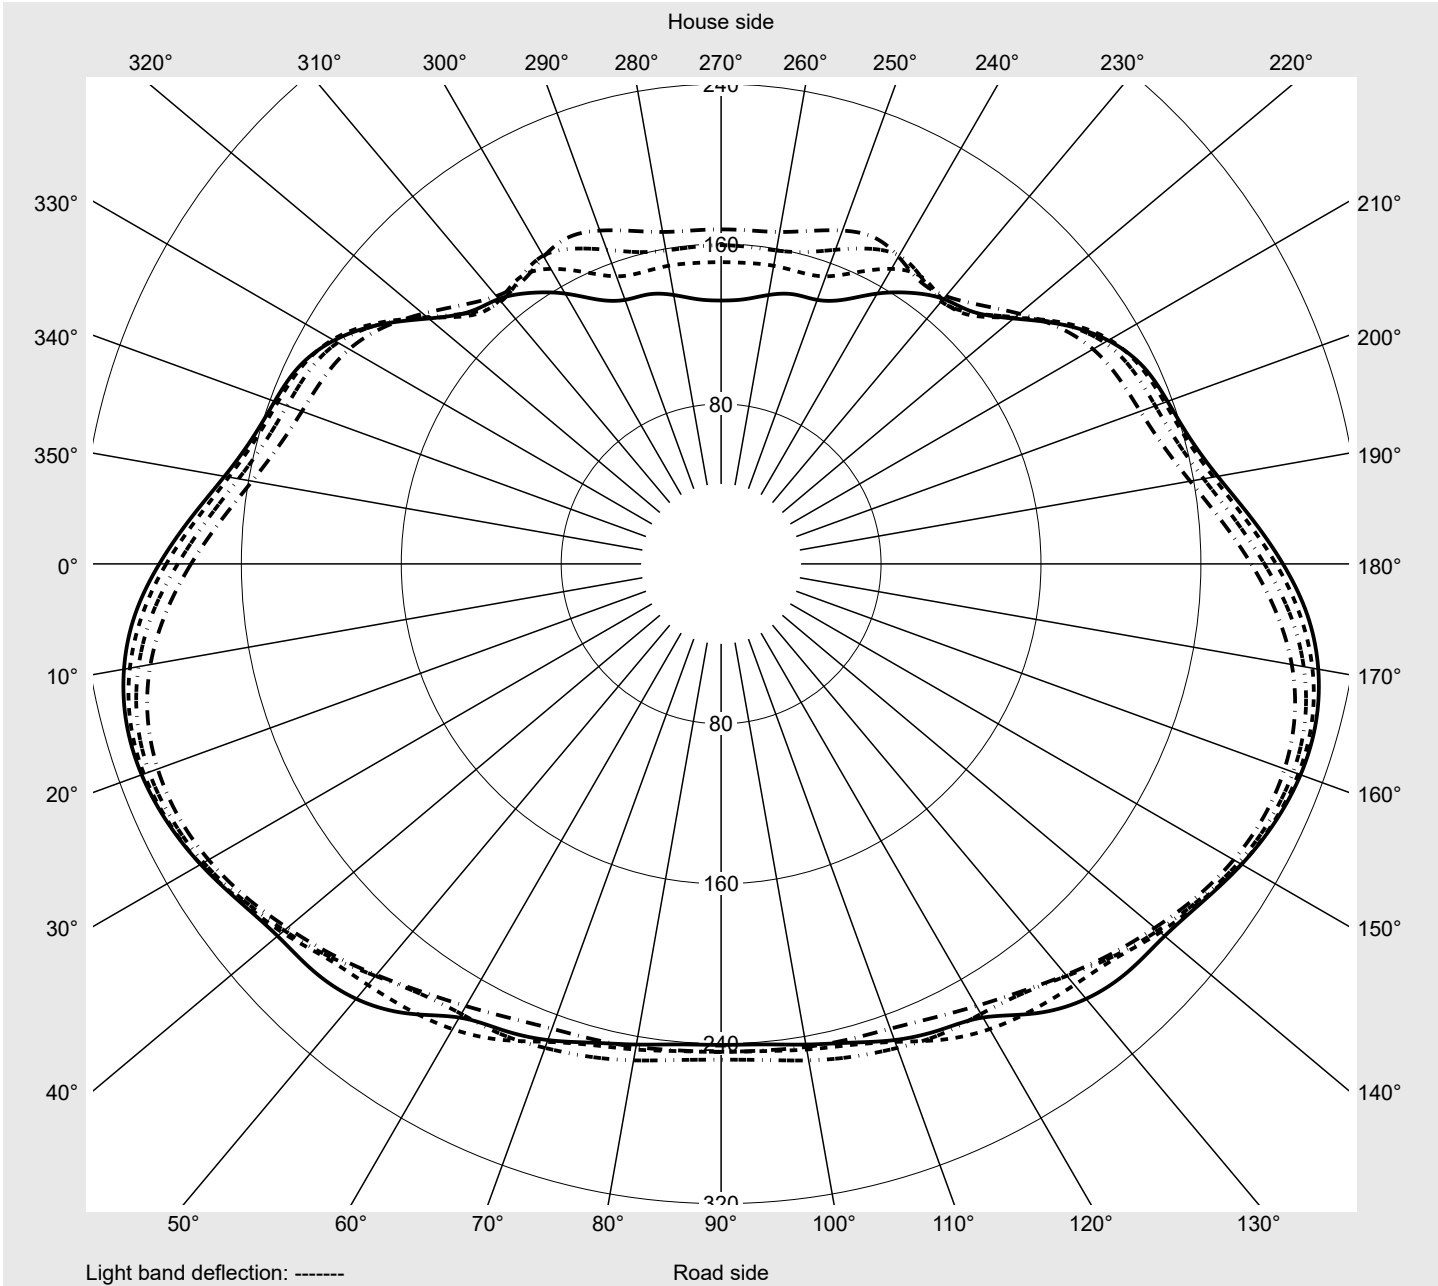

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	237.3	237.5	238.1	238.8	239.3	239.9	240.2	240.7	241.5	241.7	242.0	242.5	242.9
5,0°	237.4	238.0	238.8	239.9	241.0	241.9	242.7	243.5	244.6	245.2	245.8	246.5	247.1
7,5°	237.1	238.2	239.5	241.0	242.5	244.0	245.1	246.2	247.5	248.4	249.3	250.0	250.6
10,0°	236.6	238.2	239.9	241.9	243.9	245.8	247.4	248.6	250.0	251.1	252.0	252.6	253.2
12,5°	236.0	238.3	240.4	243.0	245.5	247.6	249.4	250.9	252.2	253.3	254.1	254.7	255.0
15,0°	235.6	238.5	241.1	244.2	247.1	249.5	251.5	253.1	254.1	255.1	255.8	256.2	256.2
17,5°	235.3	239.0	242.1	245.7	249.2	251.8	253.9	255.5	256.4	257.0	257.4	257.2	256.9
20,0°	235.7	240.1	243.9	248.0	251.8	254.6	256.7	258.1	258.5	258.7	258.6	258.0	257.4
22,5°	236.2	241.5	246.0	250.8	255.0	257.8	259.6	260.5	260.4	260.0	259.4	258.4	257.3
25,0°	237.3	243.5	248.9	254.5	259.0	261.8	262.9	262.9	262.2	261.3	260.2	258.6	257.0
27,5°	238.7	246.0	252.9	259.4	264.0	266.6	267.1	266.4	264.7	262.7	260.7	258.6	256.6
30,0°	240.5	249.4	257.8	264.7	269.3	271.6	271.4	269.9	267.6	264.6	261.5	258.8	256.5
32,5°	243.5	253.9	263.5	270.7	275.3	277.3	276.5	274.3	270.9	266.8	262.8	259.6	256.7
35,0°	247.2	259.5	270.1	277.6	282.1	283.6	282.1	279.0	274.6	269.3	264.8	260.4	256.5
37,5°	251.9	265.3	276.5	284.1	288.4	289.4	287.5	283.6	277.9	271.9	266.1	260.9	256.4
40,0°	257.9	272.0	283.3	290.8	294.5	294.9	292.3	287.5	280.9	274.1	267.3	261.3	255.9
42,5°	265.2	278.8	289.9	297.0	299.9	299.5	296.1	290.4	283.2	275.9	268.4	261.2	255.4
45,0°	271.8	285.6	295.9	302.4	304.5	303.0	298.9	292.4	285.3	277.6	269.0	262.5	260.0
47,5°	277.6	290.6	300.3	305.9	307.3	305.1	300.6	293.5	286.7	279.0	274.9	272.2	268.7
50,0°	281.0	294.4	303.3	308.0	308.5	305.7	300.6	294.3	289.6	288.2	284.0	274.4	262.0
52,5°	282.9	296.1	304.6	308.3	308.1	304.7	299.6	297.0	297.9	293.2	280.2	268.9	260.6
55,0°	283.4	296.4	304.5	307.4	306.1	302.7	301.1	302.7	299.0	287.3	277.3	263.0	250.2
57,5°	281.8	294.2	302.3	304.6	302.4	301.8	305.3	302.8	291.1	282.3	265.6	251.7	240.8
60,0°	278.0	289.6	297.4	299.9	298.1	301.4	306.7	298.1	285.4	267.5	252.7	240.4	231.1
62,5°	271.5	282.8	289.9	292.5	289.2	290.5	292.2	289.3	274.8	251.5	238.4	226.6	217.3
65,0°	265.5	275.5	281.2	283.0	276.6	272.6	272.7	269.1	253.6	232.0	217.9	208.5	203.1
67,5°	255.5	265.6	270.2	271.0	264.5	259.5	258.9	247.4	230.6	208.1	193.8	187.1	185.3
70,0°	245.6	253.4	256.5	255.8	251.0	242.8	232.3	218.1	200.6	183.2	168.1	164.4	158.1
72,5°	228.5	234.6	236.2	235.1	233.9	223.7	206.6	186.8	169.6	156.3	143.4	138.9	120.8
75,0°	194.7	195.1	199.0	209.9	213.2	203.6	180.2	156.3	139.6	128.8	118.9	109.7	86.9
77,5°	118.9	121.4	127.9	140.9	149.5	148.0	139.4	124.1	109.0	97.7	88.2	79.3	61.2
80,0°	48.4	49.8	59.9	70.1	74.5	72.8	73.8	68.2	62.2	64.4	61.2	53.2	40.3
82,5°	5.9	5.6	6.9	11.1	15.0	19.9	24.6	26.8	29.1	29.4	28.1	28.6	21.9
85,0°	2.4	2.3	2.3	2.3	2.2	2.2	2.1	2.8	5.0	6.4	7.9	7.6	6.5
87,5°	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	243.1	243.3	243.5	243.7	244.0	244.1	237.0	236.3	236.1	236.0	235.7	235.4	235.1
5,0°	247.5	247.7	248.2	248.5	248.7	248.9	236.4	235.2	234.6	234.0	233.2	232.7	232.1
7,5°	251.1	251.3	251.7	252.1	252.3	252.4	235.6	234.0	232.8	231.8	230.6	229.8	228.8
10,0°	253.6	253.7	254.0	254.3	254.5	254.5	234.4	232.3	230.7	229.3	227.7	226.4	225.4
12,5°	255.2	255.1	255.2	255.4	255.5	255.5	233.2	230.5	228.3	226.5	224.5	223.1	222.0
15,0°	256.0	255.7	255.5	255.5	255.3	255.2	232.0	228.8	226.1	223.7	221.5	220.0	218.8
17,5°	256.4	255.7	255.2	254.9	254.6	254.5	231.1	227.2	224.0	221.0	218.5	216.8	215.8
20,0°	256.4	255.4	254.5	253.9	253.5	253.3	230.6	226.1	222.2	218.7	215.9	214.1	213.2
22,5°	256.1	254.8	253.4	252.3	251.7	251.4	230.4	225.2	220.5	216.3	213.3	211.4	210.7
25,0°	255.5	253.9	252.2	250.6	249.8	249.4	230.5	224.3	218.9	214.2	210.9	208.9	208.1
27,5°	254.6	252.6	250.7	248.6	247.2	246.8	230.6	223.7	217.2	211.8	208.1	206.1	205.4
30,0°	254.1	251.5	248.9	246.5	244.5	244.0	231.7	223.3	215.8	209.9	206.0	203.9	203.6
32,5°	253.8	250.5	247.2	244.2	242.0	241.4	233.2	223.4	215.0	208.6	204.5	202.8	202.8
35,0°	253.1	249.3	245.3	242.1	239.8	239.0	235.9	224.7	215.1	208.4	204.6	203.2	203.1
37,5°	252.2	248.0	243.9	240.6	237.9	237.1	239.1	226.9	216.7	210.0	206.5	204.9	203.8
40,0°	251.1	246.5	242.5	239.3	236.9	236.2	244.5	231.5	221.4	214.9	211.2	208.5	204.5
42,5°	250.6	247.4	246.2	245.4	244.3	244.1	251.0	238.3	228.9	223.2	219.6	214.8	206.2
45,0°	259.7	257.6	255.2	252.2	249.1	248.0	257.8	245.1	236.2	231.1	227.7	221.4	208.7
47,5°	262.6	254.5	249.2	246.7	244.6	244.1	262.9	250.1	241.1	236.1	232.0	224.4	210.0
50,0°	257.5	253.5	248.0	244.1	241.3	240.6	266.1	252.3	242.8	237.7	233.1	223.6	208.6
52,5°	251.2	244.9	242.1	240.7	239.3	238.9	266.9	251.8	241.0	234.6	229.9	219.4	203.8
55,0°	243.2	238.5	237.3	237.6	236.9	236.9	267.2	250.9	238.0	229.3	222.4	210.0	194.8
57,5°	234.8	231.1	231.4	231.5	228.4	226.6	265.9	248.8	234.0	222.2	211.5	194.5	178.5
60,0°	224.0	222.1	219.2	203.5	185.6	178.7	262.4	244.0	227.9	213.5	198.5	177.2	155.0
62,5°	211.1	203.0	179.8	157.1	151.1	152.4	255.7	235.9	219.2	203.8	187.0	161.9	138.0
65,0°	192.2	167.0	147.6	160.8	169.6	166.4	248.1	226.8	210.5	196.1	179.7	152.0	125.4
67,5°	160.4	132.9	139.7	112.6	79.6	70.0	238.5	217.0	201.7	186.0	166.0	137.5	102.2
70,0°	124.2	113.5	80.1	43.1	37.5	36.7	228.2	207.7	189.6	168.8	152.1	121.0	79.1
72,5°	94.2	70.4	34.4	31.3	30.3	30.0	213.8	196.5	166.3	147.8	140.2	97.8	60.8
75,0°	68.8	33.0	24.9	24.6	23.8	23.5	185.0	166.1	133.3	129.6	114.8	74.9	40.4
77,5°	42.1	18.9	17.8	17.5	16.7	16.4	125.5	104.8	84.8	89.9	72.8	40.0	22.4
80,0°	20.7	11.7	11.4	10.9	10.4	10.2	49.6	44.0	43.6	48.4	32.4	14.5	12.4
82,5°	9.2	6.5	6.2	6.1	5.7	5.6	6.8	6.4	10.9	13.5	8.3	5.6	5.7
85,0°	2.9	2.5	2.5	2.4	2.3	2.2	2.4	2.4	2.4	2.4	2.3	2.2	2.1
87,5°	0.9	0.8	0.9	0.8	0.8	0.8	1.3	1.3	1.3	1.3	1.3	1.3	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	0.4	0.4
2,5°	234.8	234.7	234.6	234.3	234.3	234.4	234.5	234.3	234.3	234.2	234.2	2.8	3.2
5,0°	231.3	231.0	230.6	230.1	229.9	229.8	229.7	229.6	229.4	229.4	229.4	5.7	8.9
7,5°	227.9	227.2	226.7	226.2	225.8	225.7	225.5	225.3	225.2	225.3	225.3	8.5	17.4
10,0°	224.2	223.7	223.2	222.7	222.5	222.5	222.4	222.4	222.5	222.6	222.7	11.3	28.7
12,5°	220.9	220.4	220.2	220.2	220.3	220.5	220.8	221.1	221.4	221.7	221.9	14.1	42.8
15,0°	218.0	217.8	218.1	218.5	219.1	219.7	220.3	220.9	221.6	222.0	222.2	16.8	59.6
17,5°	215.5	215.7	216.3	217.2	218.2	219.2	220.1	221.0	221.9	222.4	222.6	19.5	79.1
20,0°	213.3	213.9	214.9	216.1	217.4	218.4	219.3	220.3	221.1	221.7	221.9	22.2	101.2
22,5°	211.0	211.7	213.0	214.3	215.5	216.4	217.1	217.7	218.3	218.9	219.1	24.7	125.9
25,0°	208.4	209.5	210.8	212.0	212.8	213.1	213.1	213.0	213.1	213.4	213.7	27.2	153.2
27,5°	206.1	207.2	208.3	208.7	208.3	207.6	206.7	206.2	205.8	205.7	205.9	29.6	182.8
30,0°	204.5	205.4	205.3	204.4	202.8	200.8	199.0	197.7	197.2	196.9	197.1	31.9	214.7
32,5°	203.4	203.2	201.5	198.8	195.6	192.4	190.2	189.2	189.2	189.8	190.2	34.2	248.8
35,0°	202.5	199.9	195.9	191.3	186.9	183.7	183.2	184.2	185.8	187.0	187.5	36.4	285.3
37,5°	200.6	195.5	189.2	183.4	179.5	178.6	181.2	183.8	184.5	184.1	183.9	38.8	324.0
40,0°	198.0	189.6	181.5	176.2	175.6	179.2	182.3	180.9	177.6	175.3	174.7	41.1	365.1
42,5°	194.7	183.2	174.9	172.9	177.5	180.3	177.4	172.5	168.6	167.4	167.3	43.5	408.6
45,0°	192.0	177.6	171.3	174.8	178.0	174.0	167.2	161.5	159.2	159.1	159.4	45.9	454.5
47,5°	191.5	176.0	172.4	175.1	170.4	161.0	153.1	151.1	151.4	151.1	150.9	47.9	502.4
50,0°	191.0	178.3	173.0	165.5	156.1	145.9	140.5	139.6	136.6	132.9	131.7	49.3	551.6
52,5°	188.5	178.4	165.3	151.1	137.1	128.7	128.3	125.6	119.8	116.5	116.0	50.0	601.7
55,0°	180.5	166.4	147.4	130.9	119.3	117.7	116.1	110.0	105.8	104.4	104.7	50.3	651.9
57,5°	160.7	141.9	126.3	112.6	107.9	108.0	101.5	97.5	96.5	95.8	96.2	49.8	701.7
60,0°	137.1	120.9	107.9	100.7	100.2	95.4	88.5	86.8	86.3	85.0	85.1	48.3	750.0
62,5°	120.2	105.6	96.5	93.8	89.2	80.7	76.1	75.2	74.5	72.5	72.3	46.0	796.0
65,0°	103.2	92.1	87.2	82.7	74.1	66.9	63.7	62.8	63.5	59.8	59.3	43.9	839.8
67,5°	79.9	73.1	69.4	64.1	58.1	54.4	51.9	51.9	53.0	49.0	48.0	39.6	879.5
70,0°	59.9	55.4	52.2	49.6	47.6	45.3	41.9	41.0	41.2	36.5	35.7	34.9	914.4
72,5°	44.5	42.2	40.2	39.5	38.4	35.2	31.1	29.9	28.7	24.4	23.5	30.4	944.8
75,0°	32.9	31.4	31.0	30.7	29.2	25.4	20.6	18.2	15.7	12.8	12.1	25.2	969.9
77,5°	22.0	21.6	20.9	19.9	17.6	14.7	11.7	9.7	7.7	5.2	5.0	17.3	987.2
80,0°	11.8	11.1	10.5	9.8	8.8	7.5	6.0	4.8	3.6	2.0	1.8	8.9	996.1
82,5°	5.5	5.1	4.9	4.6	4.3	3.7	3.0	2.4	1.8	1.1	1.0	2.9	999.0
85,0°	2.0	1.9	1.9	1.8	1.6	1.4	1.2	1.1	0.9	0.8	0.7	0.7	999.7
87,5°	1.1	1.1	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	10640	71.6	74.6	73.1
95	241	252	10095	67.1	69.8	68.4
90	229	250	9593	63.2	65.6	64.4
85	216	248	9048	58.9	61.2	60.0
80	203	246	8504	54.8	56.8	55.8
75	190	243	7959	50.7	52.7	51.7
70	178	241	7456	47.1	48.9	48.0
65	165	238	6912	43.3	44.9	44.1
60	152	235	6367	39.6	41.1	40.4
55	140	232	5865	36.2	37.5	36.8
50	127	229	5320	32.7	33.8	33.2
45	114	225	4775	29.2	30.3	29.8
40	102	221	4273	26.1	27.0	26.6
35	89	216	3728	22.7	23.5	23.1
30	76	210	3184	19.5	20.1	19.8
25	63	203	2639	16.3	16.9	16.6
20	51	195	2136	13.6	14.0	13.8
15	38	184	1592	10.6	10.8	10.7
10	26	171	1089	8.0	8.1	8.0

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	10640	70.3	71.9	71.1
95	241	252	10096	66.0	67.6	66.8
90	229	250	9593	62.2	63.6	62.9
85	216	248	9049	58.1	59.4	58.8
80	203	246	8504	54.2	55.3	54.8
75	190	243	7960	50.3	51.3	50.8
70	178	241	7457	46.7	47.7	47.2
65	165	238	6912	43.0	43.9	43.4
60	152	235	6368	39.4	40.2	39.8
55	140	232	5865	36.0	36.8	36.4
50	127	229	5320	32.7	33.3	33.0
45	114	225	4776	29.1	29.8	29.4
40	102	221	4273	26.1	26.6	26.4
35	89	216	3728	22.7	23.2	23.0
30	76	210	3184	19.5	19.9	19.7
25	63	203	2639	16.4	16.8	16.6
20	51	195	2137	13.7	13.9	13.8
15	38	184	1592	10.7	10.8	10.8
10	26	171	1089	8.0	8.1	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	10640	70.9	73.6	72.2
95	241	252	10095	66.5	69.1	67.8
90	229	250	9592	62.5	65.0	63.8
85	216	248	9048	58.5	60.6	59.6
80	203	246	8503	54.4	56.4	55.4
75	191	244	8000	50.8	52.6	51.7
70	178	241	7456	46.9	48.6	47.8
65	165	238	6911	43.1	44.7	43.9
60	152	235	6367	39.5	40.8	40.2
55	140	232	5864	36.1	37.4	36.8
50	127	229	5320	32.6	33.7	33.2
45	114	225	4775	29.1	30.2	29.6
40	102	221	4273	26.1	27.0	26.6
35	89	216	3728	22.7	23.5	23.1
30	76	210	3183	19.5	20.2	19.8
25	64	204	2681	16.6	17.2	16.9
20	51	195	2136	13.6	14.0	13.8
15	38	184	1592	10.6	10.9	10.8
10	26	171	1089	7.9	8.1	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V31G08JB EAN: 4069025150264	LP number 59540_51
--	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	10640.0	71.6
5.0	10640.0	70.3
15.0	10640.0	70.9