
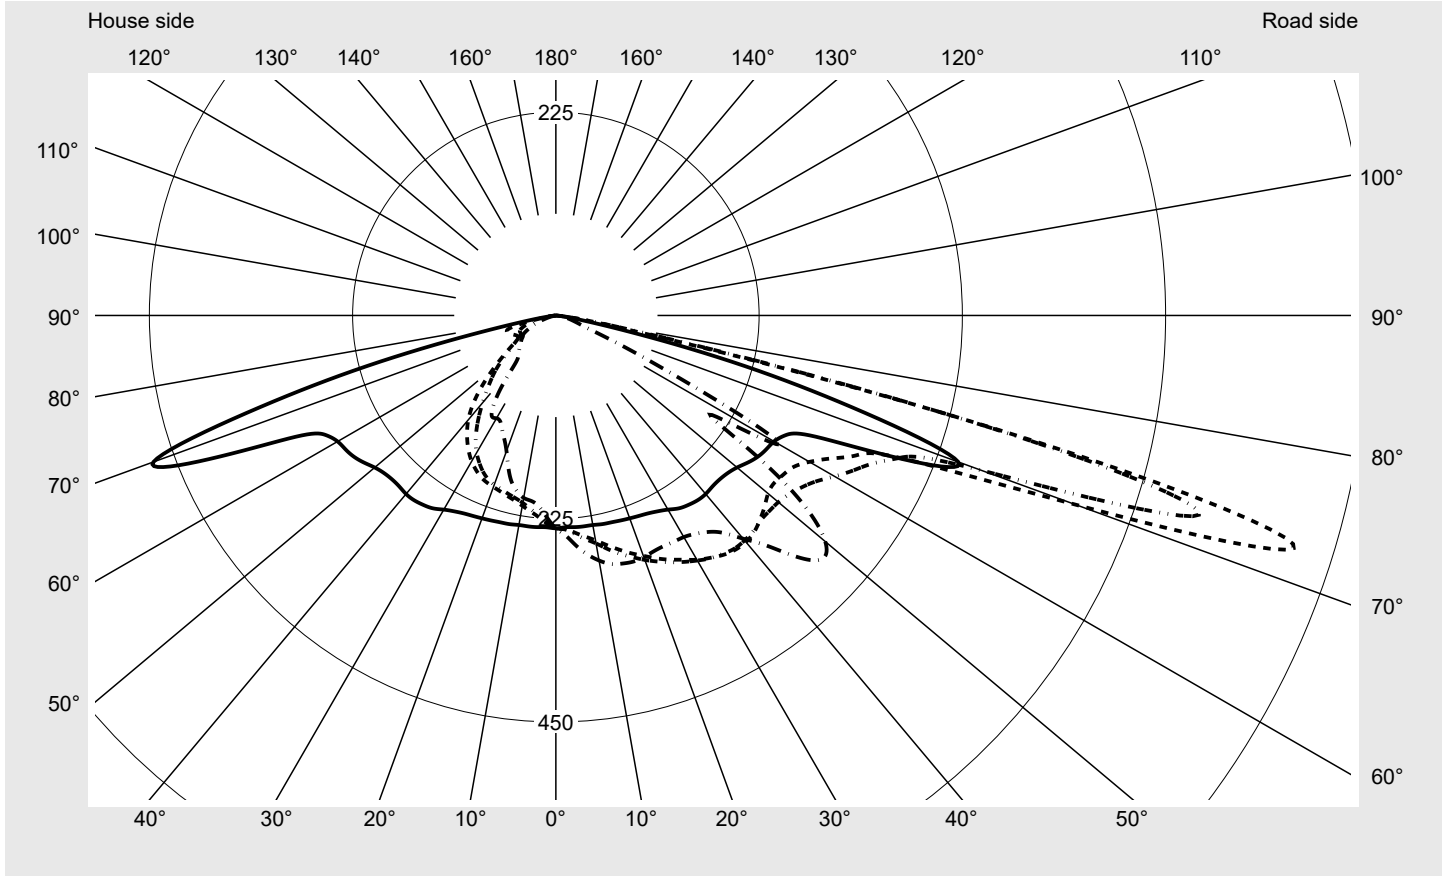


Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
	Version post-top or side-entry mounting, Smart Interface down Optic asymmetric, extremely wide distribution (P0.8a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG-Smart Interface Rated values Net luminous flux = 22900 lm Power consumption = 151.2 W Luminous efficacy = 151.5 lm/W	serial documentation 18.01.2024



Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 856 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	618.8
Imax 80°	68.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
--	--	-------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

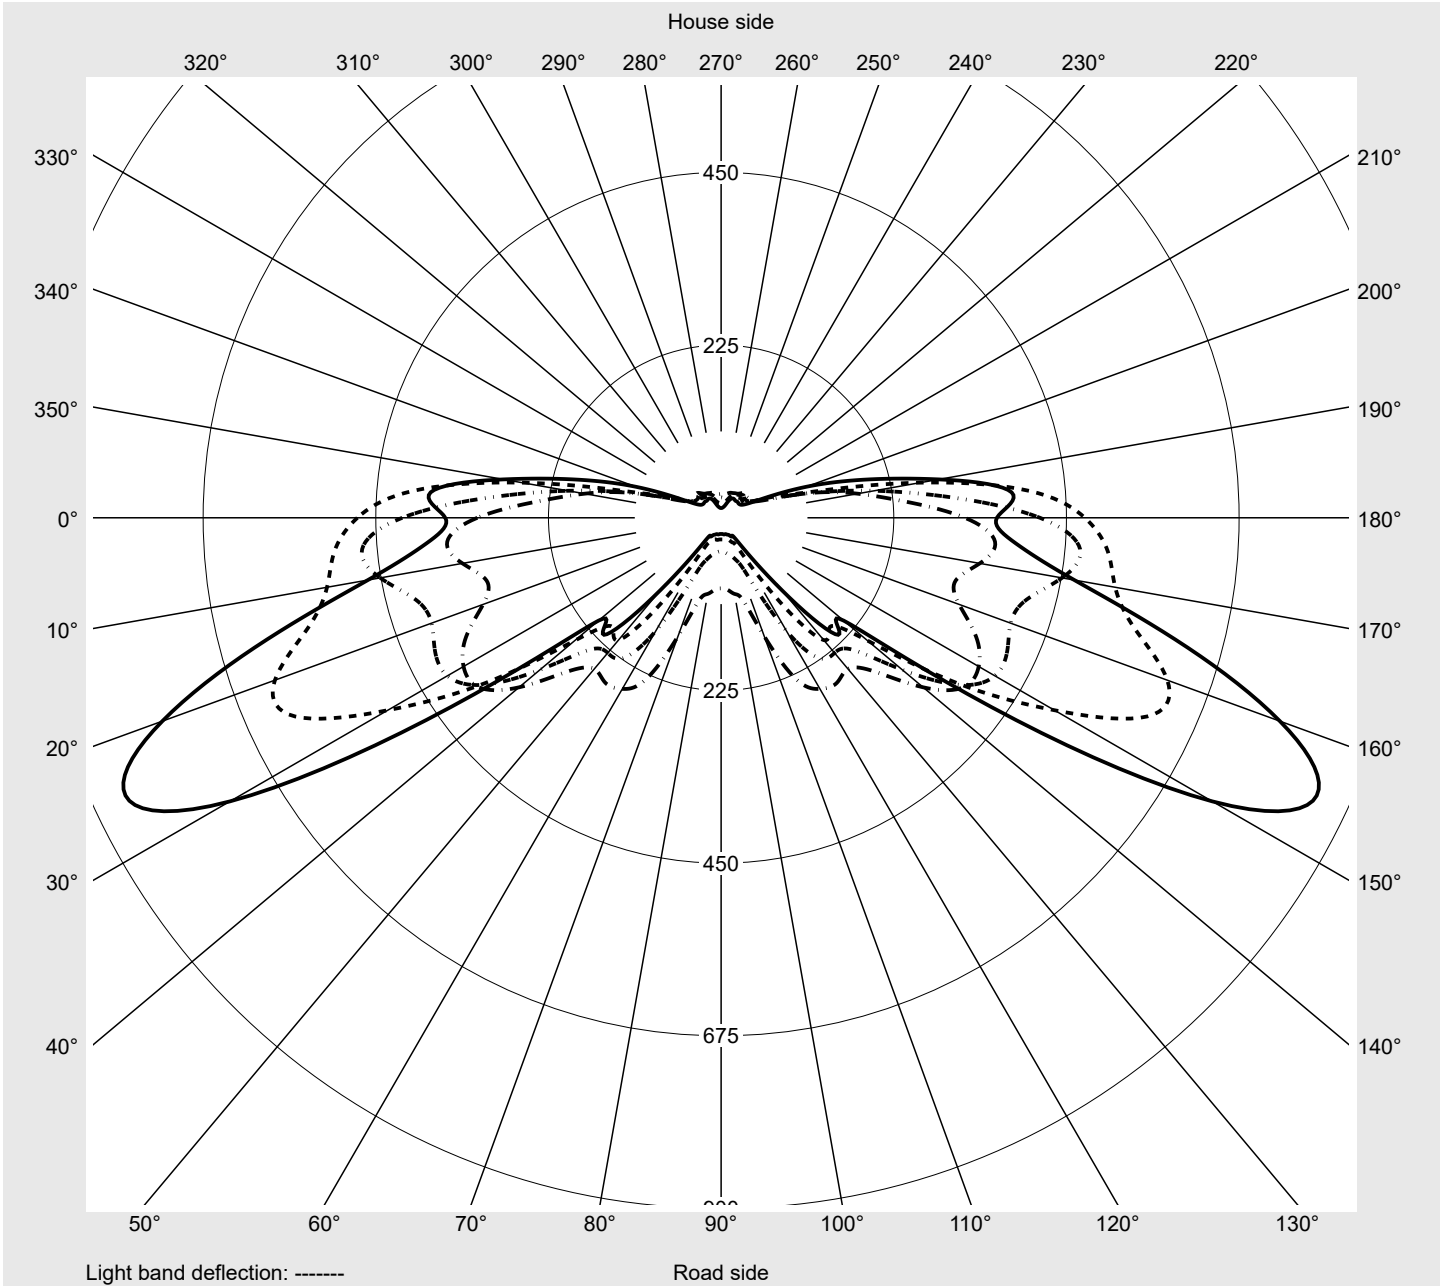

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	234.7	235.2	235.9	236.3	236.6	236.6	237.1	238.2	239.1	239.6	240.2	240.8	241.4
5,0°	235.2	235.6	236.3	237.6	239.5	241.3	243.0	244.7	246.6	248.1	249.5	251.0	252.0
7,5°	235.5	236.3	238.0	240.8	243.9	246.8	249.7	252.2	254.9	256.9	258.9	260.6	262.1
10,0°	235.5	236.9	240.3	244.4	248.7	252.8	256.3	259.5	262.8	265.6	267.6	269.4	270.9
12,5°	236.6	239.6	244.5	249.8	255.3	260.4	264.8	268.6	271.6	274.3	276.7	278.4	279.6
15,0°	237.1	242.1	248.6	255.9	262.4	268.1	272.9	276.0	279.3	281.8	283.4	284.4	285.0
17,5°	238.0	245.1	253.5	262.0	269.7	275.9	280.4	284.2	286.5	288.0	288.8	288.8	288.4
20,0°	239.0	248.9	259.1	268.7	277.4	283.1	288.0	290.8	292.2	293.0	292.9	292.1	290.8
22,5°	240.2	252.1	264.0	275.5	284.7	291.0	294.8	297.0	297.3	297.0	295.8	293.9	291.9
25,0°	241.7	256.4	269.7	282.6	291.9	298.2	301.4	303.0	302.4	300.4	297.9	295.3	292.3
27,5°	244.4	261.7	277.2	290.5	299.8	304.8	307.5	308.4	306.8	303.6	299.8	296.2	293.4
30,0°	248.2	267.9	285.5	299.1	307.5	312.2	313.2	312.7	310.3	306.3	302.1	298.3	295.0
32,5°	253.2	275.1	294.8	308.3	315.3	318.1	318.6	316.5	312.9	309.0	305.2	301.4	299.1
35,0°	256.0	280.7	302.4	316.0	321.9	323.5	322.2	319.1	315.4	312.5	309.8	307.8	305.7
37,5°	257.8	284.8	307.2	321.0	325.8	326.7	325.1	321.5	317.8	316.2	316.4	317.1	315.6
40,0°	258.0	287.5	310.2	322.7	326.9	327.3	325.0	322.7	322.1	322.8	327.0	330.8	329.2
42,5°	256.7	287.7	310.0	321.3	324.3	325.0	323.6	324.2	327.6	332.7	340.5	346.4	346.9
45,0°	256.6	288.1	308.0	315.7	318.1	319.6	320.7	326.4	335.0	346.1	357.7	365.7	371.4
47,5°	258.2	288.9	305.8	309.5	309.7	313.4	320.5	332.2	346.1	362.6	377.2	387.9	396.1
50,0°	261.8	290.2	302.3	301.0	300.0	306.7	321.5	340.0	358.4	378.5	396.1	408.8	416.2
52,5°	267.6	293.4	300.8	295.4	293.1	304.6	325.3	350.3	370.6	391.3	406.9	415.8	411.4
55,0°	272.8	296.9	299.8	291.5	291.2	307.3	331.9	362.0	382.3	398.0	404.3	399.0	374.0
57,5°	276.0	299.2	298.8	289.2	292.4	312.1	341.7	374.1	390.1	391.8	379.5	349.4	309.6
60,0°	279.0	303.6	299.5	289.6	297.1	324.2	356.3	384.7	389.5	368.9	333.7	295.4	269.7
62,5°	286.9	315.3	307.8	295.1	308.6	343.0	371.4	388.3	374.0	327.5	286.9	271.6	282.6
65,0°	317.6	358.3	342.3	316.4	330.0	366.6	387.6	385.2	343.7	283.6	257.0	262.7	257.4
67,5°	415.5	469.6	451.1	412.1	401.5	411.4	411.9	379.6	308.1	243.4	229.9	223.3	170.3
70,0°	474.0	505.9	521.5	558.0	618.8	612.6	501.5	376.0	249.0	200.9	208.1	134.9	52.2
72,5°	359.4	385.8	467.5	612.6	774.9	856.4	739.2	430.1	208.5	215.7	123.1	38.5	28.0
75,0°	217.0	235.1	244.0	284.5	439.0	598.5	574.8	446.3	365.7	173.9	47.3	23.6	20.9
77,5°	84.6	127.6	114.0	114.9	138.6	182.9	201.9	296.7	316.9	127.3	20.5	18.5	15.7
80,0°	25.9	36.3	41.1	42.9	45.7	50.6	56.5	68.3	62.6	24.9	14.8	12.0	10.8
82,5°	6.9	8.1	10.0	11.8	13.7	15.5	15.0	11.3	10.2	7.8	6.8	7.0	6.3
85,0°	2.5	2.4	2.2	2.1	2.3	2.4	2.6	2.2	2.1	2.1	2.8	2.6	3.0
87,5°	1.3	1.2	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	242.1	242.7	242.9	243.3	243.6	243.6	233.9	232.6	232.1	231.5	230.4	229.4	228.4
5,0°	253.1	253.8	254.4	255.1	255.4	255.6	232.8	230.9	228.4	226.2	223.7	221.9	220.0
7,5°	263.4	264.5	265.3	266.1	266.5	266.8	232.3	228.5	224.9	221.8	218.5	216.0	213.6
10,0°	272.2	273.3	274.4	274.8	275.3	275.4	231.7	226.3	221.9	217.7	213.9	210.7	208.5
12,5°	280.0	280.4	281.1	281.0	281.6	281.7	231.8	225.0	219.1	214.2	210.0	207.1	205.4
15,0°	284.9	284.8	284.7	284.5	284.6	284.3	231.7	223.6	216.8	211.0	206.9	204.3	202.7
17,5°	287.8	286.8	286.2	285.8	285.7	285.6	231.9	222.1	214.2	208.2	204.3	201.6	199.7
20,0°	289.1	287.5	286.1	285.1	284.6	284.7	232.2	220.9	211.9	205.8	202.1	199.5	195.9
22,5°	289.6	286.9	284.9	283.4	282.6	282.7	231.3	219.0	209.4	203.8	200.0	196.1	190.4
25,0°	289.7	287.1	284.7	282.7	281.6	281.8	230.9	217.2	207.0	201.2	197.0	190.8	184.6
27,5°	290.7	288.1	285.3	283.5	282.2	282.4	231.0	215.8	204.8	198.3	192.1	183.6	175.8
30,0°	292.7	290.3	287.4	284.9	283.3	283.3	231.9	215.2	203.1	195.6	186.4	175.5	165.7
32,5°	296.9	294.2	290.9	288.1	286.8	286.7	233.9	215.1	201.6	192.3	179.1	165.3	151.3
35,0°	303.7	300.3	297.0	294.1	292.8	292.6	234.2	214.0	199.0	187.8	170.8	152.9	133.6
37,5°	312.8	310.0	307.3	304.8	303.4	303.2	232.9	211.7	195.9	181.7	161.4	139.5	117.8
40,0°	327.4	326.6	326.1	323.7	322.3	322.6	230.5	207.6	190.1	173.9	150.8	126.1	104.7
42,5°	348.4	350.5	351.2	347.7	345.8	345.6	225.6	199.9	180.2	161.5	137.5	113.5	93.3
45,0°	376.2	379.7	381.2	379.7	377.9	378.1	221.9	191.8	167.6	144.8	121.9	102.0	82.5
47,5°	401.7	405.0	405.0	402.3	399.3	399.3	220.2	184.5	154.2	125.7	104.8	91.2	73.0
50,0°	414.0	405.7	397.5	391.6	388.9	389.3	222.4	181.7	144.5	107.3	87.9	79.1	65.2
52,5°	392.1	370.1	354.6	348.1	346.3	348.2	226.1	181.6	137.5	92.3	73.1	67.3	60.3
55,0°	337.6	304.9	283.0	272.8	269.0	270.9	229.7	182.1	133.7	80.5	60.8	58.1	58.1
57,5°	271.5	242.0	225.0	215.8	207.8	205.0	230.4	179.6	129.0	73.2	51.8	51.4	55.3
60,0°	264.0	271.2	273.1	272.9	277.8	285.6	230.7	177.3	127.7	71.4	48.1	45.8	51.3
62,5°	283.7	274.7	259.6	225.0	192.5	183.4	228.9	175.1	126.4	72.1	48.4	43.7	47.7
65,0°	232.6	164.2	111.7	100.7	94.0	92.0	241.4	180.8	126.6	74.4	50.7	43.6	43.9
67,5°	86.7	59.5	51.2	47.7	44.6	43.8	302.9	202.7	126.9	77.2	53.7	43.0	39.8
70,0°	35.6	31.0	29.1	29.3	28.4	28.3	402.8	263.5	138.3	85.7	56.7	39.7	35.3
72,5°	25.1	23.4	22.0	22.1	21.3	21.1	380.0	288.0	191.6	118.1	56.9	34.6	30.1
75,0°	19.2	17.9	16.9	16.8	16.3	16.0	178.4	166.7	153.9	124.4	50.5	28.1	24.5
77,5°	13.8	13.2	12.3	11.9	11.7	11.6	58.4	60.7	56.1	51.7	29.3	20.7	18.3
80,0°	9.4	9.1	8.0	7.4	7.2	7.1	17.6	17.5	18.3	20.2	13.8	11.8	11.5
82,5°	5.4	5.0	4.4	4.2	4.0	3.9	5.6	5.5	5.2	6.9	6.1	6.0	5.6
85,0°	2.4	2.2	1.8	1.7	1.6	1.5	2.6	2.6	2.7	2.7	2.7	2.6	2.4
87,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.5	1.5	1.6	1.5	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	0.4	0.4
2,5°	227.4	226.8	226.2	225.5	225.0	224.7	224.4	224.1	224.0	223.9	223.9	2.8	3.1
5,0°	218.1	217.3	216.1	214.8	213.9	213.4	213.2	212.8	212.6	212.6	212.5	5.6	8.7
7,5°	211.6	210.3	209.1	208.2	207.6	207.5	207.3	207.2	207.2	207.3	207.2	8.4	17.1
10,0°	207.0	206.1	205.5	205.1	204.9	204.7	204.6	204.9	205.0	205.1	205.0	11.2	28.3
12,5°	204.1	203.5	203.0	202.4	201.7	200.9	200.0	199.6	199.3	199.3	199.1	14.1	42.5
15,0°	201.6	200.3	198.8	196.6	194.9	193.4	192.0	190.9	190.4	190.3	190.1	16.9	59.4
17,5°	197.6	194.5	191.9	189.0	186.6	184.3	181.5	179.0	177.3	175.8	175.4	19.6	79.0
20,0°	191.3	187.9	184.5	181.4	176.1	171.1	166.9	163.7	161.5	160.3	159.8	22.1	101.1
22,5°	185.4	180.9	176.0	169.2	162.6	157.4	153.6	151.3	149.9	149.1	148.8	24.5	125.6
25,0°	178.6	171.8	163.2	156.0	150.1	146.1	143.5	142.0	141.0	140.4	140.3	26.8	152.4
27,5°	168.5	157.6	148.3	141.8	137.3	134.4	133.2	132.8	132.7	132.6	132.8	29.0	181.4
30,0°	153.4	141.7	133.3	127.7	125.4	125.3	126.7	128.6	130.2	131.1	131.4	31.2	212.6
32,5°	135.3	124.0	116.0	113.0	114.6	119.0	124.7	129.0	131.2	131.8	132.0	33.4	246.0
35,0°	117.2	104.7	97.8	98.8	106.1	114.2	119.2	121.3	120.9	119.8	119.3	35.4	281.4
37,5°	100.8	87.9	83.5	88.3	95.8	100.2	101.2	100.7	99.3	97.6	96.9	37.0	318.4
40,0°	86.5	75.2	74.8	79.6	81.5	81.7	80.8	77.9	74.4	72.0	71.1	38.7	357.1
42,5°	75.9	69.2	71.0	71.3	71.3	70.4	67.5	65.1	63.3	62.1	61.6	40.7	397.8
45,0°	68.4	67.4	67.8	67.4	67.1	64.5	62.3	60.7	59.5	58.6	58.2	43.2	441.0
47,5°	64.9	65.9	65.1	65.4	62.7	59.6	58.0	56.9	55.9	55.1	54.7	45.5	486.5
50,0°	63.3	63.8	63.9	61.7	57.5	55.3	54.2	53.1	52.2	51.6	51.4	47.0	533.6
52,5°	63.3	61.9	60.9	57.4	53.5	51.9	50.9	50.0	49.2	48.7	48.7	47.3	580.8
55,0°	61.7	58.2	57.1	52.8	49.6	48.4	47.5	46.8	46.3	46.2	46.3	45.9	626.7
57,5°	55.9	54.2	53.1	48.0	45.6	44.6	44.2	43.6	43.3	43.2	43.3	43.9	670.6
60,0°	50.9	51.2	49.0	43.8	42.0	41.0	41.0	41.3	41.4	41.3	41.4	45.6	716.2
62,5°	47.0	48.1	45.1	40.5	38.9	37.8	37.7	37.0	36.3	36.2	36.6	44.9	761.1
65,0°	43.3	45.0	42.0	38.3	36.9	35.6	34.7	32.8	31.3	30.9	31.2	42.1	803.2
67,5°	39.5	41.3	38.8	36.8	35.8	34.1	30.8	27.7	26.5	26.2	26.5	42.5	845.7
70,0°	35.4	36.0	34.3	34.0	33.6	31.2	25.9	21.9	20.1	19.3	19.1	46.5	892.2
72,5°	29.4	29.7	29.0	29.6	29.0	25.6	19.2	15.4	13.8	12.9	12.7	48.7	940.9
75,0°	23.6	23.4	23.0	23.9	24.0	20.0	13.7	10.2	9.1	8.2	8.1	34.4	975.3
77,5°	17.7	16.7	16.1	17.0	17.6	14.4	8.7	6.1	4.9	4.0	3.8	16.7	992.0
80,0°	11.2	10.2	9.2	9.6	10.6	8.1	5.1	3.3	2.2	1.4	1.2	5.4	997.4
82,5°	5.5	5.0	4.3	4.0	4.7	3.8	2.6	1.8	1.2	0.8	0.7	1.7	999.2
85,0°	2.3	2.1	1.8	1.6	1.5	1.2	1.0	0.8	0.7	0.6	0.5	0.6	999.7
87,5°	1.3	1.2	1.1	1.0	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	22900	151.2	156.8	154.0
95	239	252	21784	142.3	147.4	144.9
90	224	249	20632	133.3	138.2	135.8
85	209	247	19456	124.5	128.9	126.7
80	195	244	18326	116.2	120.3	118.2
75	181	242	17166	107.9	111.7	109.8
70	168	239	16072	100.4	103.8	102.1
65	154	236	14877	92.2	95.5	93.8
60	141	232	13743	84.7	87.6	86.2
55	128	229	12592	77.3	79.9	78.6
50	115	225	11416	69.9	72.1	71.0
45	103	221	10315	63.0	65.1	64.0
40	91	216	9192	56.1	58.0	57.0
35	79	211	8055	49.3	50.9	50.1
30	67	205	6901	42.5	43.9	43.2
25	55	198	5727	35.7	36.8	36.2
20	43	189	4540	29.0	29.9	29.4
15	32	178	3433	22.8	23.4	23.1
12	25	169	2724	19.0	19.5	19.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	23680	153.0	158.6	155.8
95	239	252	22486	143.9	149.1	146.5
90	225	250	21343	135.6	140.4	138.0
85	210	247	20100	126.5	131.1	128.8
80	196	245	18912	118.2	122.4	120.3
75	183	242	17785	110.5	114.4	112.4
70	169	239	16558	102.3	105.8	104.0
65	156	236	15403	94.6	97.9	96.2
60	143	233	14227	87.0	90.0	88.5
55	130	229	13037	79.5	82.2	80.8
50	117	226	11827	71.9	74.4	73.2
45	105	222	10695	65.0	67.2	66.1
40	92	217	9447	57.5	59.4	58.4
35	80	212	8284	50.6	52.2	51.4
30	68	206	7106	43.7	45.1	44.4
25	56	199	5909	36.8	38.0	37.4
20	44	190	4702	30.0	30.9	30.4
15	33	179	3580	23.7	24.4	24.0
12	25	169	2757	19.3	19.8	19.6

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	23320	152.1	157.7	154.9
95	239	252	22163	143.1	148.2	145.6
90	224	249	20972	134.0	139.0	136.5
85	210	247	19842	125.7	130.3	128.0
80	196	245	18682	117.5	121.7	119.6
75	182	242	17494	109.2	113.0	111.1
70	168	239	16289	101.0	104.5	102.8
65	155	236	15155	93.4	96.7	95.1
60	142	233	13999	85.8	88.8	87.3
55	129	229	12827	78.4	81.1	79.8
50	116	225	11632	70.8	73.2	72.0
45	104	221	10514	64.0	66.2	65.1
40	91	216	9281	56.5	58.4	57.4
35	79	211	8129	49.6	51.2	50.4
30	67	205	6961	42.8	44.2	43.5
25	56	199	5873	36.5	37.7	37.1
20	44	190	4674	29.8	30.6	30.2
15	32	178	3458	23.0	23.6	23.3
12	25	169	2743	19.1	19.7	19.4

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3U33R08NB EAN: 4069025150981	LP number 59537_129
--	--	--------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	22900.0	151.2
5.0	23680.0	153.0
15.0	23320.0	152.1