

Photometric test report

Family
Streetlight 21 micro easy LED

Order number: 5XE5U47N08DB
EAN: 4058352995303

LP number
59536_81



Version post-top or side-entry mounting, NEMA 7 pin (DALI)
Optic asymmetric, extremely wide distribution (P0.8a)
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG-DALI Plus
Rated values Net luminous flux = 5250 lm
 Power consumption = 39.1 W
 Luminous efficacy = 134.3 lm/W

serial
documentation
18.01.2024

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 879 cd/klm

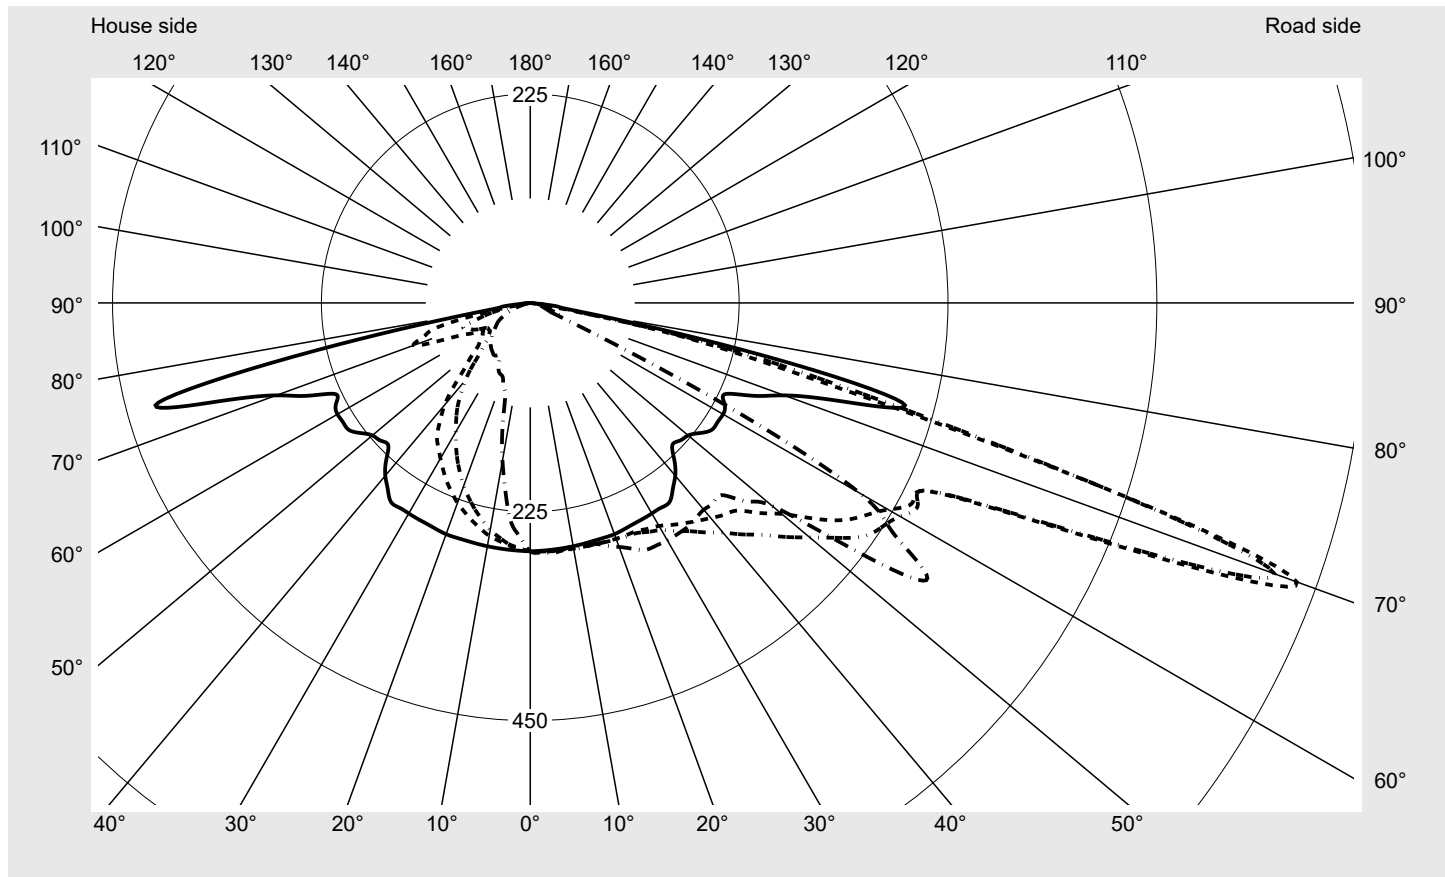

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	878.7
Imax 80°	57.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U47N08DB EAN: 4058352995303	LP number 59536_81
--	--	------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

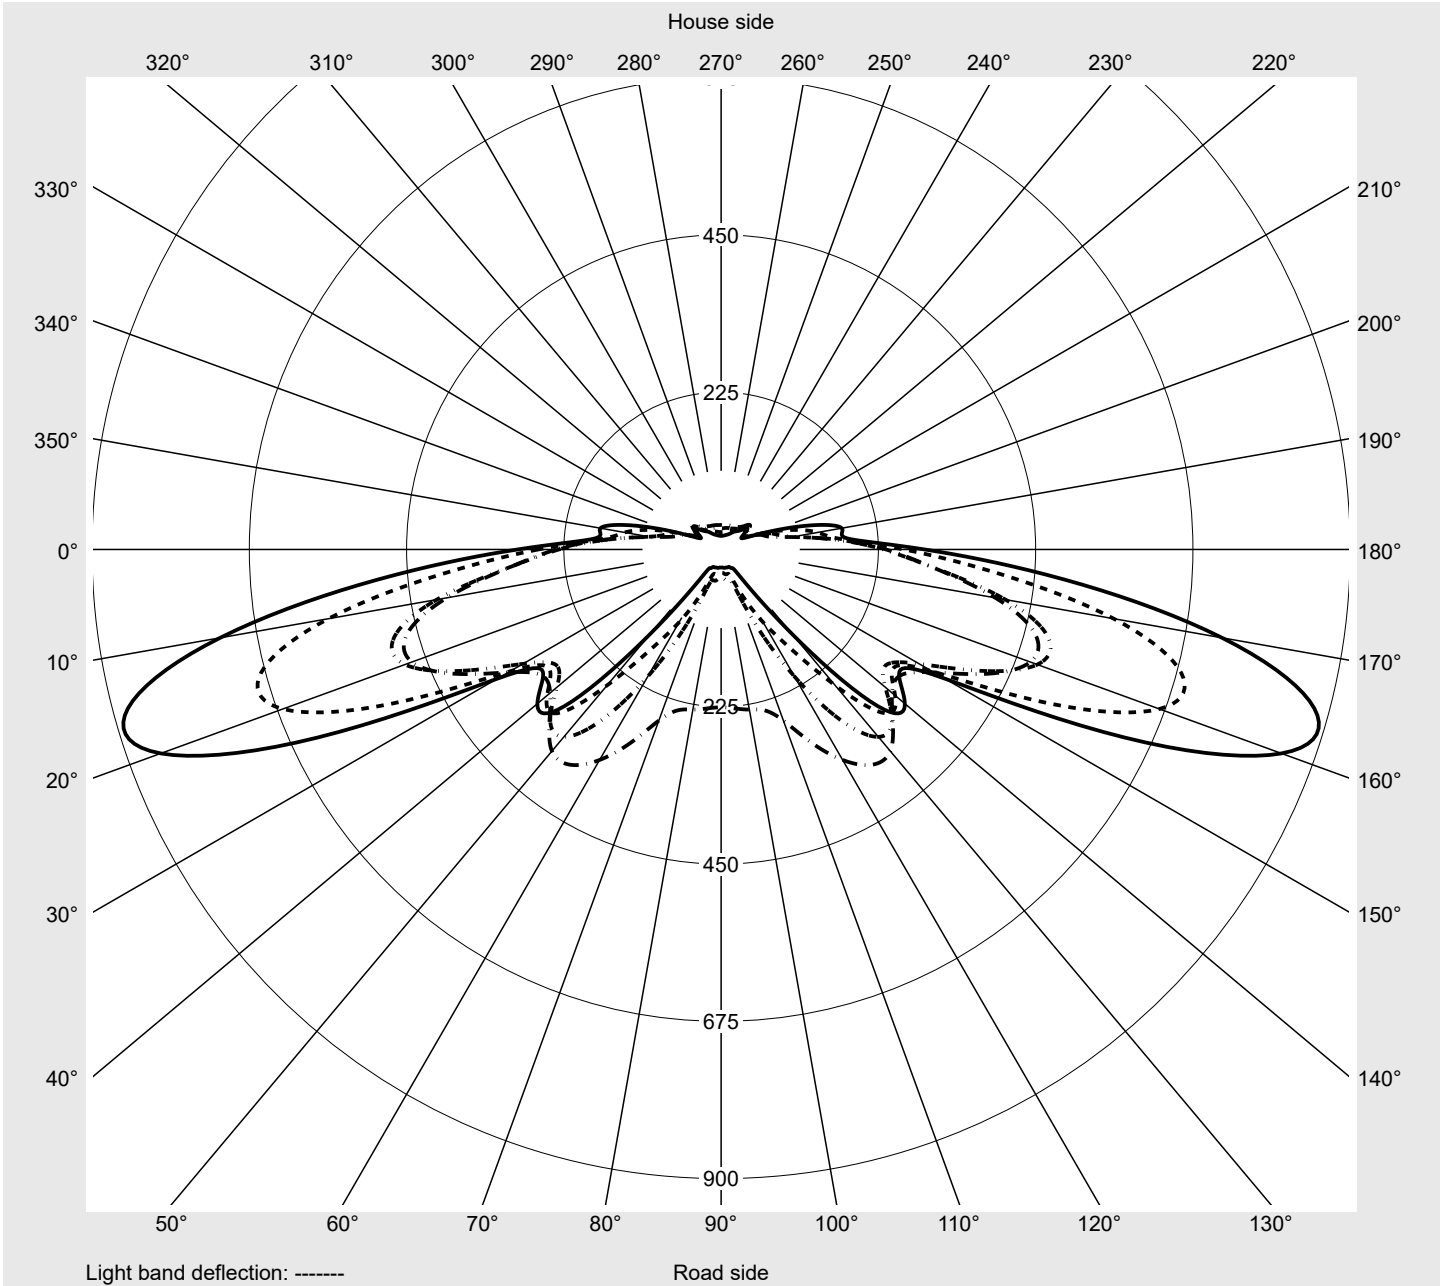

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U47N08DB EAN: 4058352995303	LP number 59536_81
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	267.2	267.2	267.4	267.7	268.0	268.2	268.3	268.4	268.7	268.6	268.6	268.7	268.7
5,0°	266.9	266.9	267.2	267.8	268.6	268.9	269.1	269.3	269.8	269.6	269.6	269.8	269.9
7,5°	266.5	266.7	267.4	268.3	269.0	269.1	269.0	269.1	269.2	269.0	268.6	268.3	268.2
10,0°	266.2	266.6	267.5	268.8	269.4	269.4	269.0	268.9	268.7	268.3	267.5	266.8	266.5
12,5°	265.7	266.8	267.7	268.9	269.3	269.2	268.7	268.4	268.0	267.7	267.2	266.8	266.7
15,0°	265.2	267.0	267.9	269.1	269.2	269.1	268.3	267.9	267.3	267.0	266.9	266.8	267.0
17,5°	265.2	267.9	268.8	269.7	270.1	270.0	269.8	269.8	269.9	270.4	270.8	271.1	271.6
20,0°	265.1	268.9	269.6	270.3	271.0	270.8	271.2	271.7	272.4	273.8	274.7	275.4	276.3
22,5°	264.0	268.4	269.8	270.7	272.2	273.3	274.8	276.9	278.7	280.6	282.2	283.8	285.0
25,0°	262.8	268.0	269.9	271.2	273.4	275.7	278.4	282.1	285.0	287.4	289.7	292.2	293.7
27,5°	262.3	269.0	271.7	274.3	277.9	281.8	286.1	291.1	295.3	299.0	301.4	302.9	302.7
30,0°	261.9	269.9	273.5	277.4	282.5	287.8	293.9	300.0	305.5	310.6	313.1	313.5	311.7
32,5°	261.8	271.7	277.3	283.5	291.4	299.5	307.7	315.0	321.0	325.6	326.4	323.2	318.0
35,0°	261.7	273.6	281.1	289.6	300.3	311.1	321.4	329.9	336.4	340.6	339.8	332.9	324.3
37,5°	252.3	268.4	281.4	296.0	311.7	326.6	338.9	348.1	353.7	354.6	350.3	339.3	327.6
40,0°	243.0	263.2	281.8	302.4	323.1	342.1	356.4	366.4	370.9	368.7	360.7	345.6	330.9
42,5°	229.8	256.4	281.5	309.4	338.2	363.9	378.3	385.7	385.6	377.9	365.2	348.0	332.0
45,0°	216.5	249.6	281.2	316.3	353.3	385.7	400.3	405.0	400.3	387.0	369.7	350.4	333.1
47,5°	219.3	258.6	295.9	335.0	373.2	403.4	416.6	415.9	404.4	385.7	366.0	350.2	338.2
50,0°	222.0	267.6	310.6	353.7	393.0	421.0	433.0	426.9	408.5	384.3	362.2	350.0	343.3
52,5°	230.3	281.2	331.6	380.9	415.7	432.1	429.8	415.1	391.8	372.1	363.5	370.8	388.4
55,0°	238.5	294.7	352.7	408.1	438.3	443.1	426.6	403.4	375.0	359.8	364.8	391.6	433.4
57,5°	239.2	300.2	368.4	426.7	449.2	436.9	401.3	371.3	353.4	354.2	384.0	423.0	459.6
60,0°	239.9	305.7	384.0	445.2	460.1	430.6	376.1	339.2	331.9	348.6	403.2	454.3	485.7
62,5°	236.0	306.5	398.6	464.7	470.8	420.8	351.7	313.7	319.3	347.2	376.6	376.0	347.7
65,0°	232.2	307.3	413.1	484.1	481.4	410.9	327.3	288.2	306.7	345.7	350.0	297.8	209.7
67,5°	261.7	400.0	570.4	681.4	667.3	523.6	348.4	299.5	324.9	331.4	253.7	172.7	120.4
70,0°	291.2	492.6	727.8	878.7	853.1	636.3	369.5	310.8	343.1	317.0	157.5	47.7	31.0
72,5°	353.0	430.5	526.3	594.6	600.5	549.8	505.8	527.8	350.6	186.2	90.1	34.6	25.1
75,0°	414.8	368.5	324.8	310.5	347.9	463.4	642.1	744.8	358.1	55.4	22.7	21.6	19.3
77,5°	236.0	205.6	178.8	168.2	183.7	239.0	334.0	387.5	184.9	33.3	17.6	16.7	14.7
80,0°	57.3	42.7	32.7	25.9	19.4	14.6	25.9	30.2	11.7	11.3	12.5	11.9	10.0
82,5°	30.0	22.6	17.5	14.0	10.7	8.3	13.9	16.1	6.8	6.6	7.4	7.1	6.4
85,0°	2.7	2.5	2.3	2.2	2.1	2.0	2.0	2.0	2.0	2.0	2.3	2.4	2.7
87,5°	1.4	1.3	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U47N08DB EAN: 4058352995303	LP number 59536_81
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	268.8	268.7	268.8	268.9	268.9	269.0	266.5	265.7	264.9	264.3	263.2	262.1	260.9
5,0°	270.0	269.8	270.0	270.2	270.3	270.5	265.5	264.0	262.3	261.0	259.0	256.8	254.3
7,5°	268.1	268.0	267.8	268.0	268.1	268.3	264.6	261.7	258.5	254.8	250.1	245.2	240.0
10,0°	266.2	266.2	265.6	265.7	265.9	266.2	263.7	259.4	254.8	248.5	241.2	233.7	225.8
12,5°	266.6	266.7	266.6	266.8	267.1	267.4	262.2	256.2	248.7	239.4	229.0	218.0	206.6
15,0°	267.0	267.3	267.5	267.9	268.3	268.7	260.7	253.0	242.7	230.3	216.7	202.2	187.3
17,5°	271.9	272.4	272.7	273.3	273.7	274.2	260.0	249.6	236.0	220.1	202.7	184.7	166.5
20,0°	276.9	277.5	277.9	278.7	279.1	279.7	259.3	246.2	229.2	209.9	188.8	167.2	145.7
22,5°	285.7	286.0	285.3	285.9	286.0	286.6	256.1	240.7	220.9	197.9	173.1	148.9	124.7
25,0°	294.5	294.4	292.7	293.2	293.0	293.5	253.0	235.1	212.5	186.0	157.4	130.7	103.7
27,5°	301.7	299.6	296.6	295.1	294.3	294.5	249.8	229.0	203.1	173.2	142.1	112.9	90.5
30,0°	308.9	304.7	300.5	297.1	295.6	295.6	246.5	222.9	193.6	160.4	126.8	95.2	77.3
32,5°	313.0	307.3	302.0	297.5	295.4	295.3	243.8	216.9	184.3	148.5	113.2	85.2	75.5
35,0°	317.0	310.0	303.6	298.0	295.1	294.9	241.1	211.0	175.1	136.5	99.5	75.1	73.7
37,5°	317.8	309.7	303.3	296.8	293.1	292.9	227.5	194.9	159.3	122.5	89.6	70.6	71.2
40,0°	318.5	309.4	303.1	295.7	291.1	290.8	213.8	178.8	143.5	108.6	79.7	66.1	68.6
42,5°	318.9	309.7	303.7	297.1	292.4	291.8	194.6	156.5	121.9	92.6	71.9	63.8	66.0
45,0°	319.2	310.1	304.3	298.5	293.8	292.9	175.4	134.2	100.3	76.6	64.1	61.5	63.3
47,5°	329.8	326.0	323.9	321.0	317.3	316.6	170.5	122.9	87.3	67.9	61.3	60.6	62.1
50,0°	340.3	341.9	343.4	343.5	340.8	340.4	165.5	111.6	74.4	59.3	58.4	59.8	60.9
52,5°	405.0	419.9	430.4	434.7	431.6	430.6	167.0	108.2	68.4	56.2	56.5	57.5	57.6
55,0°	469.7	498.0	517.3	525.9	522.3	520.8	168.4	104.8	62.4	53.0	54.6	55.3	54.3
57,5°	478.3	480.2	474.1	472.9	468.6	465.7	167.5	102.3	61.0	53.3	50.4	50.0	50.6
60,0°	486.8	462.4	430.8	419.9	414.9	410.5	166.7	99.7	59.6	53.6	46.2	44.6	46.9
62,5°	304.6	260.5	238.2	232.6	228.3	225.8	164.6	102.3	71.0	60.8	46.8	42.1	46.4
65,0°	122.3	58.5	45.5	45.3	41.7	41.1	162.5	104.9	82.5	68.0	47.5	39.6	45.8
67,5°	75.0	42.9	36.1	36.0	33.8	33.5	171.9	140.1	107.9	72.2	44.8	36.5	43.4
70,0°	27.6	27.3	26.7	26.8	26.0	25.9	181.3	175.3	133.4	76.4	42.1	33.3	41.1
72,5°	22.7	22.0	21.3	21.1	20.5	20.3	265.1	189.7	120.0	62.2	33.7	27.5	35.0
75,0°	17.7	16.6	15.9	15.3	15.0	14.8	348.9	204.0	106.7	47.9	25.3	21.8	29.0
77,5°	13.1	12.5	11.5	11.1	10.8	10.6	193.6	113.1	59.4	29.8	17.4	15.8	20.3
80,0°	8.4	8.3	7.2	6.9	6.6	6.5	38.3	22.1	12.2	11.8	9.4	9.8	11.6
82,5°	5.4	5.2	4.5	4.3	4.1	4.0	20.5	12.5	7.6	7.4	6.0	6.3	7.0
85,0°	2.3	2.1	1.8	1.7	1.6	1.5	2.8	2.8	2.9	2.9	2.7	2.7	2.5
87,5°	1.1	1.0	0.9	0.8	0.8	0.7	1.4	1.4	1.5	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U47N08DB EAN: 4058352995303	LP number 59536_81
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	0.4	0.4
2,5°	259.6	258.4	257.3	256.2	255.1	254.3	253.6	253.0	252.6	252.4	252.3	3.2	3.6
5,0°	251.7	249.4	247.1	244.9	242.7	241.1	239.8	238.5	237.7	237.3	237.2	6.2	9.8
7,5°	234.8	230.1	225.2	220.5	216.3	213.0	210.1	207.9	206.2	205.4	204.8	9.0	18.7
10,0°	217.9	210.8	203.4	196.1	189.9	184.8	180.4	177.3	174.8	173.4	172.5	11.5	30.2
12,5°	195.6	185.0	175.2	166.1	158.0	151.4	146.3	142.8	140.4	139.1	138.4	13.6	43.8
15,0°	173.3	159.2	147.1	136.1	126.1	118.1	112.2	108.3	106.0	104.7	104.3	15.5	59.4
17,5°	149.3	133.3	121.0	111.9	105.2	100.8	98.1	96.7	95.8	95.3	95.2	17.6	76.9
20,0°	125.4	107.5	94.9	87.6	84.4	83.5	84.0	85.2	85.7	85.9	86.1	19.5	96.4
22,5°	105.4	93.2	87.8	86.3	86.0	85.8	85.4	85.1	84.3	83.6	83.3	21.7	118.1
25,0°	85.5	78.9	80.6	84.9	87.6	88.0	86.8	84.9	82.9	81.2	80.5	23.8	141.9
27,5°	81.2	81.9	85.3	88.0	88.0	85.8	82.5	79.3	76.2	74.0	73.1	26.1	168.0
30,0°	77.0	84.8	90.0	91.2	88.3	83.6	78.3	73.6	69.6	66.7	65.7	28.2	196.2
32,5°	79.1	85.7	88.8	87.8	84.1	79.6	75.2	71.9	69.4	67.7	67.1	30.6	226.8
35,0°	81.2	86.7	87.6	84.5	79.9	75.6	72.2	70.2	69.3	68.6	68.4	32.9	259.7
37,5°	76.3	79.2	78.9	77.1	76.1	74.0	71.1	69.2	67.9	67.1	66.7	34.9	294.6
40,0°	71.3	71.6	70.3	69.7	72.4	72.5	70.0	68.2	66.6	65.5	65.1	36.8	331.3
42,5°	67.4	67.5	68.8	69.1	68.9	68.5	66.8	65.5	64.3	63.3	62.9	38.5	369.8
45,0°	63.5	63.4	67.3	68.6	65.4	64.6	63.6	62.8	62.0	61.1	60.7	40.2	410.1
47,5°	62.2	64.8	65.8	64.2	61.6	61.0	60.1	59.3	58.4	57.5	57.2	42.8	452.8
50,0°	60.9	66.1	64.2	59.8	57.9	57.4	56.6	55.8	54.8	53.9	53.6	45.3	498.1
52,5°	59.8	63.6	59.5	55.6	53.9	53.3	52.6	51.7	50.6	49.9	49.7	50.1	548.1
55,0°	58.6	61.0	54.8	51.4	50.0	49.2	48.5	47.6	46.5	45.9	45.9	55.0	603.1
57,5°	57.5	56.2	50.1	47.2	46.0	45.1	44.4	43.8	43.2	42.8	42.8	55.3	658.4
60,0°	56.4	51.4	45.4	43.1	42.0	41.0	40.4	40.0	39.8	39.7	39.6	55.4	713.8
62,5°	54.0	47.8	42.0	39.7	38.3	37.1	36.5	36.0	35.5	35.1	35.0	47.7	761.5
65,0°	51.6	44.2	38.6	36.3	34.6	33.2	32.5	31.9	31.2	30.5	30.5	39.5	800.9
67,5°	48.3	41.4	36.3	33.4	30.6	28.5	27.4	26.5	25.7	25.0	24.9	43.3	844.2
70,0°	45.1	38.6	34.0	30.6	26.6	23.9	22.2	21.1	20.1	19.6	19.4	47.1	891.3
72,5°	38.7	34.3	30.3	25.9	21.5	18.5	16.7	15.5	14.5	14.0	13.8	42.6	933.9
75,0°	32.4	30.0	26.6	21.3	16.4	13.1	11.3	10.0	9.0	8.3	8.1	37.9	971.7
77,5°	22.7	22.3	20.0	15.8	11.7	9.2	7.7	6.6	5.6	4.9	4.7	21.1	992.8
80,0°	13.0	14.5	13.5	10.3	7.0	5.2	4.2	3.1	2.2	1.5	1.3	4.0	996.9
82,5°	7.7	8.3	7.6	6.0	4.2	3.2	2.6	2.0	1.5	1.0	0.9	2.3	999.2
85,0°	2.3	2.1	1.8	1.7	1.5	1.3	1.0	0.8	0.7	0.6	0.6	0.6	999.7
87,5°	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U47N08DB EAN: 4058352995303	LP number 59536_81
--	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5250	39.1	40.8	40.0
95	238	252	4984	36.6	38.1	37.4
90	223	249	4727	34.2	35.7	35.0
85	208	247	4463	31.9	33.3	32.6
80	193	244	4192	29.7	30.9	30.3
75	179	241	3934	27.5	28.6	28.0
70	165	238	3669	25.4	26.5	26.0
65	152	235	3417	23.4	24.4	23.9
60	139	232	3160	21.5	22.4	22.0
55	125	228	2877	19.4	20.2	19.8
50	113	224	2629	17.7	18.4	18.0
45	100	220	2354	15.8	16.5	16.2
40	88	215	2093	14.1	14.6	14.4
35	76	210	1828	12.4	12.9	12.6
30	65	204	1580	10.8	11.2	11.0
25	53	197	1304	9.2	9.5	9.4
20	42	188	1046	7.7	7.8	7.8
15	31	177	784	6.1	6.3	6.2
12	24	168	615	5.1	5.3	5.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5370	39.6	41.3	40.4
95	239	252	5110	37.2	38.8	38.0
90	223	249	4824	34.7	36.1	35.4
85	209	247	4569	32.5	33.9	33.2
80	194	244	4290	30.1	31.5	30.8
75	180	241	4024	28.0	29.1	28.6
70	166	238	3752	25.9	27.0	26.4
65	153	235	3493	24.0	24.9	24.4
60	140	232	3230	22.0	22.9	22.4
55	127	229	2962	20.0	20.8	20.4
50	114	225	2688	18.1	18.9	18.5
45	101	220	2407	16.2	16.8	16.5
40	89	216	2143	14.5	15.0	14.8
35	77	210	1873	12.8	13.2	13.0
30	66	205	1622	11.2	11.5	11.4
25	54	197	1343	9.4	9.8	9.6
20	43	189	1082	7.9	8.2	8.0
15	32	178	816	6.4	6.6	6.5
12	24	168	621	5.2	5.4	5.3

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U47N08DB EAN: 4058352995303	LP number 59536_81
--	--	-------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5310	39.3	41.0	40.2
95	238	252	5038	36.8	38.3	37.6
90	223	249	4776	34.4	35.9	35.2
85	208	247	4507	32.1	33.5	32.8
80	194	244	4250	29.9	31.3	30.6
75	180	241	3988	27.8	28.9	28.4
70	166	238	3720	25.7	26.8	26.2
65	152	235	3445	23.6	24.6	24.1
60	139	232	3185	21.7	22.5	22.1
55	126	228	2919	19.8	20.5	20.2
50	113	224	2647	17.8	18.5	18.2
45	101	220	2391	16.0	16.7	16.4
40	89	216	2129	14.3	14.9	14.6
35	77	210	1861	12.7	13.1	12.9
30	65	204	1589	10.9	11.3	11.1
25	54	197	1335	9.4	9.7	9.6
20	42	188	1052	7.7	7.9	7.8
15	31	177	788	6.2	6.4	6.3
12	24	168	618	5.2	5.3	5.2

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U47N08DB EAN: 4058352995303	LP number 59536_81
--	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	5250.0	39.1
5.0	5370.0	39.6
15.0	5310.0	39.3