


# Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number:</b> 5XE7R37M08LB <b>EAN:</b> 4069025163912	<b>LP number</b> 59535_159
<b>Version</b>	post-top or side-entry mounting, NEMA 7 pin (DALI) + Zhaga down	<b>serial documentation</b> 18.01.2024
<b>Optic</b>	asymmetric, extremely wide distribution (P0.8a), Back Light Control (BLC)	
<b>Cover</b>	toughened safety glass	
<b>Lamps</b>	LED 3000 K   CRI ≥ 70	
<b>Controlgear</b>	EVG-Smart Interface	
<b>Rated values</b>	Net luminous flux = 12450 lm Power consumption = 98.3 W Luminous efficacy = 126.7 lm/W	



**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 1022 cd/klm**

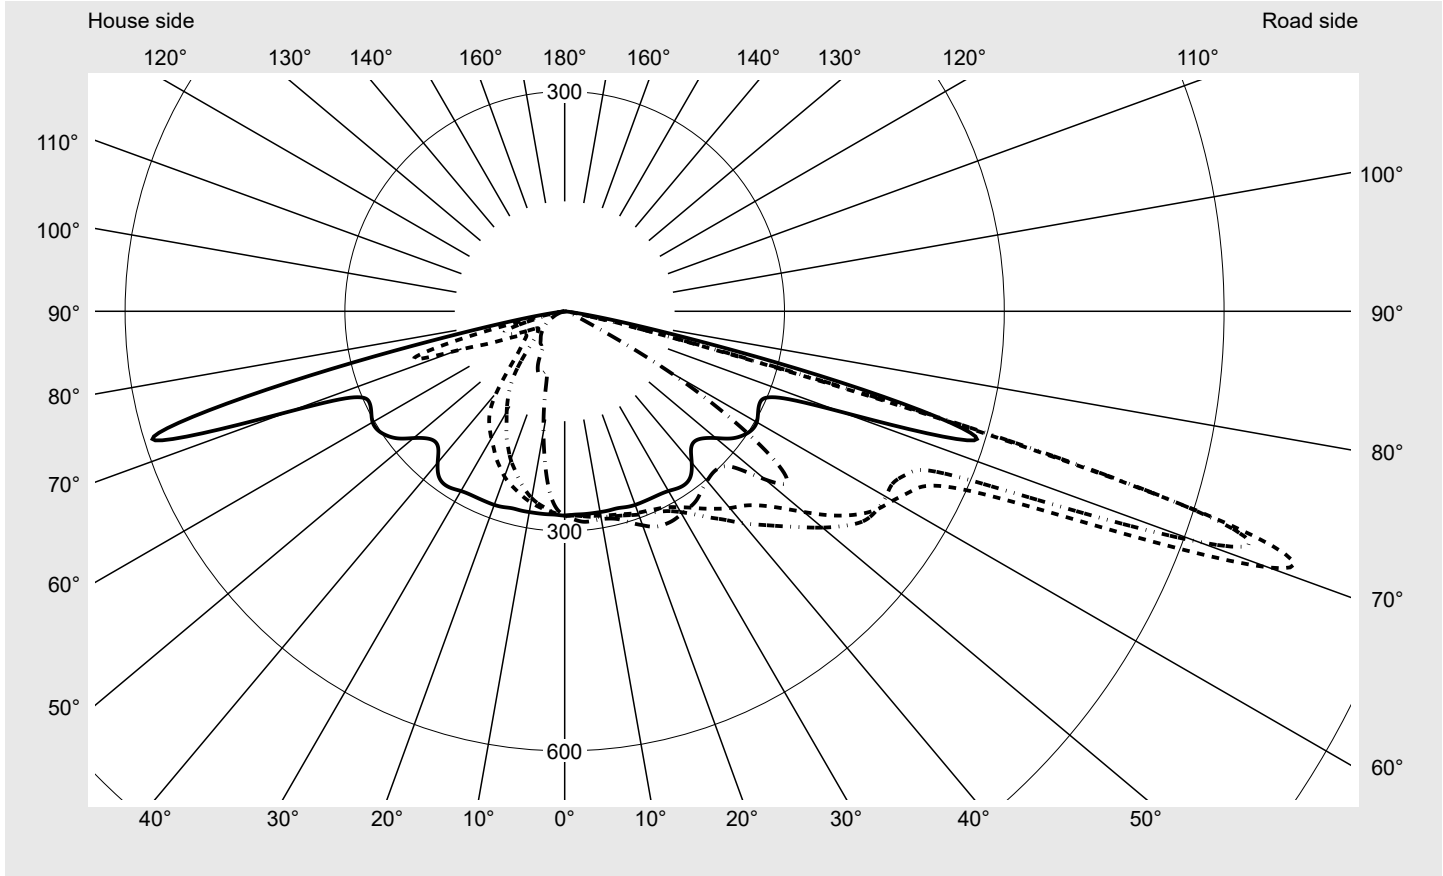

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G3
Imax 70°	1022.3
Imax 80°	56.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7R37M08LB</b> <b>EAN: 4069025163912</b>	<b>LP number</b> 59535_159
---	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**      **siteco**

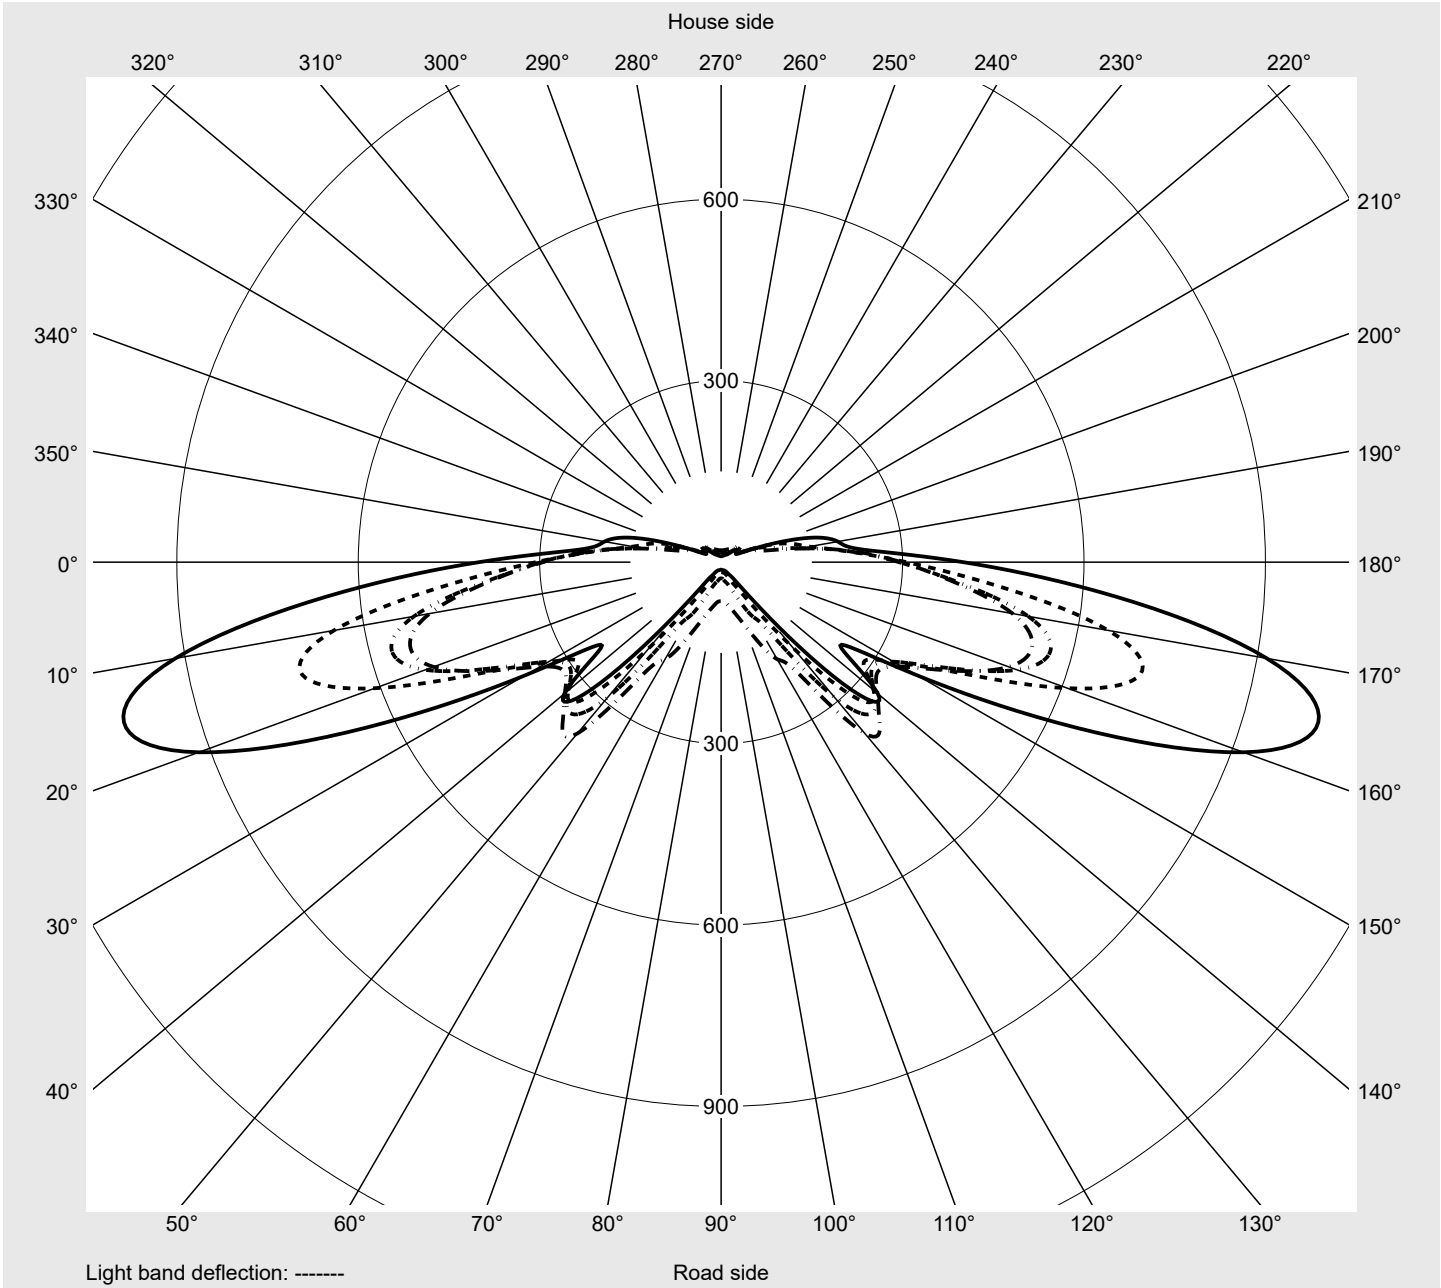

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7R37M08LB</b> <b>EAN: 4069025163912</b>	<b>LP number</b> <b>59535_159</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	277.9	277.8	278.3	278.5	279.1	279.5	279.7	280.3	281.1	281.1	281.8	282.0	282.5
5,0°	278.0	278.0	278.8	279.6	280.7	281.8	282.5	283.4	284.3	284.7	285.3	285.7	286.3
7,5°	278.2	278.8	279.7	281.6	283.0	284.3	285.2	285.8	286.5	286.6	286.8	287.0	287.2
10,0°	278.3	279.3	281.1	283.2	284.8	286.1	286.8	287.1	287.4	287.5	287.6	287.5	287.6
12,5°	278.4	280.6	282.9	285.1	287.1	288.1	288.1	288.3	288.6	288.3	288.2	288.3	288.1
15,0°	278.3	281.8	284.2	287.0	288.9	289.7	290.4	290.4	290.4	290.5	290.7	291.2	291.5
17,5°	280.1	284.2	287.0	289.9	291.8	292.6	293.2	293.3	294.2	295.6	296.5	297.9	299.1
20,0°	281.2	286.5	289.9	292.7	295.2	296.4	297.4	298.7	300.7	302.2	304.8	306.3	307.6
22,5°	281.2	288.0	291.8	294.7	298.0	300.7	303.7	306.7	309.6	312.0	314.3	316.4	318.0
25,0°	281.2	289.0	293.5	297.6	302.0	305.6	310.8	316.1	320.1	323.0	325.6	327.5	328.0
27,5°	281.6	290.6	296.3	301.5	307.4	313.2	319.9	326.8	332.3	336.2	338.0	338.5	336.9
30,0°	283.2	294.4	301.5	308.8	316.5	324.6	332.6	340.2	345.8	350.2	351.0	348.3	344.3
32,5°	286.5	299.7	308.4	317.7	328.5	340.0	349.8	357.0	362.1	365.5	364.2	358.0	349.5
35,0°	287.6	303.8	315.5	328.7	343.4	357.5	368.6	376.7	381.4	382.7	377.3	366.1	353.1
37,5°	282.8	302.1	319.8	339.7	358.7	375.8	388.1	395.7	398.9	396.8	386.6	370.4	354.4
40,0°	269.7	294.5	321.2	350.6	377.6	398.0	410.2	417.0	415.9	407.6	392.5	373.6	355.1
42,5°	255.3	287.6	322.7	360.0	395.2	420.8	432.6	434.9	428.7	414.1	394.4	373.9	354.4
45,0°	251.0	289.5	331.0	374.7	414.6	444.9	453.6	450.5	436.8	415.6	393.7	371.5	352.8
47,5°	256.6	303.0	350.2	396.9	436.1	462.6	468.6	458.1	439.5	412.5	387.5	369.7	355.1
50,0°	269.2	324.0	378.1	426.2	459.3	475.7	475.8	456.8	430.3	401.5	381.2	373.1	369.5
52,5°	285.2	346.9	408.8	457.5	481.0	483.4	467.9	440.5	409.6	388.7	382.1	388.8	404.4
55,0°	295.9	364.8	434.7	484.0	498.6	480.9	443.0	412.5	385.1	377.3	391.6	422.7	440.8
57,5°	302.2	378.2	457.4	504.1	505.0	463.7	409.7	376.6	362.7	372.1	410.7	405.5	386.0
60,0°	302.7	385.2	474.2	517.0	506.3	445.5	376.2	342.3	346.6	374.1	408.1	323.4	289.9
62,5°	297.6	389.4	489.3	532.5	506.1	424.7	345.6	316.1	337.3	370.1	369.8	228.7	185.2
65,0°	294.2	397.3	515.7	563.9	520.7	414.1	329.1	304.9	329.7	352.9	292.0	146.3	103.0
67,5°	306.5	462.0	650.1	717.4	609.4	431.9	331.0	288.1	329.0	319.8	183.6	76.0	42.3
70,0°	400.3	655.6	916.4	1022.3	919.1	647.3	374.3	240.7	338.2	282.9	84.5	28.5	20.0
72,5°	586.0	762.4	853.4	904.4	899.0	672.4	361.6	293.9	353.5	133.4	22.0	16.9	14.5
75,0°	449.7	381.0	325.6	308.5	339.8	261.0	278.4	408.8	241.2	30.0	14.0	12.7	10.9
77,5°	187.6	136.4	104.4	83.4	66.4	31.3	81.0	143.9	55.8	10.9	9.4	9.1	7.9
80,0°	56.2	38.7	28.1	20.2	12.5	7.1	6.9	10.5	5.9	5.4	6.4	5.7	5.0
82,5°	9.6	8.1	6.9	5.8	4.4	3.9	3.4	3.0	2.7	2.5	2.7	2.4	2.4
85,0°	2.7	2.5	2.3	2.2	1.9	1.7	1.6	1.6	1.3	1.3	1.2	1.1	1.0
87,5°	1.5	1.3	1.2	1.2	1.1	1.0	1.0	0.8	0.8	0.8	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7R37M08LB</b> <b>EAN: 4069025163912</b>	<b>LP number</b> <b>59535_159</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	282.9	283.2	283.5	283.8	284.1	284.2	277.4	276.4	276.1	275.6	274.5	273.9	273.1
5,0°	286.6	287.0	287.2	287.6	288.0	288.3	277.0	274.5	272.6	270.8	268.5	266.3	264.1
7,5°	287.4	287.5	287.8	288.2	288.3	288.6	276.2	272.6	269.3	265.7	261.4	256.5	251.1
10,0°	287.2	287.1	287.2	287.7	288.3	288.1	275.3	270.3	265.0	258.9	250.7	242.0	231.8
12,5°	288.1	288.2	288.7	289.2	289.4	289.8	274.1	267.4	259.7	249.5	236.8	222.9	208.7
15,0°	292.0	292.1	292.7	293.8	294.2	294.4	273.1	264.3	253.4	238.6	221.3	203.4	184.9
17,5°	299.9	300.3	300.8	301.6	302.6	302.8	273.2	261.7	247.2	226.6	204.9	181.7	160.7
20,0°	308.0	308.8	309.2	309.9	310.3	310.8	273.2	259.9	240.1	215.4	188.9	162.4	139.4
22,5°	318.6	318.4	318.1	317.7	317.8	318.3	271.5	255.2	230.6	201.6	170.3	143.2	114.9
25,0°	327.4	325.7	323.3	321.8	320.7	321.2	269.5	249.4	221.2	187.9	153.1	121.8	90.5
27,5°	334.3	330.2	326.2	323.3	321.5	321.5	266.7	243.2	210.0	171.9	135.7	99.1	71.1
30,0°	339.2	333.1	326.9	322.2	319.5	319.3	265.3	237.9	200.2	158.3	118.4	79.9	62.3
32,5°	341.5	333.3	325.9	320.7	318.1	317.3	264.9	232.9	190.4	145.0	101.3	66.5	60.1
35,0°	342.5	333.9	325.9	318.9	315.1	314.2	263.0	225.7	179.7	131.6	85.9	59.6	60.6
37,5°	342.0	331.6	322.7	314.3	309.4	307.4	254.3	213.3	165.2	116.7	73.0	56.4	60.0
40,0°	340.1	328.2	319.5	310.6	304.4	302.4	235.8	192.1	144.6	99.3	62.9	54.2	57.1
42,5°	337.2	325.3	318.1	307.7	301.1	299.2	216.4	169.2	122.0	81.3	56.4	52.1	54.2
45,0°	337.1	325.6	317.5	309.4	303.1	301.1	203.9	150.0	103.2	66.2	51.0	50.1	52.0
47,5°	343.8	336.0	329.8	323.8	318.2	316.4	200.2	139.3	88.8	56.2	48.4	48.6	50.7
50,0°	367.8	368.7	368.6	364.8	359.1	357.0	204.6	135.1	79.1	49.7	47.4	49.0	50.6
52,5°	419.9	422.4	412.8	399.2	386.2	382.4	211.0	133.0	72.3	46.2	47.5	49.5	49.6
55,0°	424.6	395.0	374.2	359.3	344.6	341.1	216.4	132.7	66.2	43.9	45.5	46.9	45.5
57,5°	353.8	310.6	285.4	270.3	259.7	257.6	218.5	130.4	61.9	43.1	41.0	41.0	39.3
60,0°	250.3	204.6	182.6	173.4	165.1	161.8	217.0	129.2	64.3	47.9	38.9	36.0	36.2
62,5°	145.5	108.8	86.7	74.0	66.0	64.6	214.2	129.0	73.8	58.1	41.2	33.5	34.8
65,0°	67.5	45.0	35.7	31.3	27.6	26.8	210.1	133.0	90.9	71.2	45.1	31.9	34.7
67,5°	26.8	20.8	18.5	17.5	16.8	16.4	208.5	148.3	118.6	81.6	45.1	29.9	33.7
70,0°	16.2	14.4	13.8	13.2	12.7	12.3	236.4	195.9	156.6	87.0	37.9	28.1	32.3
72,5°	12.8	11.4	10.8	10.2	9.6	9.4	409.6	322.7	215.6	78.7	30.0	27.9	29.6
75,0°	9.7	8.6	7.9	7.5	7.1	7.0	414.6	266.9	148.4	43.3	26.7	27.7	25.5
77,5°	6.7	5.8	5.3	5.0	4.7	4.6	158.3	92.5	50.4	16.7	18.7	22.5	20.1
80,0°	4.0	3.5	3.0	2.9	2.7	2.7	44.1	27.3	12.5	8.6	10.0	12.3	11.7
82,5°	2.2	2.1	1.8	1.8	1.7	1.7	10.0	6.4	4.8	4.8	5.1	5.3	5.2
85,0°	1.0	1.0	1.0	0.8	0.8	1.0	2.8	2.8	2.8	2.7	2.5	2.4	2.2
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7R37M08LB</b> <b>EAN: 4069025163912</b>	<b>LP number</b> <b>59535_159</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeCO</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	0.4	0.4
2,5°	272.2	271.8	271.0	270.4	269.8	269.5	269.2	268.7	268.6	268.6	268.5	3.3	3.7
5,0°	261.5	258.9	256.5	253.9	251.4	249.4	247.6	246.1	245.0	244.4	244.3	6.5	10.2
7,5°	244.8	238.5	232.3	226.9	221.6	217.2	213.5	210.6	208.6	207.3	206.8	9.4	19.6
10,0°	221.4	211.9	203.1	194.5	186.1	179.5	174.5	171.0	168.5	167.1	166.7	12.0	31.6
12,5°	195.0	181.2	169.8	160.0	151.3	144.4	138.5	134.0	131.0	128.9	128.4	14.2	45.8
15,0°	167.9	153.5	140.2	128.2	117.7	109.1	102.7	98.6	95.9	94.7	94.3	16.3	62.0
17,5°	142.2	124.6	108.6	95.7	87.6	83.9	83.1	83.8	84.7	85.5	85.9	18.4	80.4
20,0°	116.6	96.4	83.1	78.2	78.6	81.3	84.5	87.3	89.3	90.3	90.9	20.8	101.2
22,5°	89.5	75.2	72.6	76.0	80.9	85.1	88.4	90.5	91.6	91.8	92.2	23.2	124.4
25,0°	71.4	68.6	73.3	79.7	85.5	88.8	90.0	89.7	88.7	87.4	87.1	25.6	150.0
27,5°	64.7	70.1	78.6	86.0	89.6	90.0	87.9	84.8	81.5	78.7	77.4	28.0	178.0
30,0°	64.8	74.0	83.0	87.6	87.7	84.1	78.9	73.3	68.2	64.5	62.9	30.3	208.3
32,5°	67.5	77.3	83.7	84.9	81.4	75.6	69.2	63.0	57.6	53.9	52.5	32.7	241.0
35,0°	69.5	77.5	81.3	79.5	74.6	69.1	63.6	59.6	56.8	55.4	54.7	35.2	276.2
37,5°	66.9	72.0	72.9	70.1	66.3	64.1	63.0	61.0	57.8	55.1	54.2	37.4	313.5
40,0°	61.1	63.3	62.3	60.6	62.2	62.0	58.2	55.0	53.0	51.5	51.0	39.1	352.7
42,5°	56.2	56.2	55.5	58.5	59.0	54.9	52.9	51.4	50.1	49.0	48.4	40.8	393.5
45,0°	53.0	52.6	55.5	57.6	52.9	50.7	49.0	47.7	46.7	46.0	45.7	42.7	436.2
47,5°	51.0	53.0	57.0	52.2	48.3	46.4	45.0	44.0	43.2	42.7	42.6	45.2	481.4
50,0°	50.3	54.8	53.7	46.7	43.9	42.3	41.2	40.5	39.8	39.4	39.2	48.5	529.9
52,5°	49.2	54.1	48.4	42.2	39.7	38.5	37.5	36.4	35.8	35.3	35.3	52.1	582.0
55,0°	47.2	51.3	42.8	37.7	35.7	34.3	33.3	32.8	32.2	31.9	31.9	53.0	634.9
57,5°	46.8	46.6	37.7	33.1	31.7	30.7	29.9	29.5	29.0	28.8	28.8	50.6	685.5
60,0°	45.6	41.7	32.2	29.5	28.5	27.6	26.4	25.5	24.7	24.2	24.2	46.4	731.9
62,5°	43.5	35.8	28.2	26.2	24.8	23.3	21.9	20.9	20.2	19.7	19.8	41.6	773.6
65,0°	39.3	31.9	24.7	22.4	20.8	19.0	17.8	17.1	16.4	16.2	16.2	38.9	812.4
67,5°	35.7	27.6	20.9	18.1	16.8	15.5	14.4	13.8	13.5	13.3	13.3	40.2	852.7
70,0°	31.4	23.6	17.7	15.1	13.8	12.3	11.5	10.8	10.3	9.9	9.7	49.7	902.3
72,5°	26.8	19.7	14.6	12.0	10.5	9.1	8.2	7.7	7.3	6.8	6.8	52.1	954.4
75,0°	22.1	15.8	11.6	9.2	7.7	6.8	5.8	5.3	4.8	4.6	4.6	30.6	985.0
77,5°	16.3	11.4	8.2	6.4	5.3	4.4	3.7	3.1	2.9	2.7	2.7	10.4	995.4
80,0°	9.8	6.7	5.0	4.0	3.1	2.5	2.1	1.7	1.3	1.0	1.0	2.9	998.4
82,5°	4.5	3.5	2.8	2.1	1.6	1.3	1.1	1.0	0.7	0.6	0.5	1.0	999.3
85,0°	1.9	1.7	1.5	1.1	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.4	999.8
87,5°	1.2	1.1	0.8	0.8	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7R37M08LB</b> <b>EAN: 4069025163912</b>	<b>LP number</b> 59535_159
---	--	-------------------------------

siteco

Dimming levels table		environmental temperature: 25°C					
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average	
100	254	254	12450	98.3	100.9	99.6	
95	239	252	11835	92.3	94.7	93.5	
90	224	249	11207	86.5	88.7	87.6	
85	209	247	10561	80.5	82.6	81.6	
80	195	244	9943	75.1	77.0	76.0	
75	181	242	9318	69.6	71.4	70.5	
70	168	239	8726	64.6	66.3	65.4	
65	154	236	8077	59.3	60.8	60.0	
60	141	232	7462	54.4	55.7	55.0	
55	128	229	6835	49.4	50.7	50.0	
50	116	225	6247	45.0	46.1	45.6	
45	103	221	5599	40.2	41.1	40.7	
40	91	216	4991	35.8	36.6	36.2	
35	79	211	4373	31.3	32.1	31.7	
30	67	205	3745	26.9	27.5	27.2	
25	55	198	3108	22.5	23.1	22.8	
20	44	190	2514	18.6	19.0	18.8	
15	32	178	1858	14.2	14.5	14.4	
14	29	175	1693	13.1	13.4	13.2	

Dimming levels table		environmental temperature: 5°C					
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average	
100	254	254	12810	99.5	102.1	100.8	
95	239	252	12160	93.4	95.8	94.6	
90	225	250	11544	87.9	90.2	89.1	
85	210	247	10869	81.9	84.1	83.0	
80	196	245	10227	76.5	78.4	77.4	
75	183	242	9623	71.3	73.2	72.2	
70	169	239	8963	65.9	67.6	66.8	
65	156	236	8339	60.9	62.4	61.6	
60	143	233	7706	55.8	57.3	56.6	
55	130	229	7063	50.9	52.2	51.6	
50	117	226	6409	46.0	47.1	46.6	
45	104	221	5745	41.1	42.1	41.6	
40	92	217	5123	36.6	37.5	37.0	
35	80	212	4493	32.1	32.9	32.5	
30	68	206	3854	27.6	28.3	28.0	
25	56	199	3205	23.2	23.7	23.4	
20	44	190	2547	18.9	19.3	19.1	
15	33	179	1937	14.8	15.2	15.0	
13	29	175	1713	13.3	13.6	13.4	

## Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7R37M08LB</b> <b>EAN: 4069025163912</b>	<b>LP number</b> 59535_159
---	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12640	98.8	101.5	100.2
95	239	252	12006	92.9	95.2	94.1
90	224	249	11362	87.0	89.2	88.1
85	210	247	10745	81.4	83.5	82.4
80	196	245	10115	76.0	77.9	77.0
75	182	242	9476	70.4	72.3	71.4
70	168	239	8826	65.0	66.7	65.8
65	155	236	8212	60.0	61.6	60.8
60	142	233	7588	55.0	56.5	55.8
55	129	229	6953	50.2	51.4	50.8
50	116	225	6306	45.3	46.4	45.8
45	104	221	5700	40.8	41.8	41.3
40	91	216	5034	36.0	36.8	36.4
35	79	211	4409	31.5	32.3	31.9
30	67	205	3774	27.1	27.7	27.4
25	56	199	3185	23.0	23.5	23.2
20	44	190	2531	18.7	19.1	18.9
15	32	178	1870	14.3	14.6	14.4
13	29	175	1704	13.2	13.5	13.4

**Photometric test report**

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7R37M08LB</b> <b>EAN: 4069025163912</b>	<b>LP number</b> <b>59535_159</b>
---	--	--------------------------------------

**Luminousfluxs table** **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	12450.0	98.3
5.0	12810.0	99.5
15.0	12640.0	98.8