


Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
Version	post-top or side-entry mounting, NEMA 7 pin (DALI) + Zhaga down	serial documentation 18.01.2024
Optic	asymmetric, extremely wide distribution (P0.8a), Back Light Control (BLC)	
Cover	toughened safety glass	
Lamps	LED 3000 K CRI ≥ 70	
Controlgear	EVG-Smart Interface	
Rated values	Net luminous flux = 15870 lm Power consumption = 136.0 W Luminous efficacy = 116.7 lm/W	



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 1022 cd/klm**

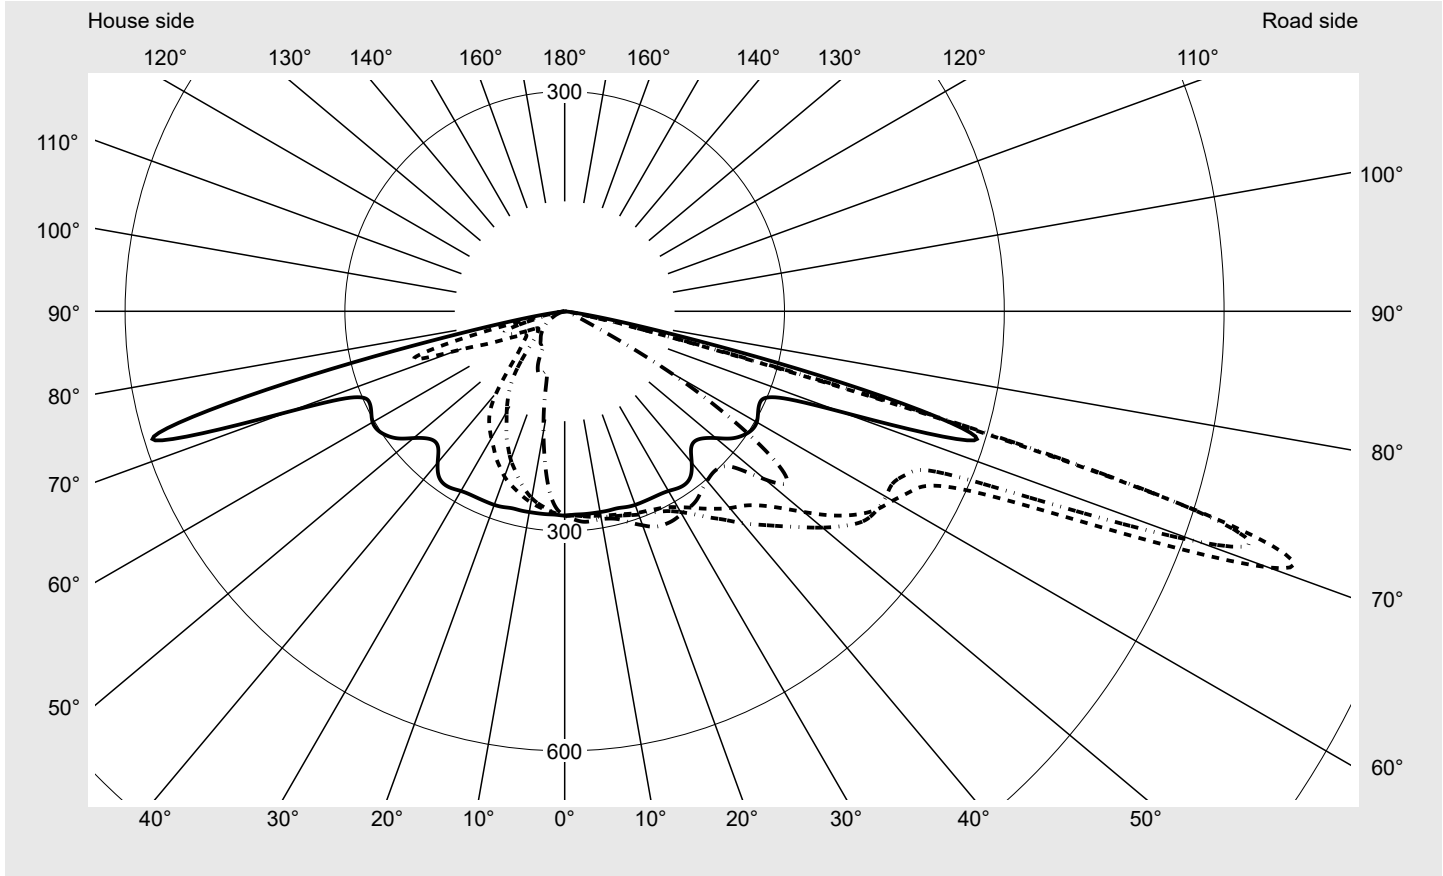

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	1022.3
Imax 80°	56.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
---	--	-------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

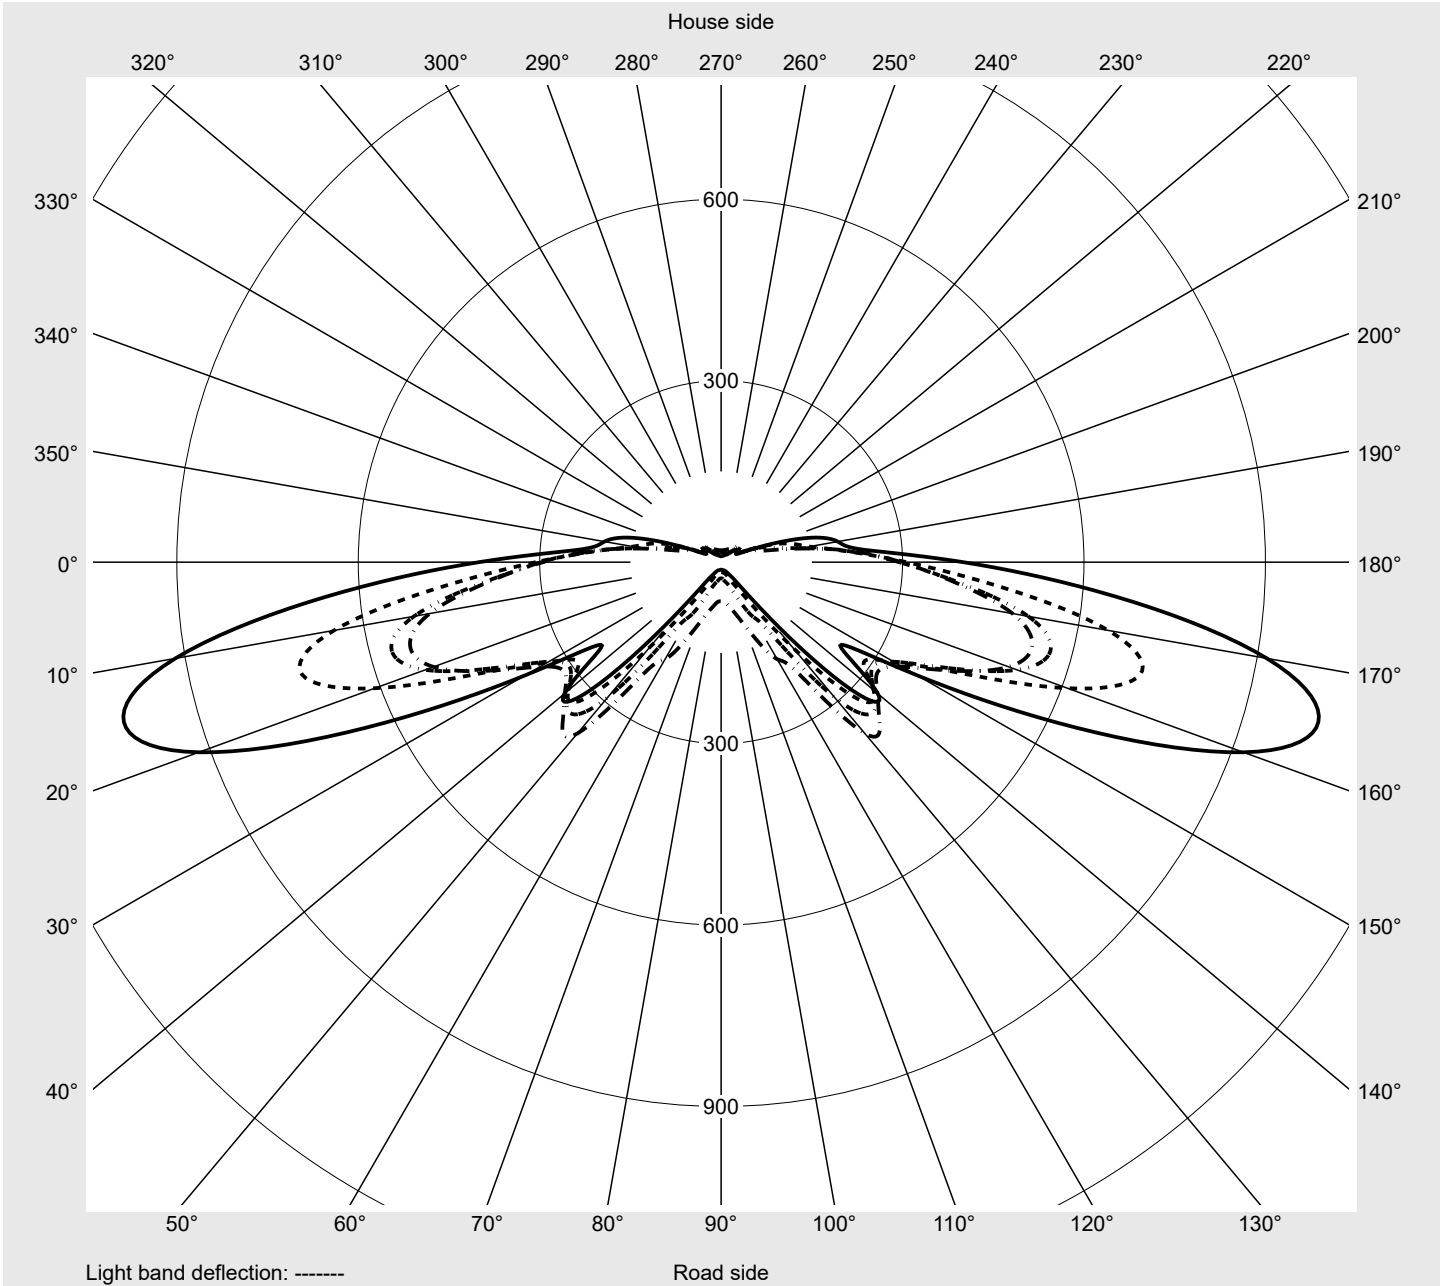

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	277.9	277.8	278.3	278.5	279.1	279.5	279.7	280.3	281.1	281.1	281.8	282.0	282.5
5,0°	278.0	278.0	278.8	279.6	280.7	281.8	282.5	283.4	284.3	284.7	285.3	285.7	286.3
7,5°	278.2	278.8	279.7	281.6	283.0	284.3	285.2	285.8	286.5	286.6	286.8	287.0	287.2
10,0°	278.3	279.3	281.1	283.2	284.8	286.1	286.8	287.1	287.4	287.5	287.6	287.5	287.6
12,5°	278.4	280.6	282.9	285.1	287.1	288.1	288.1	288.3	288.6	288.3	288.2	288.3	288.1
15,0°	278.3	281.8	284.2	287.0	288.9	289.7	290.4	290.4	290.4	290.5	290.7	291.2	291.5
17,5°	280.1	284.2	287.0	289.9	291.8	292.6	293.2	293.3	294.2	295.6	296.5	297.9	299.1
20,0°	281.2	286.5	289.9	292.7	295.2	296.4	297.4	298.7	300.7	302.2	304.8	306.3	307.6
22,5°	281.2	288.0	291.8	294.7	298.0	300.7	303.7	306.7	309.6	312.0	314.3	316.4	318.0
25,0°	281.2	289.0	293.5	297.6	302.0	305.6	310.8	316.1	320.1	323.0	325.6	327.5	328.0
27,5°	281.6	290.6	296.3	301.5	307.4	313.2	319.9	326.8	332.3	336.2	338.0	338.5	336.9
30,0°	283.2	294.4	301.5	308.8	316.5	324.6	332.6	340.2	345.8	350.2	351.0	348.3	344.3
32,5°	286.5	299.7	308.4	317.7	328.5	340.0	349.8	357.0	362.1	365.5	364.2	358.0	349.5
35,0°	287.6	303.8	315.5	328.7	343.4	357.5	368.6	376.7	381.4	382.7	377.3	366.1	353.1
37,5°	282.8	302.1	319.8	339.7	358.7	375.8	388.1	395.7	398.9	396.8	386.6	370.4	354.4
40,0°	269.7	294.5	321.2	350.6	377.6	398.0	410.2	417.0	415.9	407.6	392.5	373.6	355.1
42,5°	255.3	287.6	322.7	360.0	395.2	420.8	432.6	434.9	428.7	414.1	394.4	373.9	354.4
45,0°	251.0	289.5	331.0	374.7	414.6	444.9	453.6	450.5	436.8	415.6	393.7	371.5	352.8
47,5°	256.6	303.0	350.2	396.9	436.1	462.6	468.6	458.1	439.5	412.5	387.5	369.7	355.1
50,0°	269.2	324.0	378.1	426.2	459.3	475.7	475.8	456.8	430.3	401.5	381.2	373.1	369.5
52,5°	285.2	346.9	408.8	457.5	481.0	483.4	467.9	440.5	409.6	388.7	382.1	388.8	404.4
55,0°	295.9	364.8	434.7	484.0	498.6	480.9	443.0	412.5	385.1	377.3	391.6	422.7	440.8
57,5°	302.2	378.2	457.4	504.1	505.0	463.7	409.7	376.6	362.7	372.1	410.7	405.5	386.0
60,0°	302.7	385.2	474.2	517.0	506.3	445.5	376.2	342.3	346.6	374.1	408.1	323.4	289.9
62,5°	297.6	389.4	489.3	532.5	506.1	424.7	345.6	316.1	337.3	370.1	369.8	228.7	185.2
65,0°	294.2	397.3	515.7	563.9	520.7	414.1	329.1	304.9	329.7	352.9	292.0	146.3	103.0
67,5°	306.5	462.0	650.1	717.4	609.4	431.9	331.0	288.1	329.0	319.8	183.6	76.0	42.3
70,0°	400.3	655.6	916.4	1022.3	919.1	647.3	374.3	240.7	338.2	282.9	84.5	28.5	20.0
72,5°	586.0	762.4	853.4	904.4	899.0	672.4	361.6	293.9	353.5	133.4	22.0	16.9	14.5
75,0°	449.7	381.0	325.6	308.5	339.8	261.0	278.4	408.8	241.2	30.0	14.0	12.7	10.9
77,5°	187.6	136.4	104.4	83.4	66.4	31.3	81.0	143.9	55.8	10.9	9.4	9.1	7.9
80,0°	56.2	38.7	28.1	20.2	12.5	7.1	6.9	10.5	5.9	5.4	6.4	5.7	5.0
82,5°	9.6	8.1	6.9	5.8	4.4	3.9	3.4	3.0	2.7	2.5	2.7	2.4	2.4
85,0°	2.7	2.5	2.3	2.2	1.9	1.7	1.6	1.6	1.3	1.3	1.2	1.1	1.0
87,5°	1.5	1.3	1.2	1.2	1.1	1.0	1.0	0.8	0.8	0.8	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	282.9	283.2	283.5	283.8	284.1	284.2	277.4	276.4	276.1	275.6	274.5	273.9	273.1
5,0°	286.6	287.0	287.2	287.6	288.0	288.3	277.0	274.5	272.6	270.8	268.5	266.3	264.1
7,5°	287.4	287.5	287.8	288.2	288.3	288.6	276.2	272.6	269.3	265.7	261.4	256.5	251.1
10,0°	287.2	287.1	287.2	287.7	288.3	288.1	275.3	270.3	265.0	258.9	250.7	242.0	231.8
12,5°	288.1	288.2	288.7	289.2	289.4	289.8	274.1	267.4	259.7	249.5	236.8	222.9	208.7
15,0°	292.0	292.1	292.7	293.8	294.2	294.4	273.1	264.3	253.4	238.6	221.3	203.4	184.9
17,5°	299.9	300.3	300.8	301.6	302.6	302.8	273.2	261.7	247.2	226.6	204.9	181.7	160.7
20,0°	308.0	308.8	309.2	309.9	310.3	310.8	273.2	259.9	240.1	215.4	188.9	162.4	139.4
22,5°	318.6	318.4	318.1	317.7	317.8	318.3	271.5	255.2	230.6	201.6	170.3	143.2	114.9
25,0°	327.4	325.7	323.3	321.8	320.7	321.2	269.5	249.4	221.2	187.9	153.1	121.8	90.5
27,5°	334.3	330.2	326.2	323.3	321.5	321.5	266.7	243.2	210.0	171.9	135.7	99.1	71.1
30,0°	339.2	333.1	326.9	322.2	319.5	319.3	265.3	237.9	200.2	158.3	118.4	79.9	62.3
32,5°	341.5	333.3	325.9	320.7	318.1	317.3	264.9	232.9	190.4	145.0	101.3	66.5	60.1
35,0°	342.5	333.9	325.9	318.9	315.1	314.2	263.0	225.7	179.7	131.6	85.9	59.6	60.6
37,5°	342.0	331.6	322.7	314.3	309.4	307.4	254.3	213.3	165.2	116.7	73.0	56.4	60.0
40,0°	340.1	328.2	319.5	310.6	304.4	302.4	235.8	192.1	144.6	99.3	62.9	54.2	57.1
42,5°	337.2	325.3	318.1	307.7	301.1	299.2	216.4	169.2	122.0	81.3	56.4	52.1	54.2
45,0°	337.1	325.6	317.5	309.4	303.1	301.1	203.9	150.0	103.2	66.2	51.0	50.1	52.0
47,5°	343.8	336.0	329.8	323.8	318.2	316.4	200.2	139.3	88.8	56.2	48.4	48.6	50.7
50,0°	367.8	368.7	368.6	364.8	359.1	357.0	204.6	135.1	79.1	49.7	47.4	49.0	50.6
52,5°	419.9	422.4	412.8	399.2	386.2	382.4	211.0	133.0	72.3	46.2	47.5	49.5	49.6
55,0°	424.6	395.0	374.2	359.3	344.6	341.1	216.4	132.7	66.2	43.9	45.5	46.9	45.5
57,5°	353.8	310.6	285.4	270.3	259.7	257.6	218.5	130.4	61.9	43.1	41.0	41.0	39.3
60,0°	250.3	204.6	182.6	173.4	165.1	161.8	217.0	129.2	64.3	47.9	38.9	36.0	36.2
62,5°	145.5	108.8	86.7	74.0	66.0	64.6	214.2	129.0	73.8	58.1	41.2	33.5	34.8
65,0°	67.5	45.0	35.7	31.3	27.6	26.8	210.1	133.0	90.9	71.2	45.1	31.9	34.7
67,5°	26.8	20.8	18.5	17.5	16.8	16.4	208.5	148.3	118.6	81.6	45.1	29.9	33.7
70,0°	16.2	14.4	13.8	13.2	12.7	12.3	236.4	195.9	156.6	87.0	37.9	28.1	32.3
72,5°	12.8	11.4	10.8	10.2	9.6	9.4	409.6	322.7	215.6	78.7	30.0	27.9	29.6
75,0°	9.7	8.6	7.9	7.5	7.1	7.0	414.6	266.9	148.4	43.3	26.7	27.7	25.5
77,5°	6.7	5.8	5.3	5.0	4.7	4.6	158.3	92.5	50.4	16.7	18.7	22.5	20.1
80,0°	4.0	3.5	3.0	2.9	2.7	2.7	44.1	27.3	12.5	8.6	10.0	12.3	11.7
82,5°	2.2	2.1	1.8	1.8	1.7	1.7	10.0	6.4	4.8	4.8	5.1	5.3	5.2
85,0°	1.0	1.0	1.0	0.8	0.8	1.0	2.8	2.8	2.8	2.7	2.5	2.4	2.2
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	0.4	0.4
2,5°	272.2	271.8	271.0	270.4	269.8	269.5	269.2	268.7	268.6	268.6	268.5	3.3	3.7
5,0°	261.5	258.9	256.5	253.9	251.4	249.4	247.6	246.1	245.0	244.4	244.3	6.5	10.2
7,5°	244.8	238.5	232.3	226.9	221.6	217.2	213.5	210.6	208.6	207.3	206.8	9.4	19.6
10,0°	221.4	211.9	203.1	194.5	186.1	179.5	174.5	171.0	168.5	167.1	166.7	12.0	31.6
12,5°	195.0	181.2	169.8	160.0	151.3	144.4	138.5	134.0	131.0	128.9	128.4	14.2	45.8
15,0°	167.9	153.5	140.2	128.2	117.7	109.1	102.7	98.6	95.9	94.7	94.3	16.3	62.0
17,5°	142.2	124.6	108.6	95.7	87.6	83.9	83.1	83.8	84.7	85.5	85.9	18.4	80.4
20,0°	116.6	96.4	83.1	78.2	78.6	81.3	84.5	87.3	89.3	90.3	90.9	20.8	101.2
22,5°	89.5	75.2	72.6	76.0	80.9	85.1	88.4	90.5	91.6	91.8	92.2	23.2	124.4
25,0°	71.4	68.6	73.3	79.7	85.5	88.8	90.0	89.7	88.7	87.4	87.1	25.6	150.0
27,5°	64.7	70.1	78.6	86.0	89.6	90.0	87.9	84.8	81.5	78.7	77.4	28.0	178.0
30,0°	64.8	74.0	83.0	87.6	87.7	84.1	78.9	73.3	68.2	64.5	62.9	30.3	208.3
32,5°	67.5	77.3	83.7	84.9	81.4	75.6	69.2	63.0	57.6	53.9	52.5	32.7	241.0
35,0°	69.5	77.5	81.3	79.5	74.6	69.1	63.6	59.6	56.8	55.4	54.7	35.2	276.2
37,5°	66.9	72.0	72.9	70.1	66.3	64.1	63.0	61.0	57.8	55.1	54.2	37.4	313.5
40,0°	61.1	63.3	62.3	60.6	62.2	62.0	58.2	55.0	53.0	51.5	51.0	39.1	352.7
42,5°	56.2	56.2	55.5	58.5	59.0	54.9	52.9	51.4	50.1	49.0	48.4	40.8	393.5
45,0°	53.0	52.6	55.5	57.6	52.9	50.7	49.0	47.7	46.7	46.0	45.7	42.7	436.2
47,5°	51.0	53.0	57.0	52.2	48.3	46.4	45.0	44.0	43.2	42.7	42.6	45.2	481.4
50,0°	50.3	54.8	53.7	46.7	43.9	42.3	41.2	40.5	39.8	39.4	39.2	48.5	529.9
52,5°	49.2	54.1	48.4	42.2	39.7	38.5	37.5	36.4	35.8	35.3	35.3	52.1	582.0
55,0°	47.2	51.3	42.8	37.7	35.7	34.3	33.3	32.8	32.2	31.9	31.9	53.0	634.9
57,5°	46.8	46.6	37.7	33.1	31.7	30.7	29.9	29.5	29.0	28.8	28.8	50.6	685.5
60,0°	45.6	41.7	32.2	29.5	28.5	27.6	26.4	25.5	24.7	24.2	24.2	46.4	731.9
62,5°	43.5	35.8	28.2	26.2	24.8	23.3	21.9	20.9	20.2	19.7	19.8	41.6	773.6
65,0°	39.3	31.9	24.7	22.4	20.8	19.0	17.8	17.1	16.4	16.2	16.2	38.9	812.4
67,5°	35.7	27.6	20.9	18.1	16.8	15.5	14.4	13.8	13.5	13.3	13.3	40.2	852.7
70,0°	31.4	23.6	17.7	15.1	13.8	12.3	11.5	10.8	10.3	9.9	9.7	49.7	902.3
72,5°	26.8	19.7	14.6	12.0	10.5	9.1	8.2	7.7	7.3	6.8	6.8	52.1	954.4
75,0°	22.1	15.8	11.6	9.2	7.7	6.8	5.8	5.3	4.8	4.6	4.6	30.6	985.0
77,5°	16.3	11.4	8.2	6.4	5.3	4.4	3.7	3.1	2.9	2.7	2.7	10.4	995.4
80,0°	9.8	6.7	5.0	4.0	3.1	2.5	2.1	1.7	1.3	1.0	1.0	2.9	998.4
82,5°	4.5	3.5	2.8	2.1	1.6	1.3	1.1	1.0	0.7	0.6	0.5	1.0	999.3
85,0°	1.9	1.7	1.5	1.1	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.4	999.8
87,5°	1.2	1.1	0.8	0.8	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
---	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	15870	136.0	142.3	139.2
95	237	251	15056	126.7	132.6	129.6
90	221	249	14262	118.2	123.6	120.9
85	206	246	13489	110.2	115.3	112.8
80	191	244	12686	102.3	106.9	104.6
75	177	241	11914	94.9	99.2	97.1
70	163	238	11123	87.7	91.5	89.6
65	149	234	10303	80.3	83.9	82.1
60	136	231	9519	73.7	76.8	75.2
55	123	227	8715	67.0	69.8	68.4
50	111	224	7954	60.8	63.4	62.1
45	98	219	7110	54.2	56.5	55.4
40	87	215	6375	48.7	50.7	49.7
35	75	209	5560	42.5	44.2	43.4
30	63	203	4728	36.5	37.9	37.2
25	52	196	3950	30.9	32.1	31.5
20	41	187	3155	25.5	26.4	26.0
15	30	176	2345	20.0	20.7	20.4
13	27	172	2122	18.5	19.1	18.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	16410	137.5	143.9	140.7
95	238	252	15587	128.6	134.7	131.6
90	223	249	14794	120.6	126.1	123.4
85	208	247	13975	112.6	117.8	115.2
80	193	244	13132	104.6	109.3	107.0
75	179	241	12324	97.2	101.5	99.4
70	165	238	11501	89.8	93.7	91.8
65	151	235	10650	82.4	86.1	84.2
60	138	232	9840	75.6	79.0	77.3
55	125	228	9012	68.9	71.9	70.4
50	113	224	8230	62.7	65.3	64.0
45	100	220	7366	56.0	58.3	57.2
40	88	215	6547	49.9	51.9	50.9
35	76	210	5715	43.6	45.4	44.5
30	65	204	4938	38.0	39.5	38.8
25	53	197	4076	31.9	33.1	32.5
20	42	188	3270	26.4	27.4	26.9
15	31	177	2449	20.9	21.5	21.2
13	27	172	2147	18.8	19.5	19.2

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
---	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	16160	136.7	143.1	139.9
95	238	252	15364	127.9	133.9	130.9
90	222	249	14543	119.4	124.9	122.2
85	207	247	13747	111.3	116.5	113.9
80	192	244	12922	103.4	108.1	105.8
75	178	241	12131	96.0	100.3	98.2
70	164	238	11322	88.7	92.6	90.6
65	150	235	10488	81.4	85.0	83.2
60	137	231	9688	74.6	77.9	76.2
55	124	228	8871	67.9	70.8	69.4
50	112	224	8099	61.7	64.4	63.0
45	99	219	7244	55.1	57.4	56.2
40	87	215	6433	49.0	51.0	50.0
35	76	210	5677	43.3	45.1	44.2
30	64	204	4837	37.2	38.7	38.0
25	53	197	4053	31.7	32.9	32.3
20	42	188	3253	26.2	27.1	26.6
15	31	177	2436	20.7	21.3	21.0
13	27	172	2137	18.7	19.3	19.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7R37M08MB EAN: 4069025163929	LP number 59535_103
---	--	--------------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	15870.0	136.0
5.0	16410.0	137.5
15.0	16160.0	136.7