


Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
	Version post-top or side-entry mounting, NEMA 7 pin (DALI) Optic asymmetric, extremely wide distribution (P0.8a G) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Plus Rated values Net luminous flux = 23910 lm Power consumption = 151.2 W Luminous efficacy = 158.1 lm/W	serial documentation 18.01.2024





Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 856 cd/klm**

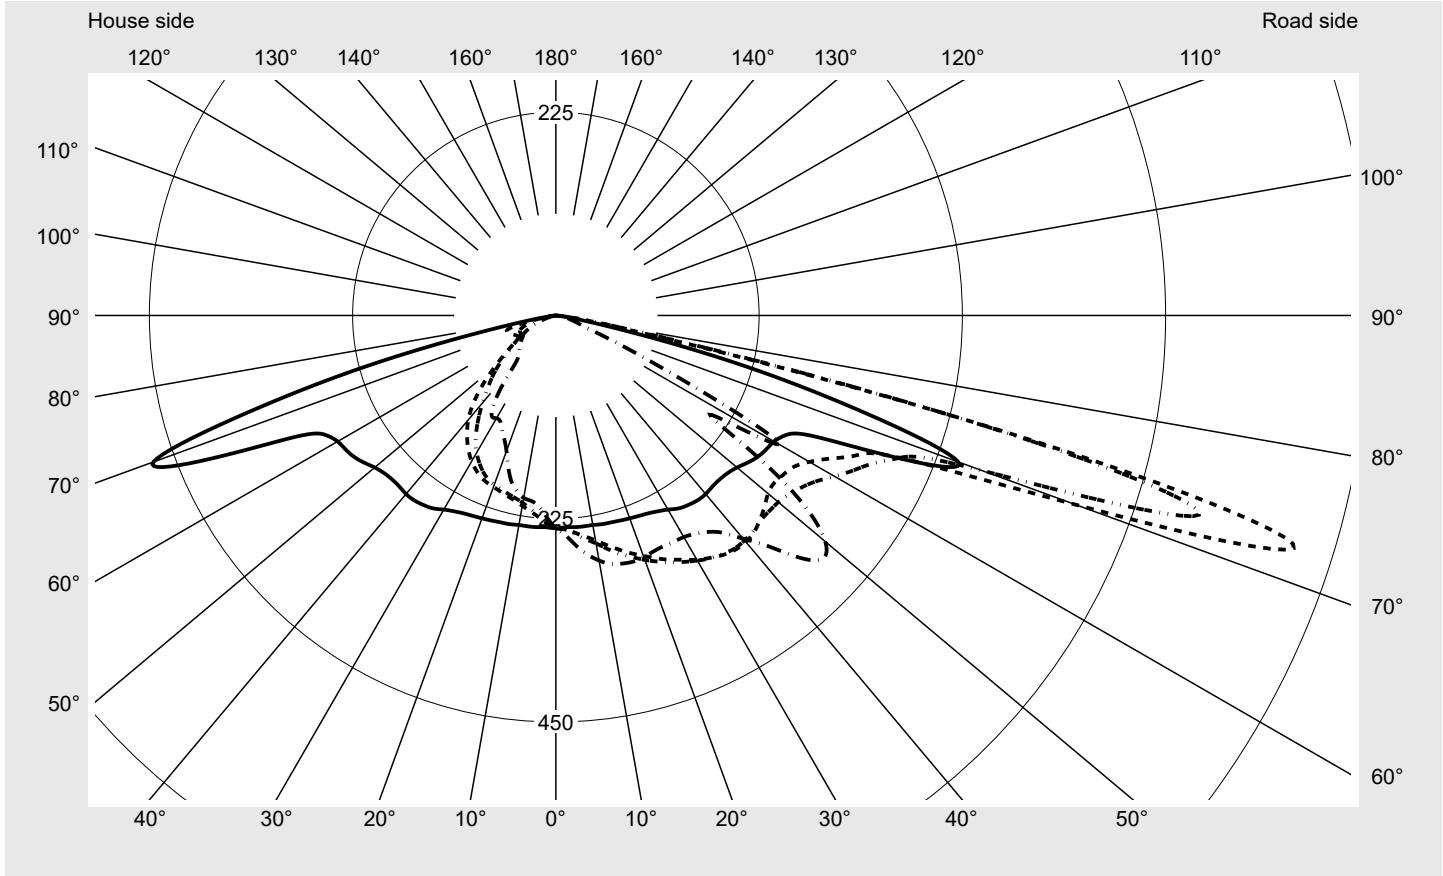

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	618.8
Imax 80°	68.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
---	--	------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

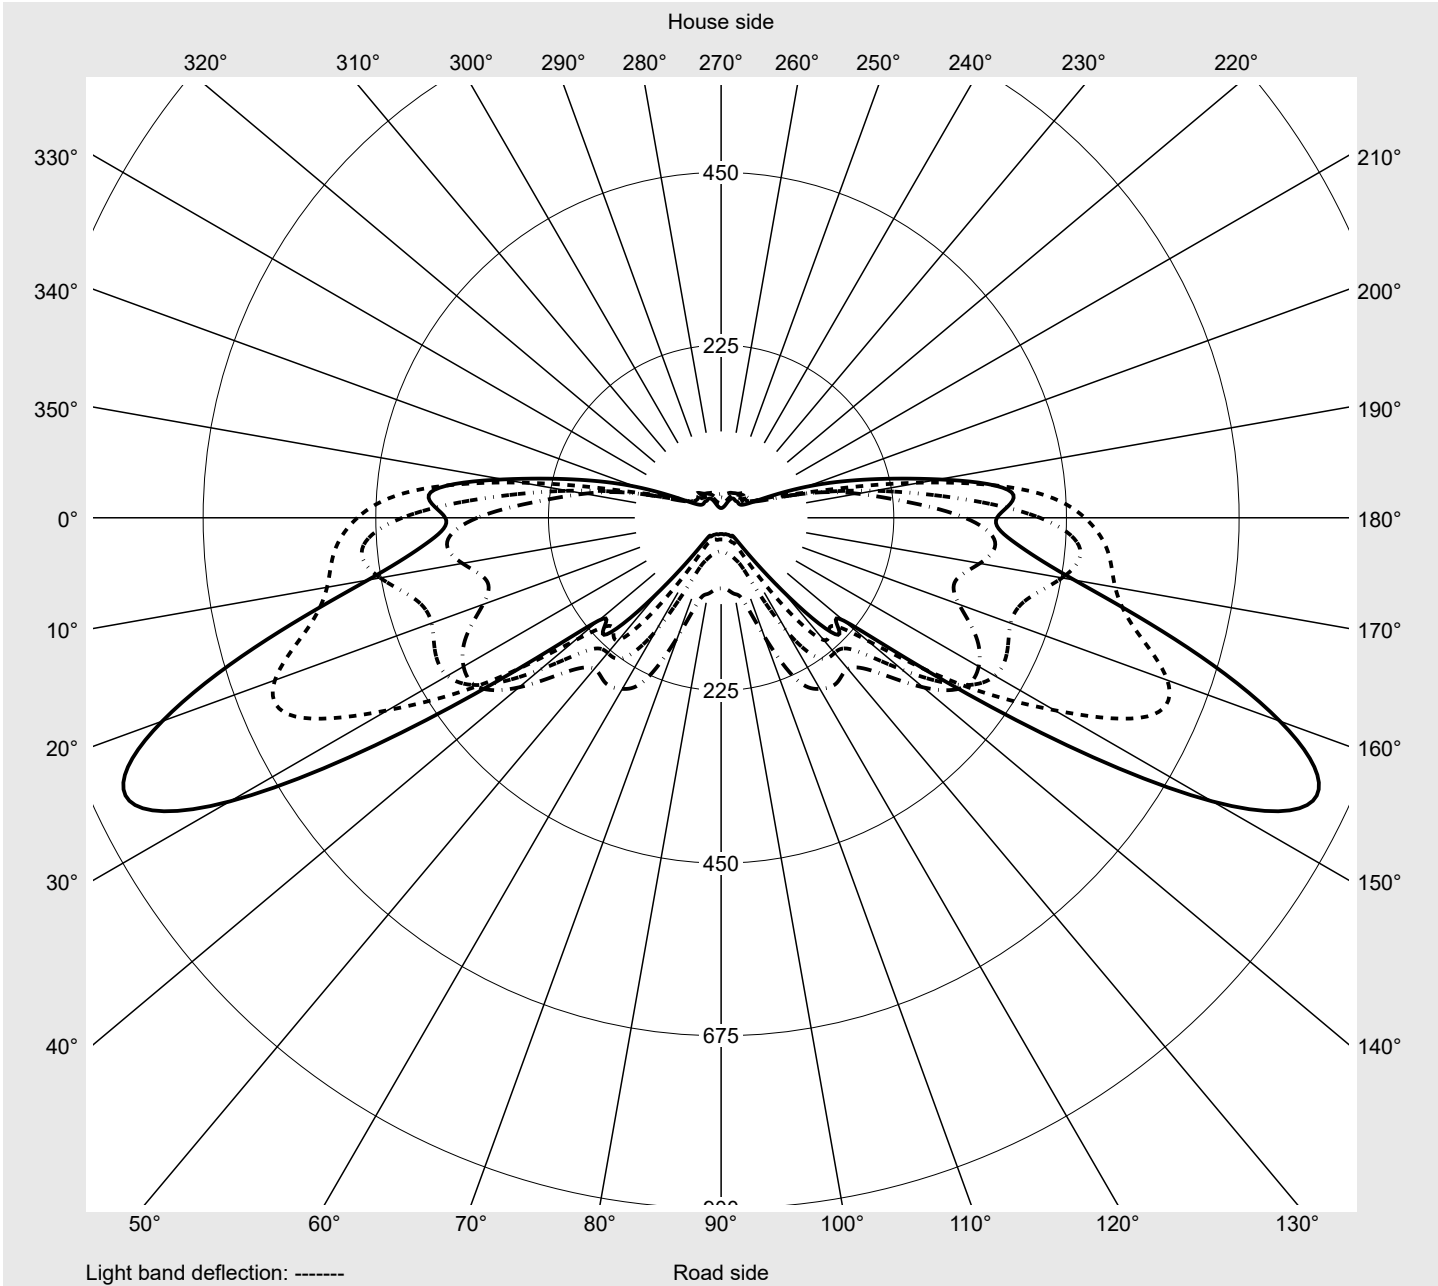

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	234.7	235.2	235.9	236.3	236.6	236.6	237.1	238.2	239.1	239.6	240.2	240.8	241.4
5,0°	235.2	235.6	236.3	237.6	239.5	241.3	243.0	244.7	246.6	248.1	249.5	251.0	252.0
7,5°	235.5	236.3	238.0	240.8	243.9	246.8	249.7	252.2	254.9	256.9	258.9	260.6	262.1
10,0°	235.5	236.9	240.3	244.4	248.7	252.8	256.3	259.5	262.8	265.6	267.6	269.4	270.9
12,5°	236.6	239.6	244.5	249.8	255.3	260.4	264.8	268.6	271.6	274.3	276.7	278.4	279.6
15,0°	237.1	242.1	248.6	255.9	262.4	268.1	272.9	276.0	279.3	281.8	283.4	284.4	285.0
17,5°	238.0	245.1	253.5	262.0	269.7	275.9	280.4	284.2	286.5	288.0	288.8	288.8	288.4
20,0°	239.0	248.9	259.1	268.7	277.4	283.1	288.0	290.8	292.2	293.0	292.9	292.1	290.8
22,5°	240.2	252.1	264.0	275.5	284.7	291.0	294.8	297.0	297.3	297.0	295.8	293.9	291.9
25,0°	241.7	256.4	269.7	282.6	291.9	298.2	301.4	303.0	302.4	300.4	297.9	295.3	292.3
27,5°	244.4	261.7	277.2	290.5	299.8	304.8	307.5	308.4	306.8	303.6	299.8	296.2	293.4
30,0°	248.2	267.9	285.5	299.1	307.5	312.2	313.2	312.7	310.3	306.3	302.1	298.3	295.0
32,5°	253.2	275.1	294.8	308.3	315.3	318.1	318.6	316.5	312.9	309.0	305.2	301.4	299.1
35,0°	256.0	280.7	302.4	316.0	321.9	323.5	322.2	319.1	315.4	312.5	309.8	307.8	305.7
37,5°	257.8	284.8	307.2	321.0	325.8	326.7	325.1	321.5	317.8	316.2	316.4	317.1	315.6
40,0°	258.0	287.5	310.2	322.7	326.9	327.3	325.0	322.7	322.1	322.8	327.0	330.8	329.2
42,5°	256.7	287.7	310.0	321.3	324.3	325.0	323.6	324.2	327.6	332.7	340.5	346.4	346.9
45,0°	256.6	288.1	308.0	315.7	318.1	319.6	320.7	326.4	335.0	346.1	357.7	365.7	371.4
47,5°	258.2	288.9	305.8	309.5	309.7	313.4	320.5	332.2	346.1	362.6	377.2	387.9	396.1
50,0°	261.8	290.2	302.3	301.0	300.0	306.7	321.5	340.0	358.4	378.5	396.1	408.8	416.2
52,5°	267.6	293.4	300.8	295.4	293.1	304.6	325.3	350.3	370.6	391.3	406.9	415.8	411.4
55,0°	272.8	296.9	299.8	291.5	291.2	307.3	331.9	362.0	382.3	398.0	404.3	399.0	374.0
57,5°	276.0	299.2	298.8	289.2	292.4	312.1	341.7	374.1	390.1	391.8	379.5	349.4	309.6
60,0°	279.0	303.6	299.5	289.6	297.1	324.2	356.3	384.7	389.5	368.9	333.7	295.4	269.7
62,5°	286.9	315.3	307.8	295.1	308.6	343.0	371.4	388.3	374.0	327.5	286.9	271.6	282.6
65,0°	317.6	358.3	342.3	316.4	330.0	366.6	387.6	385.2	343.7	283.6	257.0	262.7	257.4
67,5°	415.5	469.6	451.1	412.1	401.5	411.4	411.9	379.6	308.1	243.4	229.9	223.3	170.3
70,0°	474.0	505.9	521.5	558.0	618.8	612.6	501.5	376.0	249.0	200.9	208.1	134.9	52.2
72,5°	359.4	385.8	467.5	612.6	774.9	856.4	739.2	430.1	208.5	215.7	123.1	38.5	28.0
75,0°	217.0	235.1	244.0	284.5	439.0	598.5	574.8	446.3	365.7	173.9	47.3	23.6	20.9
77,5°	84.6	127.6	114.0	114.9	138.6	182.9	201.9	296.7	316.9	127.3	20.5	18.5	15.7
80,0°	25.9	36.3	41.1	42.9	45.7	50.6	56.5	68.3	62.6	24.9	14.8	12.0	10.8
82,5°	6.9	8.1	10.0	11.8	13.7	15.5	15.0	11.3	10.2	7.8	6.8	7.0	6.3
85,0°	2.5	2.4	2.2	2.1	2.3	2.4	2.6	2.2	2.1	2.1	2.8	2.6	3.0
87,5°	1.3	1.2	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6
2,5°	242.1	242.7	242.9	243.3	243.6	243.6	233.9	232.6	232.1	231.5	230.4	229.4	228.4
5,0°	253.1	253.8	254.4	255.1	255.4	255.6	232.8	230.9	228.4	226.2	223.7	221.9	220.0
7,5°	263.4	264.5	265.3	266.1	266.5	266.8	232.3	228.5	224.9	221.8	218.5	216.0	213.6
10,0°	272.2	273.3	274.4	274.8	275.3	275.4	231.7	226.3	221.9	217.7	213.9	210.7	208.5
12,5°	280.0	280.4	281.1	281.0	281.6	281.7	231.8	225.0	219.1	214.2	210.0	207.1	205.4
15,0°	284.9	284.8	284.7	284.5	284.6	284.3	231.7	223.6	216.8	211.0	206.9	204.3	202.7
17,5°	287.8	286.8	286.2	285.8	285.7	285.6	231.9	222.1	214.2	208.2	204.3	201.6	199.7
20,0°	289.1	287.5	286.1	285.1	284.6	284.7	232.2	220.9	211.9	205.8	202.1	199.5	195.9
22,5°	289.6	286.9	284.9	283.4	282.6	282.7	231.3	219.0	209.4	203.8	200.0	196.1	190.4
25,0°	289.7	287.1	284.7	282.7	281.6	281.8	230.9	217.2	207.0	201.2	197.0	190.8	184.6
27,5°	290.7	288.1	285.3	283.5	282.2	282.4	231.0	215.8	204.8	198.3	192.1	183.6	175.8
30,0°	292.7	290.3	287.4	284.9	283.3	283.3	231.9	215.2	203.1	195.6	186.4	175.5	165.7
32,5°	296.9	294.2	290.9	288.1	286.8	286.7	233.9	215.1	201.6	192.3	179.1	165.3	151.3
35,0°	303.7	300.3	297.0	294.1	292.8	292.6	234.2	214.0	199.0	187.8	170.8	152.9	133.6
37,5°	312.8	310.0	307.3	304.8	303.4	303.2	232.9	211.7	195.9	181.7	161.4	139.5	117.8
40,0°	327.4	326.6	326.1	323.7	322.3	322.6	230.5	207.6	190.1	173.9	150.8	126.1	104.7
42,5°	348.4	350.5	351.2	347.7	345.8	345.6	225.6	199.9	180.2	161.5	137.5	113.5	93.3
45,0°	376.2	379.7	381.2	379.7	377.9	378.1	221.9	191.8	167.6	144.8	121.9	102.0	82.5
47,5°	401.7	405.0	405.0	402.3	399.3	399.3	220.2	184.5	154.2	125.7	104.8	91.2	73.0
50,0°	414.0	405.7	397.5	391.6	388.9	389.3	222.4	181.7	144.5	107.3	87.9	79.1	65.2
52,5°	392.1	370.1	354.6	348.1	346.3	348.2	226.1	181.6	137.5	92.3	73.1	67.3	60.3
55,0°	337.6	304.9	283.0	272.8	269.0	270.9	229.7	182.1	133.7	80.5	60.8	58.1	58.1
57,5°	271.5	242.0	225.0	215.8	207.8	205.0	230.4	179.6	129.0	73.2	51.8	51.4	55.3
60,0°	264.0	271.2	273.1	272.9	277.8	285.6	230.7	177.3	127.7	71.4	48.1	45.8	51.3
62,5°	283.7	274.7	259.6	225.0	192.5	183.4	228.9	175.1	126.4	72.1	48.4	43.7	47.7
65,0°	232.6	164.2	111.7	100.7	94.0	92.0	241.4	180.8	126.6	74.4	50.7	43.6	43.9
67,5°	86.7	59.5	51.2	47.7	44.6	43.8	302.9	202.7	126.9	77.2	53.7	43.0	39.8
70,0°	35.6	31.0	29.1	29.3	28.4	28.3	402.8	263.5	138.3	85.7	56.7	39.7	35.3
72,5°	25.1	23.4	22.0	22.1	21.3	21.1	380.0	288.0	191.6	118.1	56.9	34.6	30.1
75,0°	19.2	17.9	16.9	16.8	16.3	16.0	178.4	166.7	153.9	124.4	50.5	28.1	24.5
77,5°	13.8	13.2	12.3	11.9	11.7	11.6	58.4	60.7	56.1	51.7	29.3	20.7	18.3
80,0°	9.4	9.1	8.0	7.4	7.2	7.1	17.6	17.5	18.3	20.2	13.8	11.8	11.5
82,5°	5.4	5.0	4.4	4.2	4.0	3.9	5.6	5.5	5.2	6.9	6.1	6.0	5.6
85,0°	2.4	2.2	1.8	1.7	1.6	1.5	2.6	2.6	2.7	2.7	2.7	2.6	2.4
87,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.5	1.5	1.6	1.5	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	235.6	0.4	0.4
2,5°	227.4	226.8	226.2	225.5	225.0	224.7	224.4	224.1	224.0	223.9	223.9	2.8	3.1
5,0°	218.1	217.3	216.1	214.8	213.9	213.4	213.2	212.8	212.6	212.6	212.5	5.6	8.7
7,5°	211.6	210.3	209.1	208.2	207.6	207.5	207.3	207.2	207.2	207.3	207.2	8.4	17.1
10,0°	207.0	206.1	205.5	205.1	204.9	204.7	204.6	204.9	205.0	205.1	205.0	11.2	28.3
12,5°	204.1	203.5	203.0	202.4	201.7	200.9	200.0	199.6	199.3	199.3	199.1	14.1	42.5
15,0°	201.6	200.3	198.8	196.6	194.9	193.4	192.0	190.9	190.4	190.3	190.1	16.9	59.4
17,5°	197.6	194.5	191.9	189.0	186.6	184.3	181.5	179.0	177.3	175.8	175.4	19.6	79.0
20,0°	191.3	187.9	184.5	181.4	176.1	171.1	166.9	163.7	161.5	160.3	159.8	22.1	101.1
22,5°	185.4	180.9	176.0	169.2	162.6	157.4	153.6	151.3	149.9	149.1	148.8	24.5	125.6
25,0°	178.6	171.8	163.2	156.0	150.1	146.1	143.5	142.0	141.0	140.4	140.3	26.8	152.4
27,5°	168.5	157.6	148.3	141.8	137.3	134.4	133.2	132.8	132.7	132.6	132.8	29.0	181.4
30,0°	153.4	141.7	133.3	127.7	125.4	125.3	126.7	128.6	130.2	131.1	131.4	31.2	212.6
32,5°	135.3	124.0	116.0	113.0	114.6	119.0	124.7	129.0	131.2	131.8	132.0	33.4	246.0
35,0°	117.2	104.7	97.8	98.8	106.1	114.2	119.2	121.3	120.9	119.8	119.3	35.4	281.4
37,5°	100.8	87.9	83.5	88.3	95.8	100.2	101.2	100.7	99.3	97.6	96.9	37.0	318.4
40,0°	86.5	75.2	74.8	79.6	81.5	81.7	80.8	77.9	74.4	72.0	71.1	38.7	357.1
42,5°	75.9	69.2	71.0	71.3	71.3	70.4	67.5	65.1	63.3	62.1	61.6	40.7	397.8
45,0°	68.4	67.4	67.8	67.4	67.1	64.5	62.3	60.7	59.5	58.6	58.2	43.2	441.0
47,5°	64.9	65.9	65.1	65.4	62.7	59.6	58.0	56.9	55.9	55.1	54.7	45.5	486.5
50,0°	63.3	63.8	63.9	61.7	57.5	55.3	54.2	53.1	52.2	51.6	51.4	47.0	533.6
52,5°	63.3	61.9	60.9	57.4	53.5	51.9	50.9	50.0	49.2	48.7	48.7	47.3	580.8
55,0°	61.7	58.2	57.1	52.8	49.6	48.4	47.5	46.8	46.3	46.2	46.3	45.9	626.7
57,5°	55.9	54.2	53.1	48.0	45.6	44.6	44.2	43.6	43.3	43.2	43.3	43.9	670.6
60,0°	50.9	51.2	49.0	43.8	42.0	41.0	41.0	41.3	41.4	41.3	41.4	45.6	716.2
62,5°	47.0	48.1	45.1	40.5	38.9	37.8	37.7	37.0	36.3	36.2	36.6	44.9	761.1
65,0°	43.3	45.0	42.0	38.3	36.9	35.6	34.7	32.8	31.3	30.9	31.2	42.1	803.2
67,5°	39.5	41.3	38.8	36.8	35.8	34.1	30.8	27.7	26.5	26.2	26.5	42.5	845.7
70,0°	35.4	36.0	34.3	34.0	33.6	31.2	25.9	21.9	20.1	19.3	19.1	46.5	892.2
72,5°	29.4	29.7	29.0	29.6	29.0	25.6	19.2	15.4	13.8	12.9	12.7	48.7	940.9
75,0°	23.6	23.4	23.0	23.9	24.0	20.0	13.7	10.2	9.1	8.2	8.1	34.4	975.3
77,5°	17.7	16.7	16.1	17.0	17.6	14.4	8.7	6.1	4.9	4.0	3.8	16.7	992.0
80,0°	11.2	10.2	9.2	9.6	10.6	8.1	5.1	3.3	2.2	1.4	1.2	5.4	997.4
82,5°	5.5	5.0	4.3	4.0	4.7	3.8	2.6	1.8	1.2	0.8	0.7	1.7	999.2
85,0°	2.3	2.1	1.8	1.6	1.5	1.2	1.0	0.8	0.7	0.6	0.5	0.6	999.7
87,5°	1.3	1.2	1.1	1.0	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
Dimming levels table		environmental temperature: 25°C
siteco		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	23910	151.2	156.8	154.0
95	239	252	22740	142.3	147.4	144.9
90	224	249	21533	133.3	138.2	135.8
85	209	247	20301	124.5	128.9	126.7
80	195	244	19118	116.2	120.3	118.2
75	181	242	17904	107.9	111.7	109.8
70	168	239	16761	100.4	103.8	102.1
65	154	236	15510	92.2	95.5	93.8
60	141	232	14324	84.7	87.6	86.2
55	128	229	13121	77.3	79.9	78.6
50	116	225	11987	70.4	72.7	71.6
45	103	221	10743	63.0	65.1	64.0
40	91	216	9570	56.1	58.0	57.0
35	79	211	8384	49.3	50.9	50.1
30	67	205	7181	42.5	43.9	43.2
25	55	198	5957	35.7	36.8	36.2
20	44	190	4825	29.6	30.4	30.0
15	32	178	3569	22.8	23.4	23.1
12	25	169	2832	19.0	19.5	19.2

Dimming levels table

environmental temperature: 5°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	24690	153.0	158.6	155.8
95	239	252	23443	144.0	149.1	146.6
90	225	250	22248	135.6	140.4	138.0
85	210	247	20950	126.6	131.1	128.8
80	196	245	19710	118.3	122.5	120.4
75	183	242	18533	110.5	114.4	112.4
70	169	239	17252	102.3	105.8	104.0
65	156	236	16046	94.6	97.9	96.2
60	143	233	14818	87.0	90.1	88.6
55	130	229	13577	79.5	82.2	80.8
50	117	226	12314	72.0	74.4	73.2
45	105	222	11133	65.0	67.2	66.1
40	92	217	9833	57.5	59.4	58.4
35	80	212	8621	50.6	52.2	51.4
30	68	206	7392	43.7	45.1	44.4
25	56	199	6146	36.8	38.0	37.4
20	44	190	4889	30.0	30.9	30.4
15	33	179	3721	23.7	24.4	24.0
12	25	169	2866	19.3	19.8	19.6

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
---	--	-------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	24330	152.1	157.7	154.9
95	239	252	23119	143.1	148.2	145.6
90	224	249	21874	134.0	139.0	136.5
85	210	247	20690	125.8	130.3	128.0
80	196	245	19478	117.5	121.7	119.6
75	182	242	18237	109.2	113.0	111.1
70	169	239	17069	101.6	105.1	103.4
65	155	236	15793	93.4	96.7	95.1
60	142	233	14584	85.8	88.8	87.3
55	129	229	13362	78.4	81.1	79.8
50	117	226	12211	71.4	73.9	72.6
45	104	221	10947	64.0	66.2	65.1
40	92	217	9760	57.1	59.0	58.0
35	80	212	8560	50.2	51.8	51.0
30	68	206	7344	43.3	44.8	44.0
25	56	199	6109	36.5	37.7	37.1
20	44	190	4861	29.8	30.6	30.2
15	33	179	3701	23.5	24.2	23.8
12	25	169	2851	19.1	19.7	19.4

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7U47N08NB EAN: 4058352995662	LP number 59537_43
---	--	-------------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	23910.0	151.2
5.0	24690.0	153.0
15.0	24330.0	152.1