
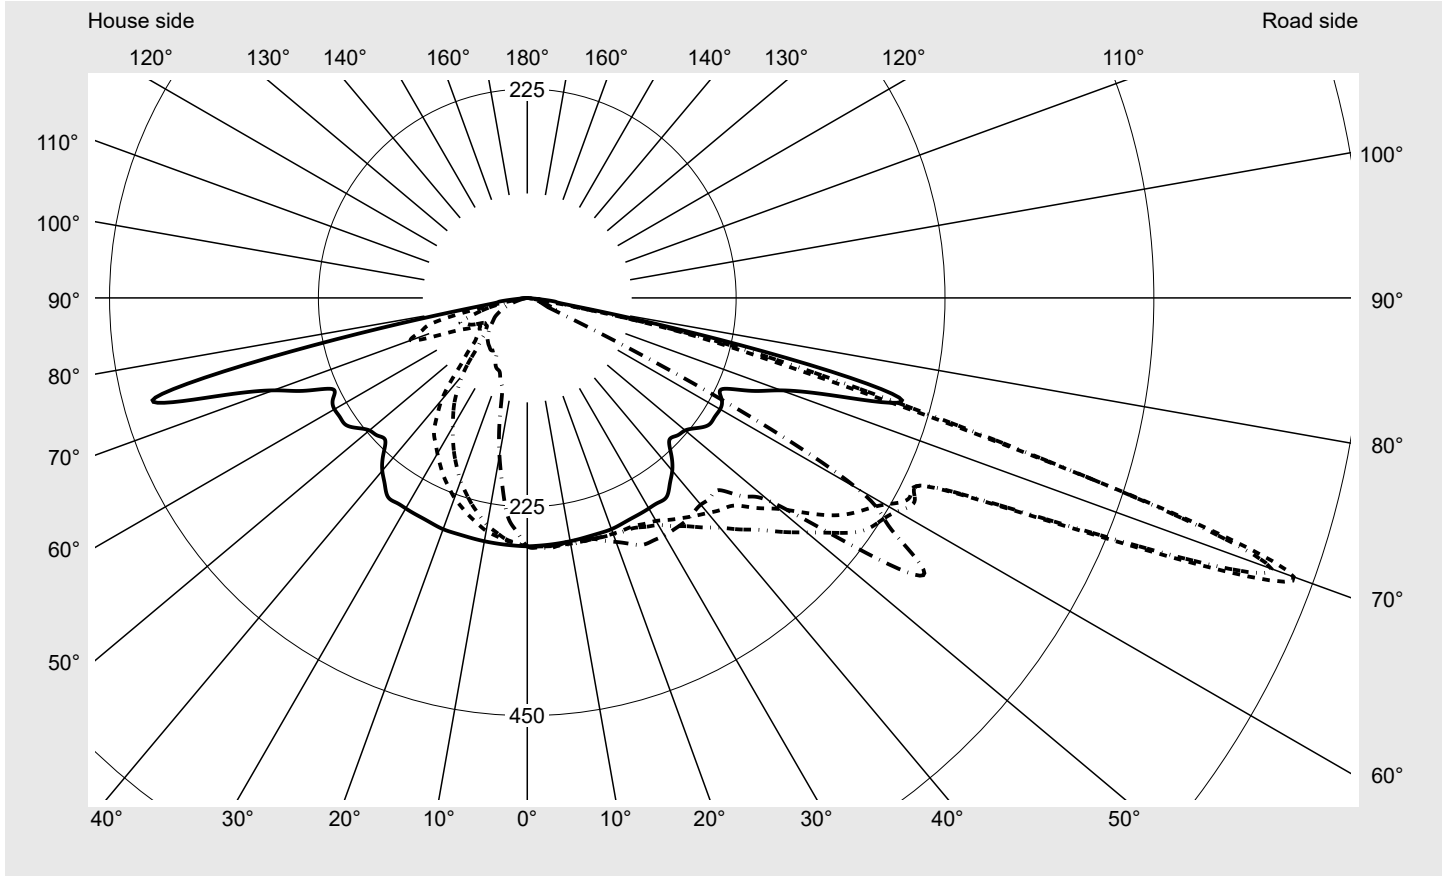


# Photometric test report

|  |   |   |
|--|---|---|
| <b>Family</b><br><b>Streetlight 21 midi easy LED</b> | <b>Order number: 5XE7U67N08MB</b><br><b>EAN: 4058352995709</b>  | <b>LP number</b><br><b>59536_121</b>  |
|  | <b>Version</b> post-top or side-entry mounting, NEMA 7 pin (DALI)<br><b>Optic</b> asymmetric, extremely wide distribution (P0.8a)<br><b>Cover</b> toughened safety glass<br><b>Lamps</b> LED 2700 K   CRI ≥ 70<br><b>Controlgear</b> ECG-DALI Plus<br><b>Rated values</b> Net luminous flux = 16380 lm<br>Power consumption = 134.3 W<br>Luminous efficacy = 122 lm/W | <b>serial documentation</b><br><b>18.01.2024</b>                                    |
|  |   |  |

**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 879 cd/klm**



**Luminaire output ratios**

|                |        |
|----------------|--------|
| Eta            | 100.0% |
| Eta 0° - 90°   | 100.0% |
| Eta 90° - 180° | 0.0%   |

**Luminous intensity class acc. to EN13201-2**

|           |       |
|-----------|-------|
| Class:    | G3    |
| Imax 70°  | 878.7 |
| Imax 80°  | 57.3  |
| Imax 90°  | 0.0   |
| Imax >90° | 0.0   |
| Imax >95° | 0.0   |

**Measurement conditions**

DIN EN 13032 and DIN 5032



## Photometric test report

|   |  |                                   |
|---|--|-----------------------------------|
| <b>Family</b><br>Streetlight 21 midi easy LED   | <b>Order number: 5XE7U67N08MB</b><br><b>EAN: 4058352995709</b> | <b>LP number</b><br>59536_121     |
| <b>Table of values for luminous intensities</b> |  | <b>Maximum luminous intensity</b> |
|   |  | <b>siteco</b>                     |

| C-planes | 0°<br>180°                   | 5°<br>175° | 10°<br>170° | 15°<br>165° | 20°<br>160° | 25°<br>155° | 30°<br>150° | 35°<br>145° | 40°<br>140° | 45°<br>135° | 50°<br>130° | 55°<br>125° | 60°<br>120° |
|----------|------------------------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| $\gamma$ | Luminous intensity in cd/klm |            |             |             |             |             |             |             |             |             |             |             |             |
| 0,0°     | 267.5                        | 267.5      | 267.5       | 267.5       | 267.5       | 267.5       | 267.5       | 267.5       | 267.5       | 267.5       | 267.5       | 267.5       | 267.5       |
| 2,5°     | 267.2                        | 267.2      | 267.4       | 267.7       | 268.0       | 268.2       | 268.3       | 268.4       | 268.7       | 268.6       | 268.6       | 268.7       | 268.7       |
| 5,0°     | 266.9                        | 266.9      | 267.2       | 267.8       | 268.6       | 268.9       | 269.1       | 269.3       | 269.8       | 269.6       | 269.6       | 269.8       | 269.9       |
| 7,5°     | 266.5                        | 266.7      | 267.4       | 268.3       | 269.0       | 269.1       | 269.0       | 269.1       | 269.2       | 269.0       | 268.6       | 268.3       | 268.2       |
| 10,0°    | 266.2                        | 266.6      | 267.5       | 268.8       | 269.4       | 269.4       | 269.0       | 268.9       | 268.7       | 268.3       | 267.5       | 266.8       | 266.5       |
| 12,5°    | 265.7                        | 266.8      | 267.7       | 268.9       | 269.3       | 269.2       | 268.7       | 268.4       | 268.0       | 267.7       | 267.2       | 266.8       | 266.7       |
| 15,0°    | 265.2                        | 267.0      | 267.9       | 269.1       | 269.2       | 269.1       | 268.3       | 267.9       | 267.3       | 267.0       | 266.9       | 266.8       | 267.0       |
| 17,5°    | 265.2                        | 267.9      | 268.8       | 269.7       | 270.1       | 270.0       | 269.8       | 269.8       | 269.9       | 270.4       | 270.8       | 271.1       | 271.6       |
| 20,0°    | 265.1                        | 268.9      | 269.6       | 270.3       | 271.0       | 270.8       | 271.2       | 271.7       | 272.4       | 273.8       | 274.7       | 275.4       | 276.3       |
| 22,5°    | 264.0                        | 268.4      | 269.8       | 270.7       | 272.2       | 273.3       | 274.8       | 276.9       | 278.7       | 280.6       | 282.2       | 283.8       | 285.0       |
| 25,0°    | 262.8                        | 268.0      | 269.9       | 271.2       | 273.4       | 275.7       | 278.4       | 282.1       | 285.0       | 287.4       | 289.7       | 292.2       | 293.7       |
| 27,5°    | 262.3                        | 269.0      | 271.7       | 274.3       | 277.9       | 281.8       | 286.1       | 291.1       | 295.3       | 299.0       | 301.4       | 302.9       | 302.7       |
| 30,0°    | 261.9                        | 269.9      | 273.5       | 277.4       | 282.5       | 287.8       | 293.9       | 300.0       | 305.5       | 310.6       | 313.1       | 313.5       | 311.7       |
| 32,5°    | 261.8                        | 271.7      | 277.3       | 283.5       | 291.4       | 299.5       | 307.7       | 315.0       | 321.0       | 325.6       | 326.4       | 323.2       | 318.0       |
| 35,0°    | 261.7                        | 273.6      | 281.1       | 289.6       | 300.3       | 311.1       | 321.4       | 329.9       | 336.4       | 340.6       | 339.8       | 332.9       | 324.3       |
| 37,5°    | 252.3                        | 268.4      | 281.4       | 296.0       | 311.7       | 326.6       | 338.9       | 348.1       | 353.7       | 354.6       | 350.3       | 339.3       | 327.6       |
| 40,0°    | 243.0                        | 263.2      | 281.8       | 302.4       | 323.1       | 342.1       | 356.4       | 366.4       | 370.9       | 368.7       | 360.7       | 345.6       | 330.9       |
| 42,5°    | 229.8                        | 256.4      | 281.5       | 309.4       | 338.2       | 363.9       | 378.3       | 385.7       | 385.6       | 377.9       | 365.2       | 348.0       | 332.0       |
| 45,0°    | 216.5                        | 249.6      | 281.2       | 316.3       | 353.3       | 385.7       | 400.3       | 405.0       | 400.3       | 387.0       | 369.7       | 350.4       | 333.1       |
| 47,5°    | 219.3                        | 258.6      | 295.9       | 335.0       | 373.2       | 403.4       | 416.6       | 415.9       | 404.4       | 385.7       | 366.0       | 350.2       | 338.2       |
| 50,0°    | 222.0                        | 267.6      | 310.6       | 353.7       | 393.0       | 421.0       | 433.0       | 426.9       | 408.5       | 384.3       | 362.2       | 350.0       | 343.3       |
| 52,5°    | 230.3                        | 281.2      | 331.6       | 380.9       | 415.7       | 432.1       | 429.8       | 415.1       | 391.8       | 372.1       | 363.5       | 370.8       | 388.4       |
| 55,0°    | 238.5                        | 294.7      | 352.7       | 408.1       | 438.3       | 443.1       | 426.6       | 403.4       | 375.0       | 359.8       | 364.8       | 391.6       | 433.4       |
| 57,5°    | 239.2                        | 300.2      | 368.4       | 426.7       | 449.2       | 436.9       | 401.3       | 371.3       | 353.4       | 354.2       | 384.0       | 423.0       | 459.6       |
| 60,0°    | 239.9                        | 305.7      | 384.0       | 445.2       | 460.1       | 430.6       | 376.1       | 339.2       | 331.9       | 348.6       | 403.2       | 454.3       | 485.7       |
| 62,5°    | 236.0                        | 306.5      | 398.6       | 464.7       | 470.8       | 420.8       | 351.7       | 313.7       | 319.3       | 347.2       | 376.6       | 376.0       | 347.7       |
| 65,0°    | 232.2                        | 307.3      | 413.1       | 484.1       | 481.4       | 410.9       | 327.3       | 288.2       | 306.7       | 345.7       | 350.0       | 297.8       | 209.7       |
| 67,5°    | 261.7                        | 400.0      | 570.4       | 681.4       | 667.3       | 523.6       | 348.4       | 299.5       | 324.9       | 331.4       | 253.7       | 172.7       | 120.4       |
| 70,0°    | 291.2                        | 492.6      | 727.8       | 878.7       | 853.1       | 636.3       | 369.5       | 310.8       | 343.1       | 317.0       | 157.5       | 47.7        | 31.0        |
| 72,5°    | 353.0                        | 430.5      | 526.3       | 594.6       | 600.5       | 549.8       | 505.8       | 527.8       | 350.6       | 186.2       | 90.1        | 34.6        | 25.1        |
| 75,0°    | 414.8                        | 368.5      | 324.8       | 310.5       | 347.9       | 463.4       | 642.1       | 744.8       | 358.1       | 55.4        | 22.7        | 21.6        | 19.3        |
| 77,5°    | 236.0                        | 205.6      | 178.8       | 168.2       | 183.7       | 239.0       | 334.0       | 387.5       | 184.9       | 33.3        | 17.6        | 16.7        | 14.7        |
| 80,0°    | 57.3                         | 42.7       | 32.7        | 25.9        | 19.4        | 14.6        | 25.9        | 30.2        | 11.7        | 11.3        | 12.5        | 11.9        | 10.0        |
| 82,5°    | 30.0                         | 22.6       | 17.5        | 14.0        | 10.7        | 8.3         | 13.9        | 16.1        | 6.8         | 6.6         | 7.4         | 7.1         | 6.4         |
| 85,0°    | 2.7                          | 2.5        | 2.3         | 2.2         | 2.1         | 2.0         | 2.0         | 2.0         | 2.0         | 2.0         | 2.3         | 2.4         | 2.7         |
| 87,5°    | 1.4                          | 1.3        | 1.1         | 1.1         | 1.0         | 1.0         | 1.0         | 1.0         | 1.0         | 1.0         | 1.1         | 1.2         | 1.4         |
| 90,0°    | 0.0                          | 0.0        | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         |

## Photometric test report

|  |  |                                      |
|--|--|--------------------------------------|
| <b>Family</b><br><b>Streetlight 21 midi easy LED</b> | <b>Order number: 5XE7U67N08MB</b><br><b>EAN: 4058352995709</b> | <b>LP number</b><br><b>59536_121</b> |
| <b>Table of values for luminous intensities</b>      |  | <b>Maximum luminous intensity</b>    |
|  |  | <b>siteco</b>                        |

| C-planes | 65°<br>115°                  | 70°<br>110° | 75°<br>105° | 80°<br>100° | 85°<br>95° | 90°   | 185°<br>355° | 190°<br>350° | 195°<br>345° | 200°<br>340° | 205°<br>335° | 210°<br>330° | 215°<br>325° |
|----------|------------------------------|-------------|-------------|-------------|------------|-------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| γ        | Luminous intensity in cd/klm |             |             |             |            |       |              |              |              |              |              |              |              |
| 0,0°     | 267.5                        | 267.5       | 267.5       | 267.5       | 267.5      | 267.5 | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        |
| 2,5°     | 268.8                        | 268.7       | 268.8       | 268.9       | 268.9      | 269.0 | 266.5        | 265.7        | 264.9        | 264.3        | 263.2        | 262.1        | 260.9        |
| 5,0°     | 270.0                        | 269.8       | 270.0       | 270.2       | 270.3      | 270.5 | 265.5        | 264.0        | 262.3        | 261.0        | 259.0        | 256.8        | 254.3        |
| 7,5°     | 268.1                        | 268.0       | 267.8       | 268.0       | 268.1      | 268.3 | 264.6        | 261.7        | 258.5        | 254.8        | 250.1        | 245.2        | 240.0        |
| 10,0°    | 266.2                        | 266.2       | 265.6       | 265.7       | 265.9      | 266.2 | 263.7        | 259.4        | 254.8        | 248.5        | 241.2        | 233.7        | 225.8        |
| 12,5°    | 266.6                        | 266.7       | 266.6       | 266.8       | 267.1      | 267.4 | 262.2        | 256.2        | 248.7        | 239.4        | 229.0        | 218.0        | 206.6        |
| 15,0°    | 267.0                        | 267.3       | 267.5       | 267.9       | 268.3      | 268.7 | 260.7        | 253.0        | 242.7        | 230.3        | 216.7        | 202.2        | 187.3        |
| 17,5°    | 271.9                        | 272.4       | 272.7       | 273.3       | 273.7      | 274.2 | 260.0        | 249.6        | 236.0        | 220.1        | 202.7        | 184.7        | 166.5        |
| 20,0°    | 276.9                        | 277.5       | 277.9       | 278.7       | 279.1      | 279.7 | 259.3        | 246.2        | 229.2        | 209.9        | 188.8        | 167.2        | 145.7        |
| 22,5°    | 285.7                        | 286.0       | 285.3       | 285.9       | 286.0      | 286.6 | 256.1        | 240.7        | 220.9        | 197.9        | 173.1        | 148.9        | 124.7        |
| 25,0°    | 294.5                        | 294.4       | 292.7       | 293.2       | 293.0      | 293.5 | 253.0        | 235.1        | 212.5        | 186.0        | 157.4        | 130.7        | 103.7        |
| 27,5°    | 301.7                        | 299.6       | 296.6       | 295.1       | 294.3      | 294.5 | 249.8        | 229.0        | 203.1        | 173.2        | 142.1        | 112.9        | 90.5         |
| 30,0°    | 308.9                        | 304.7       | 300.5       | 297.1       | 295.6      | 295.6 | 246.5        | 222.9        | 193.6        | 160.4        | 126.8        | 95.2         | 77.3         |
| 32,5°    | 313.0                        | 307.3       | 302.0       | 297.5       | 295.4      | 295.3 | 243.8        | 216.9        | 184.3        | 148.5        | 113.2        | 85.2         | 75.5         |
| 35,0°    | 317.0                        | 310.0       | 303.6       | 298.0       | 295.1      | 294.9 | 241.1        | 211.0        | 175.1        | 136.5        | 99.5         | 75.1         | 73.7         |
| 37,5°    | 317.8                        | 309.7       | 303.3       | 296.8       | 293.1      | 292.9 | 227.5        | 194.9        | 159.3        | 122.5        | 89.6         | 70.6         | 71.2         |
| 40,0°    | 318.5                        | 309.4       | 303.1       | 295.7       | 291.1      | 290.8 | 213.8        | 178.8        | 143.5        | 108.6        | 79.7         | 66.1         | 68.6         |
| 42,5°    | 318.9                        | 309.7       | 303.7       | 297.1       | 292.4      | 291.8 | 194.6        | 156.5        | 121.9        | 92.6         | 71.9         | 63.8         | 66.0         |
| 45,0°    | 319.2                        | 310.1       | 304.3       | 298.5       | 293.8      | 292.9 | 175.4        | 134.2        | 100.3        | 76.6         | 64.1         | 61.5         | 63.3         |
| 47,5°    | 329.8                        | 326.0       | 323.9       | 321.0       | 317.3      | 316.6 | 170.5        | 122.9        | 87.3         | 67.9         | 61.3         | 60.6         | 62.1         |
| 50,0°    | 340.3                        | 341.9       | 343.4       | 343.5       | 340.8      | 340.4 | 165.5        | 111.6        | 74.4         | 59.3         | 58.4         | 59.8         | 60.9         |
| 52,5°    | 405.0                        | 419.9       | 430.4       | 434.7       | 431.6      | 430.6 | 167.0        | 108.2        | 68.4         | 56.2         | 56.5         | 57.5         | 57.6         |
| 55,0°    | 469.7                        | 498.0       | 517.3       | 525.9       | 522.3      | 520.8 | 168.4        | 104.8        | 62.4         | 53.0         | 54.6         | 55.3         | 54.3         |
| 57,5°    | 478.3                        | 480.2       | 474.1       | 472.9       | 468.6      | 465.7 | 167.5        | 102.3        | 61.0         | 53.3         | 50.4         | 50.0         | 50.6         |
| 60,0°    | 486.8                        | 462.4       | 430.8       | 419.9       | 414.9      | 410.5 | 166.7        | 99.7         | 59.6         | 53.6         | 46.2         | 44.6         | 46.9         |
| 62,5°    | 304.6                        | 260.5       | 238.2       | 232.6       | 228.3      | 225.8 | 164.6        | 102.3        | 71.0         | 60.8         | 46.8         | 42.1         | 46.4         |
| 65,0°    | 122.3                        | 58.5        | 45.5        | 45.3        | 41.7       | 41.1  | 162.5        | 104.9        | 82.5         | 68.0         | 47.5         | 39.6         | 45.8         |
| 67,5°    | 75.0                         | 42.9        | 36.1        | 36.0        | 33.8       | 33.5  | 171.9        | 140.1        | 107.9        | 72.2         | 44.8         | 36.5         | 43.4         |
| 70,0°    | 27.6                         | 27.3        | 26.7        | 26.8        | 26.0       | 25.9  | 181.3        | 175.3        | 133.4        | 76.4         | 42.1         | 33.3         | 41.1         |
| 72,5°    | 22.7                         | 22.0        | 21.3        | 21.1        | 20.5       | 20.3  | 265.1        | 189.7        | 120.0        | 62.2         | 33.7         | 27.5         | 35.0         |
| 75,0°    | 17.7                         | 16.6        | 15.9        | 15.3        | 15.0       | 14.8  | 348.9        | 204.0        | 106.7        | 47.9         | 25.3         | 21.8         | 29.0         |
| 77,5°    | 13.1                         | 12.5        | 11.5        | 11.1        | 10.8       | 10.6  | 193.6        | 113.1        | 59.4         | 29.8         | 17.4         | 15.8         | 20.3         |
| 80,0°    | 8.4                          | 8.3         | 7.2         | 6.9         | 6.6        | 6.5   | 38.3         | 22.1         | 12.2         | 11.8         | 9.4          | 9.8          | 11.6         |
| 82,5°    | 5.4                          | 5.2         | 4.5         | 4.3         | 4.1        | 4.0   | 20.5         | 12.5         | 7.6          | 7.4          | 6.0          | 6.3          | 7.0          |
| 85,0°    | 2.3                          | 2.1         | 1.8         | 1.7         | 1.6        | 1.5   | 2.8          | 2.8          | 2.9          | 2.9          | 2.7          | 2.7          | 2.5          |
| 87,5°    | 1.1                          | 1.0         | 0.9         | 0.8         | 0.8        | 0.7   | 1.4          | 1.4          | 1.5          | 1.5          | 1.4          | 1.4          | 1.3          |
| 90,0°    | 0.0                          | 0.0         | 0.0         | 0.0         | 0.0        | 0.0   | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |

## Photometric test report

|   |  |                                   |
|---|--|-----------------------------------|
| <b>Family</b><br>Streetlight 21 midi easy LED   | <b>Order number: 5XE7U67N08MB</b><br><b>EAN: 4058352995709</b> | <b>LP number</b><br>59536_121     |
| <b>Table of values for luminous intensities</b> |  | <b>Maximum luminous intensity</b> |
|   |  | <b>siteco</b>                     |

| C-planes | 220°<br>320°                 | 225°<br>315° | 230°<br>310° | 235°<br>305° | 240°<br>300° | 245°<br>295° | 250°<br>290° | 255°<br>285° | 260°<br>280° | 265°<br>275° | 270°  | Phi-zone                | Total<br>Phi-zone |
|----------|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------|-------------------------|-------------------|
| $\gamma$ | Luminous intensity in cd/klm |              |              |              |              |              |              |              |              |              |       | Luminous flux in lm/klm |                   |
| 0,0°     | 267.5                        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5        | 267.5 | 0.4                     | 0.4               |
| 2,5°     | 259.6                        | 258.4        | 257.3        | 256.2        | 255.1        | 254.3        | 253.6        | 253.0        | 252.6        | 252.4        | 252.3 | 3.2                     | 3.6               |
| 5,0°     | 251.7                        | 249.4        | 247.1        | 244.9        | 242.7        | 241.1        | 239.8        | 238.5        | 237.7        | 237.3        | 237.2 | 6.2                     | 9.8               |
| 7,5°     | 234.8                        | 230.1        | 225.2        | 220.5        | 216.3        | 213.0        | 210.1        | 207.9        | 206.2        | 205.4        | 204.8 | 9.0                     | 18.7              |
| 10,0°    | 217.9                        | 210.8        | 203.4        | 196.1        | 189.9        | 184.8        | 180.4        | 177.3        | 174.8        | 173.4        | 172.5 | 11.5                    | 30.2              |
| 12,5°    | 195.6                        | 185.0        | 175.2        | 166.1        | 158.0        | 151.4        | 146.3        | 142.8        | 140.4        | 139.1        | 138.4 | 13.6                    | 43.8              |
| 15,0°    | 173.3                        | 159.2        | 147.1        | 136.1        | 126.1        | 118.1        | 112.2        | 108.3        | 106.0        | 104.7        | 104.3 | 15.5                    | 59.4              |
| 17,5°    | 149.3                        | 133.3        | 121.0        | 111.9        | 105.2        | 100.8        | 98.1         | 96.7         | 95.8         | 95.3         | 95.2  | 17.6                    | 76.9              |
| 20,0°    | 125.4                        | 107.5        | 94.9         | 87.6         | 84.4         | 83.5         | 84.0         | 85.2         | 85.7         | 85.9         | 86.1  | 19.5                    | 96.4              |
| 22,5°    | 105.4                        | 93.2         | 87.8         | 86.3         | 86.0         | 85.8         | 85.4         | 85.1         | 84.3         | 83.6         | 83.3  | 21.7                    | 118.1             |
| 25,0°    | 85.5                         | 78.9         | 80.6         | 84.9         | 87.6         | 88.0         | 86.8         | 84.9         | 82.9         | 81.2         | 80.5  | 23.8                    | 141.9             |
| 27,5°    | 81.2                         | 81.9         | 85.3         | 88.0         | 88.0         | 85.8         | 82.5         | 79.3         | 76.2         | 74.0         | 73.1  | 26.1                    | 168.0             |
| 30,0°    | 77.0                         | 84.8         | 90.0         | 91.2         | 88.3         | 83.6         | 78.3         | 73.6         | 69.6         | 66.7         | 65.7  | 28.2                    | 196.2             |
| 32,5°    | 79.1                         | 85.7         | 88.8         | 87.8         | 84.1         | 79.6         | 75.2         | 71.9         | 69.4         | 67.7         | 67.1  | 30.6                    | 226.8             |
| 35,0°    | 81.2                         | 86.7         | 87.6         | 84.5         | 79.9         | 75.6         | 72.2         | 70.2         | 69.3         | 68.6         | 68.4  | 32.9                    | 259.7             |
| 37,5°    | 76.3                         | 79.2         | 78.9         | 77.1         | 76.1         | 74.0         | 71.1         | 69.2         | 67.9         | 67.1         | 66.7  | 34.9                    | 294.6             |
| 40,0°    | 71.3                         | 71.6         | 70.3         | 69.7         | 72.4         | 72.5         | 70.0         | 68.2         | 66.6         | 65.5         | 65.1  | 36.8                    | 331.3             |
| 42,5°    | 67.4                         | 67.5         | 68.8         | 69.1         | 68.9         | 68.5         | 66.8         | 65.5         | 64.3         | 63.3         | 62.9  | 38.5                    | 369.8             |
| 45,0°    | 63.5                         | 63.4         | 67.3         | 68.6         | 65.4         | 64.6         | 63.6         | 62.8         | 62.0         | 61.1         | 60.7  | 40.2                    | 410.1             |
| 47,5°    | 62.2                         | 64.8         | 65.8         | 64.2         | 61.6         | 61.0         | 60.1         | 59.3         | 58.4         | 57.5         | 57.2  | 42.8                    | 452.8             |
| 50,0°    | 60.9                         | 66.1         | 64.2         | 59.8         | 57.9         | 57.4         | 56.6         | 55.8         | 54.8         | 53.9         | 53.6  | 45.3                    | 498.1             |
| 52,5°    | 59.8                         | 63.6         | 59.5         | 55.6         | 53.9         | 53.3         | 52.6         | 51.7         | 50.6         | 49.9         | 49.7  | 50.1                    | 548.1             |
| 55,0°    | 58.6                         | 61.0         | 54.8         | 51.4         | 50.0         | 49.2         | 48.5         | 47.6         | 46.5         | 45.9         | 45.9  | 55.0                    | 603.1             |
| 57,5°    | 57.5                         | 56.2         | 50.1         | 47.2         | 46.0         | 45.1         | 44.4         | 43.8         | 43.2         | 42.8         | 42.8  | 55.3                    | 658.4             |
| 60,0°    | 56.4                         | 51.4         | 45.4         | 43.1         | 42.0         | 41.0         | 40.4         | 40.0         | 39.8         | 39.7         | 39.6  | 55.4                    | 713.8             |
| 62,5°    | 54.0                         | 47.8         | 42.0         | 39.7         | 38.3         | 37.1         | 36.5         | 36.0         | 35.5         | 35.1         | 35.0  | 47.7                    | 761.5             |
| 65,0°    | 51.6                         | 44.2         | 38.6         | 36.3         | 34.6         | 33.2         | 32.5         | 31.9         | 31.2         | 30.5         | 30.5  | 39.5                    | 800.9             |
| 67,5°    | 48.3                         | 41.4         | 36.3         | 33.4         | 30.6         | 28.5         | 27.4         | 26.5         | 25.7         | 25.0         | 24.9  | 43.3                    | 844.2             |
| 70,0°    | 45.1                         | 38.6         | 34.0         | 30.6         | 26.6         | 23.9         | 22.2         | 21.1         | 20.1         | 19.6         | 19.4  | 47.1                    | 891.3             |
| 72,5°    | 38.7                         | 34.3         | 30.3         | 25.9         | 21.5         | 18.5         | 16.7         | 15.5         | 14.5         | 14.0         | 13.8  | 42.6                    | 933.9             |
| 75,0°    | 32.4                         | 30.0         | 26.6         | 21.3         | 16.4         | 13.1         | 11.3         | 10.0         | 9.0          | 8.3          | 8.1   | 37.9                    | 971.7             |
| 77,5°    | 22.7                         | 22.3         | 20.0         | 15.8         | 11.7         | 9.2          | 7.7          | 6.6          | 5.6          | 4.9          | 4.7   | 21.1                    | 992.8             |
| 80,0°    | 13.0                         | 14.5         | 13.5         | 10.3         | 7.0          | 5.2          | 4.2          | 3.1          | 2.2          | 1.5          | 1.3   | 4.0                     | 996.9             |
| 82,5°    | 7.7                          | 8.3          | 7.6          | 6.0          | 4.2          | 3.2          | 2.6          | 2.0          | 1.5          | 1.0          | 0.9   | 2.3                     | 999.2             |
| 85,0°    | 2.3                          | 2.1          | 1.8          | 1.7          | 1.5          | 1.3          | 1.0          | 0.8          | 0.7          | 0.6          | 0.6   | 0.6                     | 999.7             |
| 87,5°    | 1.1                          | 1.0          | 0.9          | 0.8          | 0.7          | 0.6          | 0.5          | 0.4          | 0.4          | 0.3          | 0.3   | 0.3                     | 1000.0            |
| 90,0°    | 0.0                          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0   | 0.0                     | 1000.0            |

## Photometric test report

|   |  |                               |
|---|--|-------------------------------|
| <b>Family</b><br>Streetlight 21 midi easy LED | <b>Order number: 5XE7U67N08MB</b><br><b>EAN: 4058352995709</b> | <b>LP number</b><br>59536_121 |
|---|--|-------------------------------|

|                             |                                 |               |
|-----------------------------|---------------------------------|---------------|
| <b>Dimming levels table</b> | environmental temperature: 25°C | <b>siteco</b> |
|-----------------------------|---------------------------------|---------------|

| Luminous flux % | Dimming level linear | Dimming level logarithmic | Luminous flux [lm] | Power consumption [W] start of lifetime | Power consumption [W] end of lifetime | Power consumption [W] average |
|-----------------|----------------------|---------------------------|--------------------|---|---------------------------------------|-------------------------------|
| 100             | 254                  | 254                       | 16380              | 134.3                                   | 141.0                                 | 137.6                         |
| 95              | 237                  | 251                       | 15539              | 125.3                                   | 131.4                                 | 128.4                         |
| 90              | 221                  | 249                       | 14717              | 116.9                                   | 122.5                                 | 119.7                         |
| 85              | 206                  | 246                       | 13919              | 108.9                                   | 114.2                                 | 111.6                         |
| 80              | 191                  | 244                       | 13088              | 101.1                                   | 105.9                                 | 103.5                         |
| 75              | 177                  | 241                       | 12290              | 93.8                                    | 98.3                                  | 96.0                          |
| 70              | 163                  | 238                       | 11473              | 86.7                                    | 90.7                                  | 88.7                          |
| 65              | 149                  | 234                       | 10625              | 79.5                                    | 83.2                                  | 81.4                          |
| 60              | 136                  | 231                       | 9817               | 72.9                                    | 76.2                                  | 74.6                          |
| 55              | 123                  | 227                       | 8987               | 66.3                                    | 69.2                                  | 67.8                          |
| 50              | 111                  | 224                       | 8202               | 60.1                                    | 62.8                                  | 61.4                          |
| 45              | 99                   | 219                       | 7399               | 54.2                                    | 56.5                                  | 55.4                          |
| 40              | 87                   | 215                       | 6573               | 48.2                                    | 50.3                                  | 49.2                          |
| 35              | 75                   | 209                       | 5733               | 42.1                                    | 43.8                                  | 43.0                          |
| 30              | 64                   | 204                       | 4946               | 36.6                                    | 38.1                                  | 37.4                          |
| 25              | 52                   | 196                       | 4072               | 30.6                                    | 31.9                                  | 31.2                          |
| 20              | 41                   | 187                       | 3252               | 25.2                                    | 26.2                                  | 25.7                          |
| 15              | 31                   | 177                       | 2494               | 20.3                                    | 21.1                                  | 20.7                          |
| 13              | 27                   | 172                       | 2188               | 18.3                                    | 19.0                                  | 18.6                          |

|                             |                                |
|-----------------------------|--------------------------------|
| <b>Dimming levels table</b> | environmental temperature: 5°C |
|-----------------------------|--------------------------------|

| Luminous flux % | Dimming level linear | Dimming level logarithmic | Luminous flux [lm] | Power consumption [W] start of lifetime | Power consumption [W] end of lifetime | Power consumption [W] average |
|-----------------|----------------------|---------------------------|--------------------|---|---------------------------------------|-------------------------------|
| 100             | 254                  | 254                       | 16940              | 135.8                                   | 142.5                                 | 139.2                         |
| 95              | 238                  | 252                       | 16089              | 127.2                                   | 133.4                                 | 130.3                         |
| 90              | 223                  | 249                       | 15268              | 119.4                                   | 125.0                                 | 122.2                         |
| 85              | 208                  | 247                       | 14423              | 111.3                                   | 116.6                                 | 114.0                         |
| 80              | 193                  | 244                       | 13550              | 103.4                                   | 108.3                                 | 105.8                         |
| 75              | 179                  | 241                       | 12717              | 96.1                                    | 100.5                                 | 98.3                          |
| 70              | 165                  | 238                       | 11864              | 88.8                                    | 92.9                                  | 90.8                          |
| 65              | 151                  | 235                       | 10986              | 81.5                                    | 85.3                                  | 83.4                          |
| 60              | 138                  | 232                       | 10149              | 74.9                                    | 78.2                                  | 76.6                          |
| 55              | 125                  | 228                       | 9295               | 68.1                                    | 71.3                                  | 69.7                          |
| 50              | 113                  | 224                       | 8488               | 62.0                                    | 64.7                                  | 63.4                          |
| 45              | 100                  | 220                       | 7597               | 55.4                                    | 57.8                                  | 56.6                          |
| 40              | 88                   | 215                       | 6751               | 49.3                                    | 51.5                                  | 50.4                          |
| 35              | 77                   | 210                       | 5965               | 43.7                                    | 45.6                                  | 44.7                          |
| 30              | 65                   | 204                       | 5092               | 37.6                                    | 39.2                                  | 38.4                          |
| 25              | 53                   | 197                       | 4203               | 31.6                                    | 32.8                                  | 32.2                          |
| 20              | 42                   | 188                       | 3371               | 26.1                                    | 27.2                                  | 26.6                          |
| 15              | 31                   | 177                       | 2525               | 20.7                                    | 21.4                                  | 21.0                          |
| 13              | 27                   | 172                       | 2214               | 18.7                                    | 19.3                                  | 19.0                          |

## Photometric test report

|   |  |                               |
|---|--|-------------------------------|
| <b>Family</b><br>Streetlight 21 midi easy LED | <b>Order number: 5XE7U67N08MB</b><br><b>EAN: 4058352995709</b> | <b>LP number</b><br>59536_121 |
|---|--|-------------------------------|

|                             |                                 |               |
|-----------------------------|---------------------------------|---------------|
| <b>Dimming levels table</b> | environmental temperature: 15°C | <b>siteco</b> |
|-----------------------------|---------------------------------|---------------|

| Luminous flux % | Dimming level linear | Dimming level logarithmic | Luminous flux [lm] | Power consumption [W] start of lifetime | Power consumption [W] end of lifetime | Power consumption [W] average |
|-----------------|----------------------|---------------------------|--------------------|---|---------------------------------------|-------------------------------|
| 100             | 254                  | 254                       | 16680              | 135.1                                   | 141.7                                 | 138.4                         |
| 95              | 238                  | 252                       | 15858              | 126.5                                   | 132.6                                 | 129.6                         |
| 90              | 222                  | 249                       | 15009              | 118.1                                   | 123.8                                 | 121.0                         |
| 85              | 207                  | 247                       | 14186              | 110.2                                   | 115.3                                 | 112.8                         |
| 80              | 192                  | 244                       | 13332              | 102.2                                   | 107.1                                 | 104.6                         |
| 75              | 178                  | 241                       | 12515              | 94.9                                    | 99.4                                  | 97.2                          |
| 70              | 164                  | 238                       | 11679              | 87.7                                    | 91.8                                  | 89.8                          |
| 65              | 150                  | 235                       | 10815              | 80.5                                    | 84.2                                  | 82.4                          |
| 60              | 137                  | 231                       | 9992               | 73.9                                    | 77.2                                  | 75.6                          |
| 55              | 124                  | 228                       | 9149               | 67.1                                    | 70.2                                  | 68.6                          |
| 50              | 112                  | 224                       | 8352               | 61.0                                    | 63.8                                  | 62.4                          |
| 45              | 100                  | 220                       | 7538               | 55.0                                    | 57.4                                  | 56.2                          |
| 40              | 88                   | 215                       | 6702               | 49.0                                    | 51.1                                  | 50.0                          |
| 35              | 76                   | 210                       | 5854               | 42.9                                    | 44.7                                  | 43.8                          |
| 30              | 64                   | 204                       | 4987               | 36.8                                    | 38.4                                  | 37.6                          |
| 25              | 53                   | 197                       | 4178               | 31.4                                    | 32.6                                  | 32.0                          |
| 20              | 42                   | 188                       | 3353               | 25.9                                    | 26.9                                  | 26.4                          |
| 15              | 31                   | 177                       | 2511               | 20.5                                    | 21.2                                  | 20.8                          |
| 13              | 27                   | 172                       | 2203               | 18.5                                    | 19.2                                  | 18.8                          |

**Photometric test report**

|   |  |                                      |
|---|--|--------------------------------------|
| <b>Family</b><br>Streetlight 21 midi easy LED | <b>Order number: 5XE7U67N08MB</b><br><b>EAN: 4058352995709</b> | <b>LP number</b><br><b>59536_121</b> |
|---|--|--------------------------------------|

|                            |               |
|----------------------------|---------------|
| <b>Luminousfluxs table</b> | <b>sITeco</b> |
|----------------------------|---------------|

| Temperature<br>°C | Luminous flux<br>lm | Power consumption<br>W |
|-------------------|---------------------|------------------------|
| 25.0              | 16380.0             | 134.3                  |
| 5.0               | 16940.0             | 135.8                  |
| 15.0              | 16680.0             | 135.1                  |