
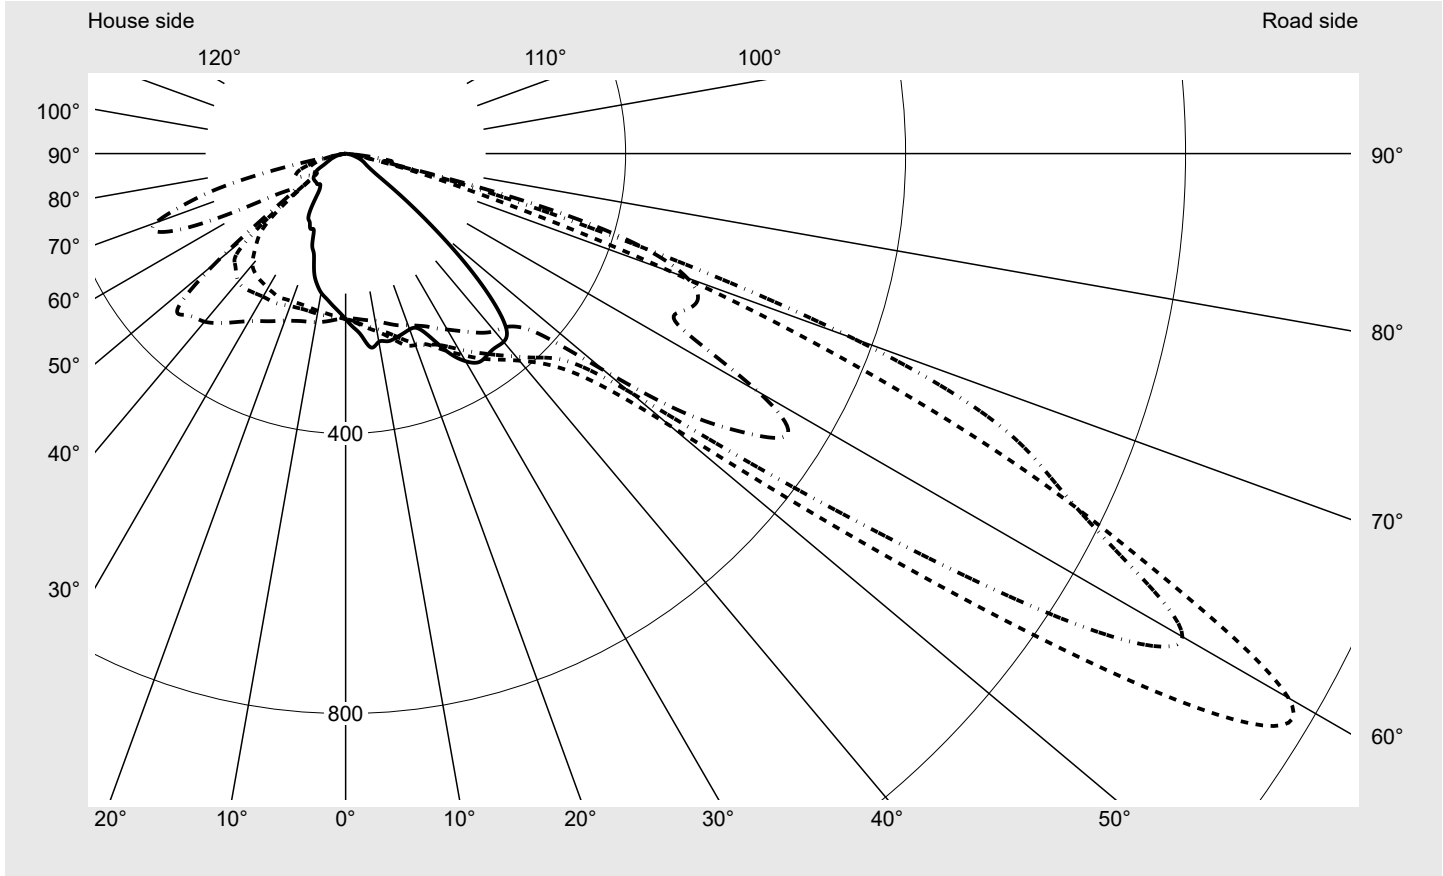


# Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> <b>59560_60</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up	<b>serial documentation</b> <b>07.02.2024</b>
	<b>Optic</b> pedestrian crossing, asymmetric right distribution (PC-R)	
	<b>Cover</b> toughened safety glass	
	<b>Lamps</b> LED 4000 K   CRI ≥ 70	
	<b>Controlgear</b> EVG-Smart Interface	
<b>Rated values</b> Net luminous flux = 19200 lm Power consumption = 147.0 W Luminous efficacy = 130.6 lm/W		

**Luminous intensity in cd/klm** C180-0 C250-70 C255-75 C270-90 **Imax: 1555 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	818.0
Imax 80°	67.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> 59560_60
--	--	------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

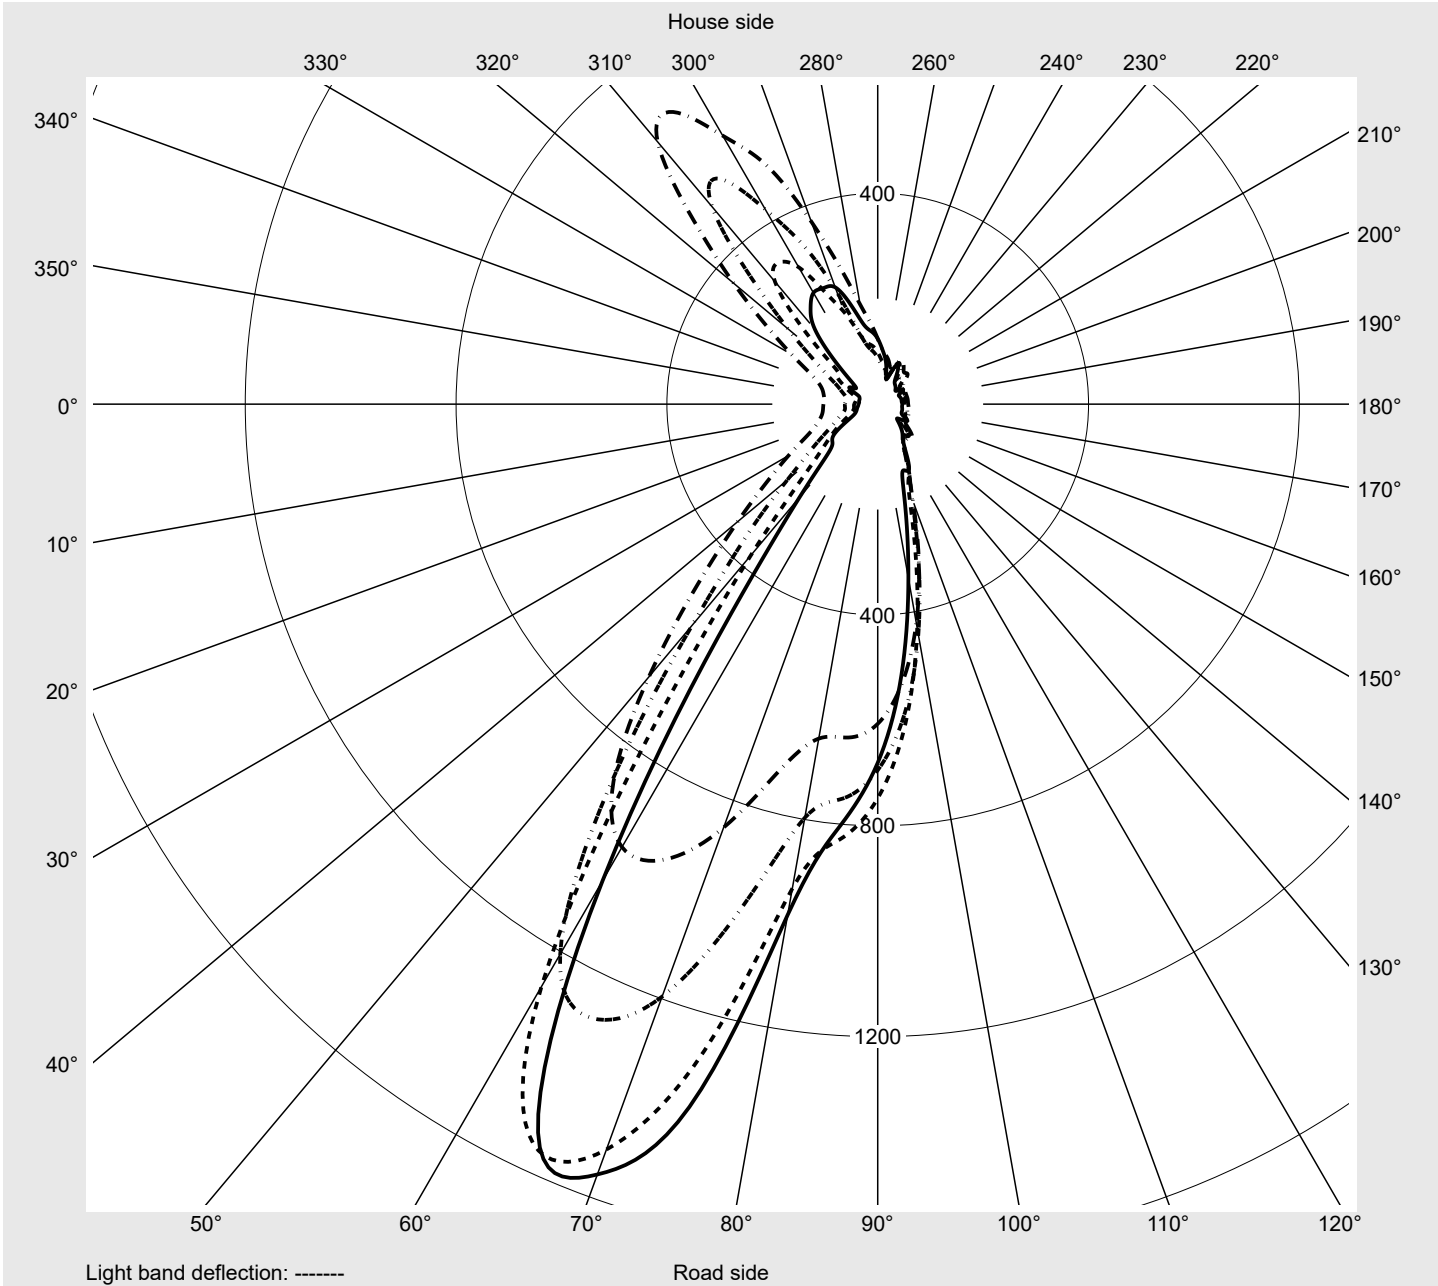

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> <b>59560_60</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	248.3	248.1	247.7	246.7	246.3	245.7	245.1	244.5	243.9	243.3	242.7	242.1	241.5	240.9
5,0°	261.3	260.9	259.9	258.7	257.7	256.5	255.5	254.1	252.9	251.7	250.5	249.1	248.1	246.9
7,5°	279.5	278.9	277.5	275.9	274.7	272.9	270.9	268.5	266.1	263.5	260.7	258.7	256.5	254.1
10,0°	273.1	272.3	271.1	270.7	270.9	271.9	273.9	276.5	278.1	277.3	273.9	269.7	265.7	261.5
12,5°	274.7	274.1	272.9	272.5	272.7	272.5	272.5	272.3	271.9	272.7	276.7	280.1	277.3	271.7
15,0°	273.1	272.5	271.7	271.9	272.9	273.5	274.7	275.5	276.3	276.5	275.5	276.3	281.9	282.7
17,5°	270.1	269.7	269.1	269.7	271.3	272.7	274.9	277.1	279.5	281.9	283.3	283.5	281.9	284.9
20,0°	267.3	266.9	266.5	267.5	269.3	271.7	274.5	277.9	281.9	286.3	289.9	292.3	292.1	288.5
22,5°	270.3	269.9	268.5	268.3	269.1	270.5	273.7	277.9	283.1	289.1	295.1	300.1	302.1	299.7
25,0°	291.5	289.9	286.1	281.9	277.7	275.5	275.7	278.9	283.9	290.9	299.3	307.7	312.1	311.5
27,5°	321.7	321.1	318.3	313.5	305.9	296.3	288.3	285.7	287.9	294.7	304.5	315.3	322.7	323.7
30,0°	342.4	342.4	342.6	341.8	337.7	330.3	318.7	305.5	299.3	302.5	311.3	322.5	332.3	335.3
32,5°	353.4	354.6	358.2	362.4	365.8	364.8	357.2	343.0	326.1	317.9	323.9	331.7	341.4	347.0
35,0°	352.0	353.0	357.6	366.6	379.6	392.8	396.6	388.0	370.6	350.0	340.6	343.4	352.8	359.6
37,5°	350.0	351.2	355.2	364.0	378.8	401.0	422.4	431.4	420.8	398.2	370.8	360.2	366.4	372.8
40,0°	351.0	352.6	358.0	368.4	386.2	410.0	437.0	462.8	472.2	456.6	424.0	393.0	386.8	389.6
42,5°	339.8	343.2	353.4	370.6	395.2	425.0	458.4	489.2	515.2	519.0	492.6	448.0	421.8	413.6
45,0°	296.5	300.3	312.1	332.3	364.4	408.2	460.0	509.2	548.6	579.9	573.9	532.2	482.8	453.8
47,5°	231.9	235.5	245.7	264.9	295.5	339.2	401.0	474.8	550.4	612.3	650.1	637.5	583.9	531.2
50,0°	161.1	163.3	169.5	183.1	207.3	246.7	301.7	376.4	483.4	586.5	703.7	767.3	748.7	688.3
52,5°	103.0	104.2	107.0	114.2	127.3	152.5	195.7	255.9	347.2	482.4	675.5	874.0	970.4	953.0
55,0°	62.2	62.4	63.6	70.0	80.4	94.8	119.5	158.5	224.3	349.2	547.8	889.0	1204.9	1285.0
57,5°	44.6	45.2	45.8	48.8	56.0	68.8	88.0	111.4	143.9	211.7	374.6	724.9	1276.0	1547.3
60,0°	36.4	37.4	39.4	41.2	44.2	51.8	72.6	101.8	112.2	134.5	230.9	484.8	1043.9	1524.9
62,5°	31.8	33.0	35.0	35.6	35.8	37.0	59.2	85.6	92.2	99.2	115.1	260.7	657.9	1153.3
65,0°	28.4	29.8	31.6	33.0	32.8	33.0	47.2	62.8	65.4	59.8	83.4	157.7	354.2	717.7
67,5°	24.6	26.2	28.0	29.8	31.0	31.4	40.6	46.4	40.6	44.8	64.6	113.8	187.7	391.6
70,0°	20.4	21.8	23.6	24.8	26.0	26.8	32.8	36.6	35.8	38.2	48.0	83.6	123.7	216.5
72,5°	15.6	16.8	17.6	18.6	20.2	21.4	25.2	26.8	28.2	38.0	37.4	49.4	80.8	122.7
75,0°	11.6	12.4	12.6	13.4	14.8	16.2	19.0	19.8	21.6	29.8	29.0	24.8	45.8	68.8
77,5°	8.8	9.6	9.4	9.8	10.4	12.0	13.8	13.8	16.8	21.8	19.8	16.4	19.2	27.4
80,0°	5.2	6.2	6.2	6.4	6.8	8.0	8.8	10.6	13.2	14.4	10.6	10.6	11.8	15.2
82,5°	2.6	3.2	3.4	3.6	4.4	4.4	5.2	6.2	7.4	6.2	5.8	6.4	7.2	8.6
85,0°	1.0	1.0	1.2	1.2	1.6	1.8	2.0	2.6	2.2	2.4	2.8	3.0	3.4	4.0
87,5°	0.4	0.4	0.4	0.4	0.6	0.6	0.8	0.8	1.0	1.0	1.0	1.2	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> <b>59560_60</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	240.3	239.1	238.3	237.3	235.9	235.3	234.9	234.5	233.7	233.1	232.3	231.3	230.5	229.7
5,0°	245.7	244.3	242.1	240.1	237.7	236.1	234.9	233.5	231.5	229.5	227.7	225.9	224.3	222.7
7,5°	251.9	249.3	246.7	243.5	240.1	237.5	235.3	232.9	230.3	227.5	224.5	221.9	219.5	217.5
10,0°	257.9	254.3	250.9	247.3	242.9	239.3	236.1	232.7	228.7	224.7	220.9	217.9	215.5	213.1
12,5°	266.1	260.9	256.7	252.3	247.3	242.5	238.3	233.5	228.3	223.5	219.1	215.1	211.1	207.1
15,0°	276.5	269.3	263.3	257.9	252.5	246.9	241.5	235.3	229.1	223.3	218.1	211.9	206.9	201.9
17,5°	287.3	279.1	270.3	263.3	257.3	251.3	244.5	237.7	231.1	224.5	216.9	209.7	201.7	194.1
20,0°	291.1	288.5	277.7	268.1	260.9	254.7	246.9	239.3	232.1	224.3	215.3	204.7	194.5	184.5
22,5°	294.5	296.1	287.9	274.9	266.1	258.3	249.7	241.3	233.1	222.7	211.1	197.9	185.7	171.7
25,0°	305.3	301.1	298.9	284.5	272.5	263.1	253.3	244.1	233.9	221.3	205.3	190.1	173.7	158.7
27,5°	318.9	310.3	308.1	296.1	281.5	268.9	257.5	246.7	234.3	218.7	199.7	180.3	161.9	148.7
30,0°	331.9	322.7	315.1	307.5	290.3	275.1	261.5	248.5	233.1	213.5	191.7	169.5	152.7	138.1
32,5°	345.8	335.9	323.3	318.1	300.3	282.5	266.7	250.3	231.9	207.5	181.9	159.1	142.5	125.5
35,0°	358.8	349.0	334.1	326.9	311.3	290.7	271.1	251.1	227.7	198.5	169.5	147.5	130.7	118.5
37,5°	371.2	363.2	347.4	336.1	322.7	299.7	275.7	251.5	223.5	189.5	158.9	136.7	121.5	118.9
40,0°	386.2	378.4	362.0	345.8	330.9	305.9	277.7	248.9	216.3	178.1	147.1	128.3	117.7	116.7
42,5°	405.0	395.2	375.4	354.8	336.7	310.5	277.9	242.3	204.3	165.3	135.5	121.7	116.1	110.4
45,0°	432.8	412.8	389.6	370.0	350.4	322.3	282.5	236.3	189.1	149.3	121.9	115.3	112.0	106.2
47,5°	484.6	444.6	420.2	406.0	388.8	356.0	305.7	241.9	180.5	136.9	112.0	109.0	105.4	103.6
50,0°	604.1	529.8	500.8	498.2	482.4	435.4	361.2	269.9	183.7	130.1	106.0	100.4	96.6	99.0
52,5°	854.8	719.3	644.3	634.9	606.5	531.2	421.6	300.3	195.3	136.1	102.0	91.6	87.0	91.6
55,0°	1196.3	984.4	796.8	750.9	694.5	588.5	443.6	296.9	190.5	139.9	98.6	84.8	79.2	84.0
57,5°	1504.9	1269.4	933.4	829.2	747.9	606.9	431.4	269.9	171.3	140.7	101.2	82.6	76.6	74.2
60,0°	1555.3	1380.4	984.0	801.2	680.5	516.0	335.1	202.3	136.9	138.7	108.4	83.6	73.0	61.8
62,5°	1328.0	1252.8	899.8	663.1	541.4	403.6	239.9	138.5	101.2	125.5	111.8	84.4	64.4	52.8
65,0°	1069.7	1121.9	904.0	647.7	531.8	383.6	192.3	106.6	84.0	109.4	105.2	83.4	56.0	46.2
67,5°	779.7	1006.8	944.4	692.3	544.6	339.4	124.7	71.2	64.0	83.2	87.4	75.8	48.8	39.4
70,0°	501.4	771.1	818.0	668.3	519.2	258.5	70.2	49.6	46.0	57.2	68.0	61.8	41.0	32.2
72,5°	250.7	440.0	511.8	509.2	444.0	182.5	43.6	36.0	34.6	41.6	55.2	48.6	33.4	26.4
75,0°	117.7	196.7	230.9	295.9	278.7	108.2	27.2	22.4	25.6	30.8	42.6	37.0	24.8	20.4
77,5°	40.2	55.4	68.2	75.6	65.6	38.0	19.6	19.0	19.0	23.4	24.8	23.4	16.4	14.4
80,0°	19.4	24.2	44.8	67.6	65.6	33.0	16.6	17.6	12.4	15.2	12.2	10.2	9.2	8.2
82,5°	10.4	14.6	29.0	44.8	40.6	20.0	11.0	9.4	7.0	7.8	6.2	5.4	4.8	4.4
85,0°	4.8	7.0	8.6	8.2	6.8	5.6	4.6	4.2	3.6	3.0	2.6	2.2	2.2	2.0
87,5°	1.4	1.6	1.6	1.6	1.6	1.6	1.4	1.4	1.2	1.2	1.0	1.0	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> <b>59560_60</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	228.7	228.3	228.1	227.7	227.7	227.5	227.1	227.1	225.9	227.7	227.5	227.3	227.7	227.9
5,0°	221.3	220.3	219.3	218.5	217.9	217.3	216.9	216.7	217.3	217.3	217.3	217.5	218.1	218.9
7,5°	215.7	214.5	213.3	212.1	210.9	209.9	209.3	208.9	209.1	209.5	209.9	210.3	211.1	212.1
10,0°	210.5	207.7	205.5	203.9	203.3	202.5	201.5	201.1	201.7	201.7	202.1	203.1	203.7	204.3
12,5°	204.7	202.3	199.1	196.9	195.3	193.1	191.9	190.9	190.3	191.1	191.9	193.3	195.5	197.5
15,0°	196.7	192.5	188.7	185.1	181.7	177.9	175.1	173.3	174.1	173.1	175.1	177.9	181.5	185.1
17,5°	186.9	179.9	172.5	166.1	160.7	156.7	154.1	152.7	150.7	152.7	153.7	156.1	159.9	165.5
20,0°	173.7	163.3	155.5	150.3	146.3	143.1	140.7	139.1	139.5	138.7	140.1	142.5	145.7	149.7
22,5°	159.5	150.9	143.7	137.7	131.5	125.7	121.9	120.3	118.7	120.3	121.5	124.7	130.3	136.1
25,0°	148.7	139.3	129.5	120.5	117.7	117.9	118.5	118.7	118.5	118.7	118.5	117.3	116.5	118.5
27,5°	137.5	123.7	117.7	118.3	118.5	116.1	114.0	112.6	111.0	112.2	113.2	114.8	116.5	116.3
30,0°	122.7	117.3	118.9	115.3	111.0	108.4	108.0	107.0	106.6	106.2	106.4	106.2	108.2	112.6
32,5°	117.7	118.3	113.6	108.4	106.8	104.8	101.2	96.4	90.8	95.8	100.2	102.8	103.2	104.4
35,0°	118.9	112.6	106.6	105.8	101.6	89.4	78.4	71.0	68.6	68.8	75.0	86.4	99.0	102.6
37,5°	114.2	106.6	106.0	101.6	85.8	74.0	67.0	62.4	59.8	60.8	64.0	69.4	80.4	97.6
40,0°	108.4	106.6	104.8	86.4	75.2	68.8	63.6	59.4	57.0	58.0	61.0	65.0	70.6	81.2
42,5°	107.4	109.6	93.2	79.0	73.4	69.0	65.0	61.6	59.4	60.2	62.4	64.8	67.4	71.8
45,0°	109.2	103.0	83.2	77.4	72.8	68.0	64.0	61.0	59.0	59.4	61.2	63.6	67.4	69.8
47,5°	107.6	86.2	77.4	73.0	68.6	65.0	62.4	60.2	58.8	58.8	59.8	61.0	63.4	66.6
50,0°	97.2	73.2	69.8	67.2	64.6	62.6	61.2	59.8	58.6	58.6	58.8	59.0	60.0	62.4
52,5°	80.8	65.4	64.4	62.8	61.8	60.6	59.8	58.8	57.8	57.6	57.6	57.2	57.0	57.6
55,0°	66.6	59.2	61.8	59.6	59.4	58.2	56.8	55.4	54.8	54.6	55.0	54.8	54.4	53.8
57,5°	57.2	53.2	63.0	58.4	55.8	53.8	52.6	51.4	50.8	50.4	50.6	50.6	49.6	51.2
60,0°	50.2	47.6	64.4	54.0	48.2	47.8	47.2	46.4	46.6	45.8	45.8	45.2	43.6	45.8
62,5°	45.2	43.0	58.0	48.6	40.4	39.6	38.6	37.8	36.0	37.2	37.4	36.8	36.2	38.4
65,0°	41.2	39.0	49.2	43.6	35.6	33.8	32.0	30.6	29.8	29.6	30.0	30.2	30.6	35.6
67,5°	36.8	34.6	40.4	40.0	33.0	29.4	27.8	26.6	25.0	25.6	25.8	26.2	27.2	33.6
70,0°	30.8	30.4	32.8	35.4	29.2	25.2	23.4	22.4	21.8	21.4	21.6	22.2	23.6	31.0
72,5°	24.8	24.6	26.6	29.8	25.2	21.0	19.2	18.6	17.6	17.8	17.4	18.0	20.0	26.0
75,0°	19.4	18.8	20.8	24.0	20.4	16.6	15.0	14.6	14.4	13.8	13.4	14.0	16.2	19.4
77,5°	13.8	13.8	14.6	17.8	16.2	12.6	11.0	10.8	9.8	10.0	9.8	10.2	11.8	13.6
80,0°	7.8	8.8	9.2	11.0	11.2	8.2	7.2	7.2	7.0	6.6	6.2	6.8	7.2	8.4
82,5°	4.2	4.2	4.8	6.4	5.2	4.4	4.4	4.4	4.0	4.0	3.6	3.4	3.2	4.0
85,0°	1.8	1.8	1.6	1.6	2.0	1.6	1.4	1.2	1.2	1.0	1.0	1.2	1.2	1.6
87,5°	0.6	0.6	0.6	0.6	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> <b>59560_60</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	228.1	228.5	229.1	229.7	230.7	231.3	231.9	232.7	233.3	234.5	235.1	236.1	236.9	237.7
5,0°	219.7	220.7	222.1	223.3	224.7	225.9	227.5	229.3	231.5	233.9	235.7	237.9	239.5	240.9
7,5°	213.3	214.7	216.1	217.5	219.5	221.9	224.3	226.7	229.5	233.1	236.7	240.1	242.3	244.5
10,0°	205.9	208.3	211.3	213.7	215.9	218.5	221.3	224.5	228.1	232.3	236.9	241.3	244.5	247.9
12,5°	199.5	202.9	205.3	207.3	211.1	215.1	218.5	221.9	226.3	231.3	236.9	242.3	246.1	250.7
15,0°	189.1	193.1	197.7	201.9	205.9	210.5	215.5	219.9	224.9	230.5	236.9	243.1	247.7	253.1
17,5°	172.5	179.5	186.1	193.1	199.3	206.3	212.5	218.5	224.3	230.9	238.5	245.3	250.5	257.1
20,0°	155.1	162.5	172.3	181.7	190.9	200.5	209.3	217.7	224.5	231.7	240.3	247.7	253.9	261.7
22,5°	142.3	148.7	156.3	167.7	180.7	192.7	205.1	215.7	225.1	233.7	243.3	251.3	258.9	268.9
25,0°	126.5	136.5	145.5	154.9	168.9	184.3	199.3	214.1	226.1	235.7	246.5	255.3	264.3	277.1
27,5°	114.8	119.5	132.7	144.7	156.3	174.3	192.1	209.3	224.1	235.9	248.1	258.5	269.7	285.1
30,0°	115.7	114.4	118.3	133.5	147.5	161.9	183.1	203.9	222.1	236.1	250.3	262.5	276.5	295.1
32,5°	109.6	115.7	114.6	120.3	136.5	151.1	172.5	196.3	219.5	237.5	253.1	267.5	285.1	304.7
35,0°	102.8	108.8	116.3	114.6	124.7	140.7	160.7	188.7	217.3	239.3	257.5	273.9	295.1	311.5
37,5°	103.0	102.6	110.6	114.9	115.7	129.7	150.3	180.1	213.5	240.7	262.3	280.5	305.1	318.5
40,0°	99.4	100.8	102.6	113.0	113.6	121.5	141.1	171.9	207.1	238.5	264.7	286.7	313.5	329.9
42,5°	84.4	100.0	95.8	105.0	112.8	117.1	129.5	157.5	193.9	231.5	263.9	291.3	318.3	338.9
45,0°	74.0	89.4	90.2	97.4	109.8	112.4	115.7	140.9	179.5	223.5	264.1	297.7	325.9	348.8
47,5°	69.4	74.4	87.4	91.8	102.0	106.0	104.6	124.1	162.3	209.7	253.9	292.5	323.7	353.2
50,0°	64.0	66.0	80.2	87.0	90.6	96.2	98.2	107.2	125.5	153.3	180.5	207.5	239.3	279.3
52,5°	59.2	60.0	65.4	80.2	78.2	86.0	93.0	86.0	73.4	82.8	93.2	103.2	124.1	154.1
55,0°	54.8	54.6	55.2	69.8	66.2	76.2	88.8	79.4	51.0	58.8	69.0	75.2	87.8	100.4
57,5°	53.8	47.4	49.6	57.8	57.0	66.2	83.8	82.6	50.6	59.2	73.2	83.8	98.4	110.8
60,0°	55.6	44.0	44.0	47.6	50.4	58.0	77.2	79.0	52.8	63.0	85.6	103.6	124.1	138.5
62,5°	51.8	41.2	39.2	41.0	44.2	50.4	63.0	64.6	54.8	72.0	107.6	147.3	183.5	204.5
65,0°	47.2	37.6	35.0	36.2	39.0	41.8	48.2	53.4	55.8	79.6	127.5	193.5	251.9	292.9
67,5°	39.4	32.0	31.2	31.6	33.4	32.8	38.6	48.0	55.6	76.6	127.9	207.9	291.5	359.6
70,0°	31.2	26.8	27.2	27.0	28.6	27.2	34.2	44.4	53.6	70.8	110.4	189.5	288.1	374.0
72,5°	23.6	22.0	22.8	22.0	24.0	23.6	31.2	40.6	47.8	58.0	82.6	147.9	240.5	309.1
75,0°	17.6	18.0	17.8	18.0	20.0	20.0	27.8	37.2	39.4	41.0	53.2	104.4	178.7	213.7
77,5°	12.6	13.4	13.0	13.4	14.6	14.8	19.4	23.8	27.0	24.2	26.2	49.0	84.0	97.2
80,0°	8.2	9.0	8.4	8.2	8.6	8.6	10.4	12.0	13.0	11.2	9.6	10.8	12.4	15.8
82,5°	4.8	5.0	4.6	4.4	4.4	4.6	5.2	5.8	6.2	5.8	5.0	4.2	3.4	5.2
85,0°	1.8	2.0	2.0	2.2	2.2	2.4	2.4	2.4	2.4	2.6	2.4	2.0	1.6	2.0
87,5°	0.6	0.8	1.0	1.2	1.2	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> <b>59560_60</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
$\gamma$	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	238.3	239.1	239.9	240.5	241.5	242.7	243.5	244.5	245.5	246.3	246.9	247.5	248.1	248.5
5,0°	242.5	244.3	246.3	247.3	249.1	250.7	252.5	254.3	255.9	257.3	258.3	259.3	260.3	261.1
7,5°	247.3	250.3	252.9	255.3	258.5	261.3	263.9	267.3	270.3	272.1	274.7	276.5	278.3	279.1
10,0°	251.5	255.5	259.7	263.5	268.5	273.5	278.3	282.9	284.5	282.1	278.7	276.3	275.1	274.3
12,5°	255.5	260.9	266.3	272.5	279.5	284.3	281.5	278.1	278.1	278.9	278.7	278.1	277.1	276.1
15,0°	259.5	266.3	273.5	281.9	281.7	277.1	279.1	280.9	281.7	280.9	279.7	277.9	276.5	274.9
17,5°	265.1	273.5	283.3	280.9	279.1	283.1	284.7	284.5	283.7	282.1	279.7	277.3	274.9	272.7
20,0°	271.5	283.5	283.9	282.5	287.7	289.9	289.3	287.3	284.7	281.3	277.9	274.5	271.7	269.7
22,5°	281.1	290.7	287.1	293.7	297.5	296.5	293.1	288.3	283.3	279.1	275.3	271.9	270.7	270.1
25,0°	293.7	293.1	298.3	306.1	306.3	302.5	295.5	288.3	282.1	277.7	275.3	276.1	278.9	283.3
27,5°	299.5	301.3	310.7	317.3	314.9	307.7	298.5	290.5	284.3	281.7	285.1	293.7	303.9	312.1
30,0°	302.3	311.5	322.3	326.3	322.5	313.1	303.5	295.3	291.7	297.9	311.5	324.9	334.3	339.1
32,5°	309.3	322.7	333.5	335.5	330.1	319.7	309.7	305.9	313.7	331.1	347.8	358.6	362.4	360.6
35,0°	319.7	333.9	345.0	346.6	340.6	329.1	322.9	331.7	353.8	374.4	387.4	388.6	378.8	368.2
37,5°	331.3	345.4	356.2	359.4	353.4	343.8	347.6	373.6	402.4	420.4	418.8	402.2	383.0	368.8
40,0°	347.2	361.6	370.4	374.4	371.2	368.4	392.0	431.4	457.4	459.0	438.6	413.6	391.0	374.4
42,5°	361.0	381.0	390.8	395.0	397.8	414.4	460.0	499.4	509.8	489.8	459.6	428.0	398.8	374.2
45,0°	372.6	399.4	418.6	430.4	447.8	492.8	547.2	569.1	549.2	506.2	458.2	408.4	365.4	334.9
47,5°	382.0	416.0	449.8	488.6	528.8	590.7	627.9	609.9	549.0	474.6	401.8	341.0	295.7	265.1
50,0°	325.9	388.2	467.4	556.6	615.3	681.1	683.7	596.9	481.2	379.6	299.7	240.3	201.5	178.9
52,5°	191.9	261.7	368.6	500.4	588.1	676.7	649.5	495.2	356.8	255.9	188.9	144.1	120.1	109.0
55,0°	112.2	146.7	225.9	330.9	426.6	522.0	488.6	339.4	222.3	150.3	110.8	86.2	73.6	64.6
57,5°	118.7	141.1	185.5	232.7	299.9	327.9	303.3	194.3	103.6	94.0	78.4	61.0	47.8	42.0
60,0°	153.5	193.7	235.9	243.1	243.9	222.1	185.5	112.2	61.6	52.2	62.4	44.0	36.8	35.6
62,5°	235.3	299.3	333.3	288.9	201.1	157.3	119.1	83.2	49.4	38.0	39.0	30.4	29.8	29.8
65,0°	352.4	428.0	419.8	296.7	149.5	115.5	97.2	76.0	42.2	31.4	28.4	27.0	26.8	28.4
67,5°	448.0	504.4	426.4	229.7	98.8	89.6	78.6	65.2	35.6	26.8	26.0	25.0	25.6	26.0
70,0°	471.6	477.6	352.0	147.3	71.2	69.4	60.0	43.4	30.0	23.8	22.0	21.6	21.4	21.2
72,5°	379.8	349.0	228.3	89.8	53.0	51.4	38.2	27.2	22.8	18.6	17.8	17.4	16.4	15.8
75,0°	236.3	204.9	128.1	54.8	36.2	24.2	20.6	19.8	16.4	14.2	13.8	13.0	12.0	11.2
77,5°	107.2	94.0	58.4	30.4	19.8	15.8	14.4	13.4	12.2	10.6	10.4	8.6	8.2	8.0
80,0°	24.2	29.4	22.4	15.6	11.4	9.2	8.8	8.6	9.4	8.0	7.2	5.4	5.0	5.0
82,5°	8.6	10.2	9.0	7.2	5.8	4.8	4.4	4.4	5.0	4.8	4.4	3.2	3.0	2.8
85,0°	2.6	3.0	2.8	2.4	2.2	2.0	1.8	1.6	1.6	1.6	1.6	1.2	1.2	1.0
87,5°	1.2	1.0	1.0	1.0	0.8	0.8	0.6	0.6	0.4	0.4	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> 59560_60
--	--	------------------------------

**sITeco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
<b>Luminous intensity in cd/lm</b>				
<b>Luminous flux in lm/klm</b>				
0,0°	236.4	236.4	0.4	0.4
2,5°	248.9	248.9	2.8	3.2
5,0°	261.9	262.1	5.7	8.9
7,5°	280.3	280.1	8.7	17.6
10,0°	274.3	273.7	11.5	29.1
12,5°	275.9	275.3	14.3	43.4
15,0°	274.1	273.3	17.0	60.4
17,5°	271.3	270.3	19.4	79.8
20,0°	268.1	267.3	21.8	101.6
22,5°	270.3	270.1	24.2	125.8
25,0°	287.7	290.3	26.8	152.6
27,5°	317.7	320.1	29.8	182.4
30,0°	340.8	341.2	33.1	215.5
32,5°	356.8	354.0	36.5	252.0
35,0°	359.4	353.8	39.7	291.6
37,5°	358.8	352.6	43.0	334.6
40,0°	362.6	354.0	46.8	381.4
42,5°	356.4	344.0	50.9	432.3
45,0°	314.3	300.5	54.2	486.5
47,5°	244.9	234.3	56.3	542.9
50,0°	166.9	161.5	56.6	599.5
52,5°	104.2	102.0	54.6	654.1
55,0°	60.2	60.4	52.6	706.7
57,5°	41.8	42.8	51.6	758.2
60,0°	35.8	35.4	48.4	806.6
62,5°	31.4	31.0	42.1	848.7
65,0°	28.4	28.0	38.6	887.3
67,5°	25.0	24.6	35.2	922.5
70,0°	21.0	20.6	29.7	952.2
72,5°	15.4	15.4	21.5	973.7
75,0°	10.8	11.2	13.5	987.2
77,5°	8.2	8.4	6.5	993.7
80,0°	5.2	5.2	3.5	997.2
82,5°	2.6	2.6	1.9	999.1
85,0°	1.0	1.0	0.7	999.8
87,5°	0.4	0.4	0.2	1000.0
90,0°	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> 59560_60
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19200	147.0	155.2	151.1
95	237	251	18238	137.0	144.6	140.8
90	221	249	17293	127.5	134.7	131.1
85	205	246	16311	118.4	124.8	121.6
80	190	243	15354	109.7	115.7	112.7
75	176	241	14424	101.7	107.2	104.4
70	162	238	13466	93.8	98.8	96.3
65	148	234	12483	85.9	90.5	88.2
60	135	231	11534	78.6	82.8	80.7
55	122	227	10559	71.4	75.1	73.2
50	110	223	9634	64.8	68.1	66.4
45	97	219	8608	57.6	60.5	59.0
40	86	214	7712	51.6	54.2	52.9
35	74	209	6717	44.9	47.3	46.1
30	63	203	5787	38.9	40.9	39.9
25	52	196	4835	33.0	34.5	33.8
20	41	187	3863	27.1	28.3	27.7
15	30	176	2871	21.2	22.1	21.6
13	25	169	2414	18.5	19.2	18.8

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19880	148.5	156.9	152.7
95	238	252	18902	139.0	146.8	142.9
90	222	249	17891	129.6	136.9	133.2
85	207	247	16912	120.9	127.5	124.2
80	192	244	15902	112.1	118.4	115.2
75	178	241	14928	104.1	109.8	107.0
70	164	238	13931	96.1	101.3	98.7
65	150	235	12907	88.2	92.8	90.5
60	137	231	11926	80.8	85.1	82.9
55	124	228	10922	73.5	77.3	75.4
50	112	224	9972	66.8	70.2	68.5
45	99	219	8920	59.5	62.5	61.0
40	87	215	7923	52.8	55.5	54.2
35	76	210	6992	46.7	49.2	48.0
30	64	204	5959	40.1	42.0	41.0
25	53	197	4990	34.0	35.6	34.8
20	42	188	4004	28.1	29.2	28.6
15	31	177	2998	22.1	23.0	22.6
12	25	169	2443	18.8	19.6	19.2

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> 59560_60
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19570	147.7	156.0	151.8
95	237	251	18566	137.8	145.4	141.6
90	221	249	17585	128.2	135.4	131.8
85	206	246	16633	119.6	126.1	122.8
80	191	244	15648	111.0	117.1	114.0
75	177	241	14695	102.9	108.5	105.7
70	163	238	13715	94.9	100.0	97.4
65	149	234	12710	87.0	91.6	89.3
60	136	231	11743	79.7	83.9	81.8
55	123	227	10752	72.5	76.2	74.4
50	111	224	9814	65.7	69.1	67.4
45	98	219	8774	58.5	61.5	60.0
40	87	215	7868	52.5	55.1	53.8
35	75	209	6862	45.8	48.2	47.0
30	63	203	5835	39.2	41.2	40.2
25	52	196	4874	33.2	34.8	34.0
20	41	187	3893	27.3	28.5	27.9
15	30	176	2892	21.3	22.2	21.8
12	25	169	2432	18.7	19.4	19.0

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3G43S08MB</b> <b>EAN: 4058352729472</b>	<b>LP number</b> 59560_60
--	--	------------------------------

**Luminousfluxs table**



Temperature °C	Luminous flux lm	Power consumption W
25.0	19200.0	147.0
5.0	19880.0	148.5
15.0	19570.0	147.7