


Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
Version	post-top- or mounting to wall arm, shielding on building side, Smart Interface up/down	serial documentation 18.03.2024
Optic	asymmetric, wide distribution (ST1.2a)	
Cover	cover transparent, PMMA	
Lamps	LED 3000 K CRI ≥ 70	
Controlgear	EVG SITECO iQ - Smart Interface	
Rated values	Net luminous flux = 4770 lm Power consumption = 33.5 W Luminous efficacy = 142.4 lm/W	

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 729 cd/klm**

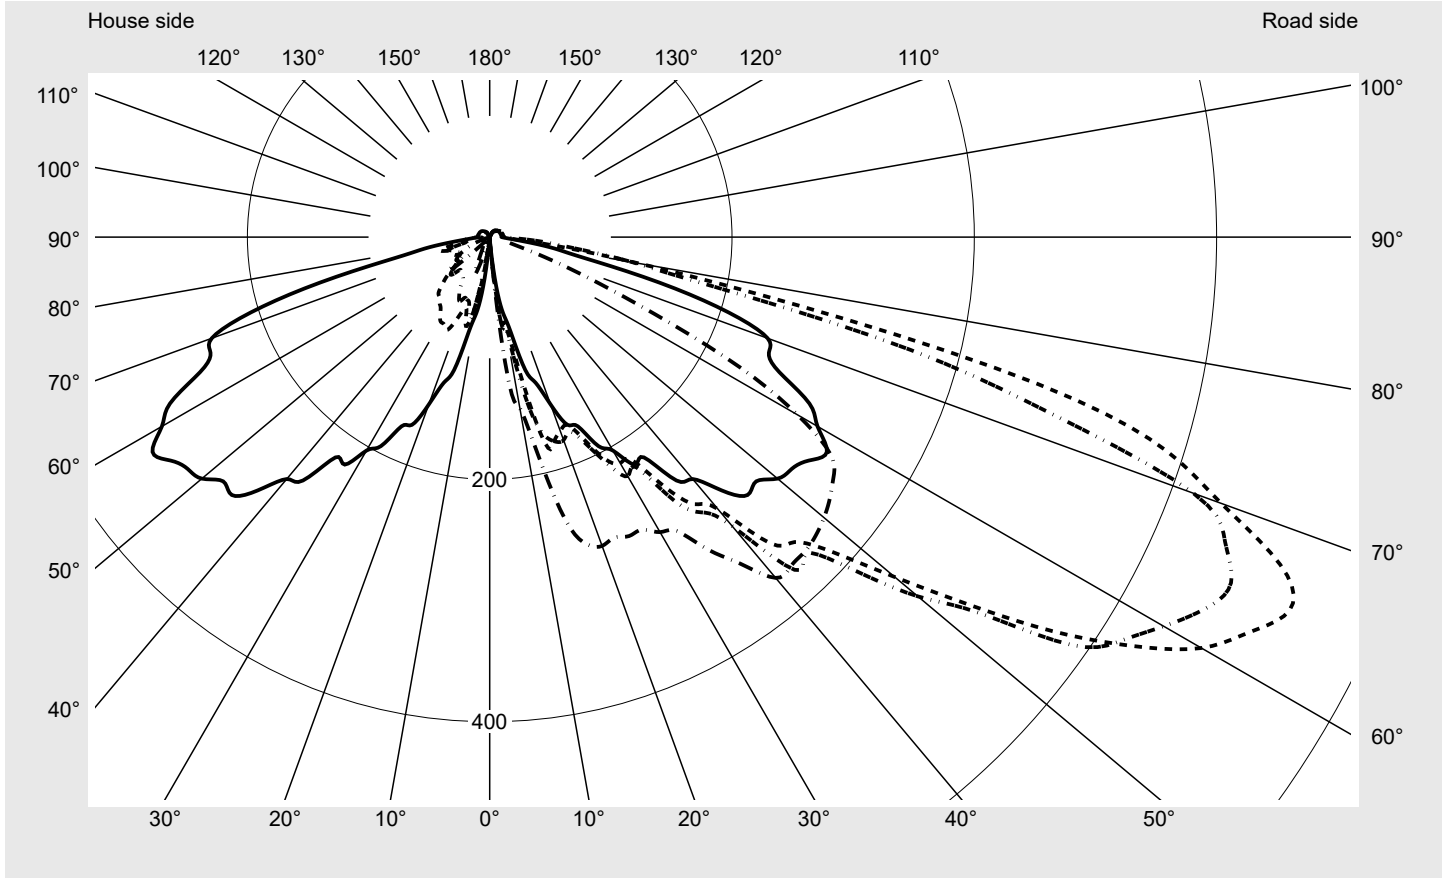

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	642.6
Imax 80°	150.2
Imax 90°	11.9
Imax >90°	11.6
Imax >95°	11.6


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
---------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

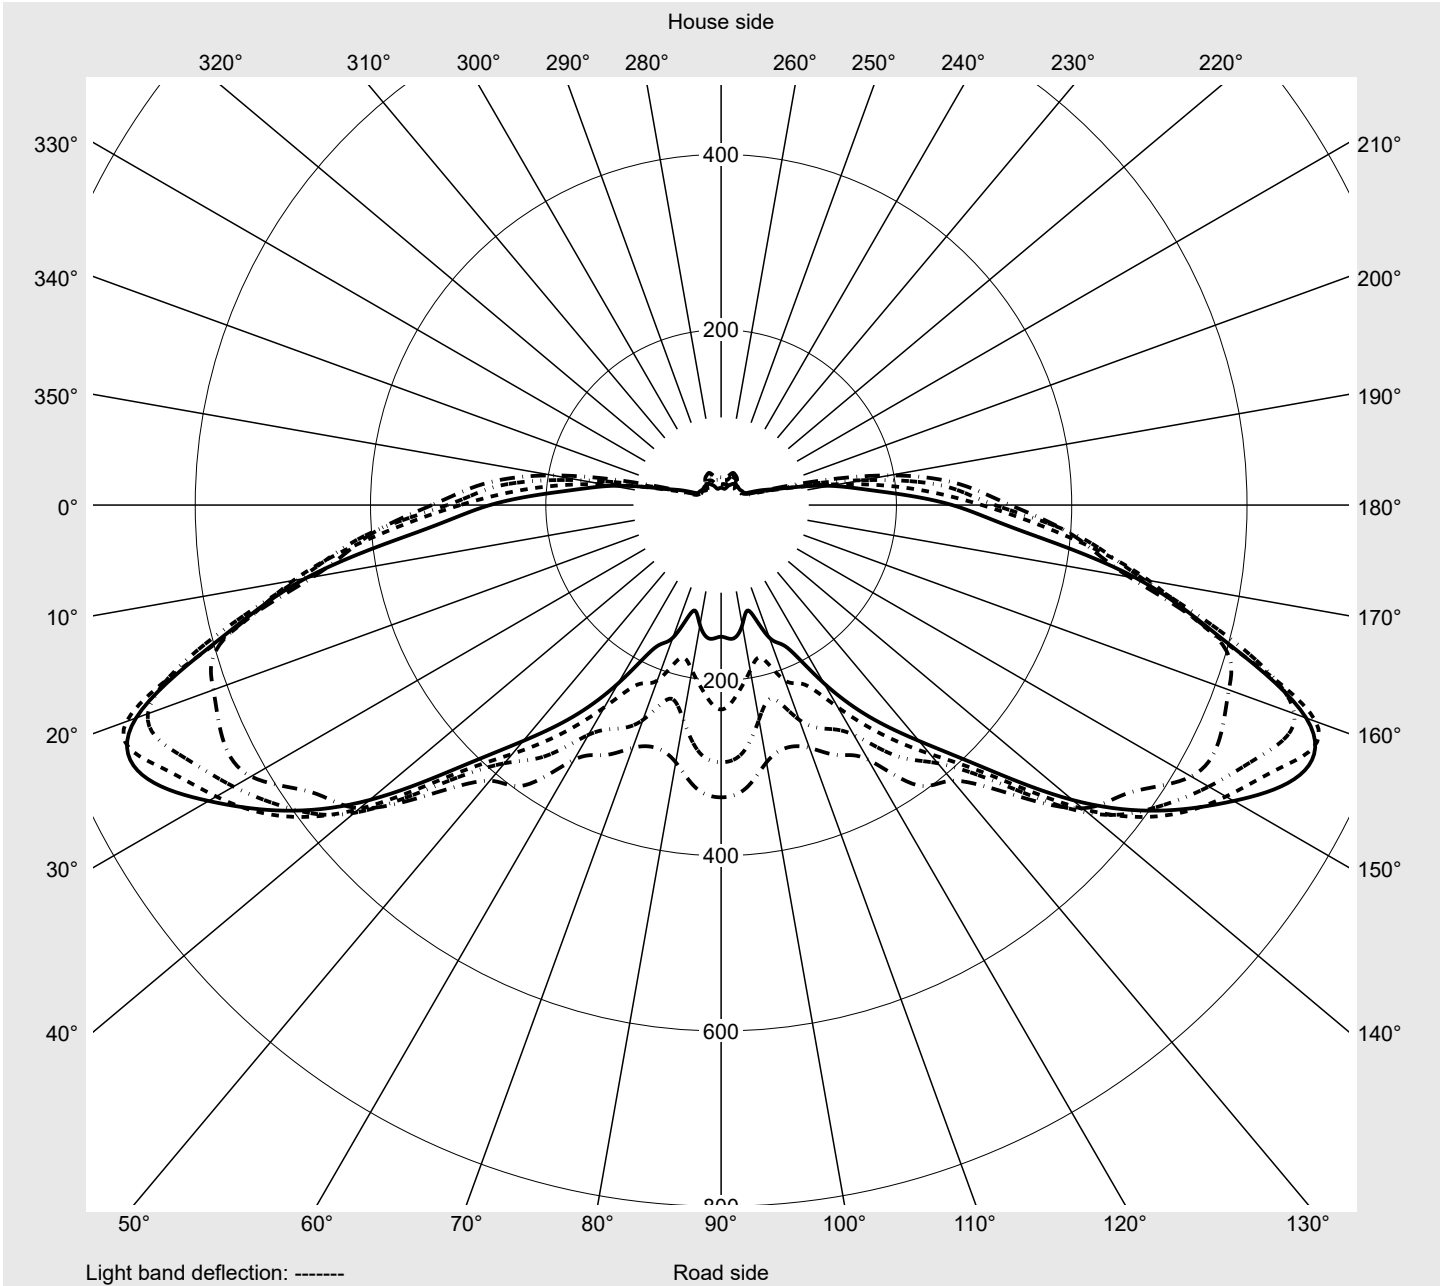

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
Table of values for luminous intensities		Maximum luminous intensity



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	4.0	4.0	4.1	4.1	4.5	4.5	4.6	4.8	5.0	5.1	5.3	5.5	5.6
5,0°	8.6	9.9	11.2	13.1	14.9	17.0	19.5	21.8	24.1	25.8	26.6	27.0	27.8
7,5°	40.9	50.4	56.9	63.5	69.1	71.0	70.3	69.6	69.0	69.6	72.1	77.9	83.7
10,0°	63.8	63.2	65.2	69.3	74.1	74.4	74.6	79.4	89.6	99.9	112.0	123.2	130.7
12,5°	80.4	82.9	86.7	91.3	106.4	113.5	133.3	149.2	158.0	155.5	152.5	155.1	159.9
15,0°	113.6	119.1	133.3	145.2	161.9	175.8	167.2	172.3	177.3	176.5	175.0	178.0	184.4
17,5°	126.0	142.1	174.5	165.9	173.7	177.0	176.6	186.6	187.6	195.2	196.2	197.3	199.8
20,0°	147.0	152.0	165.7	165.4	171.4	170.4	178.3	177.5	178.1	187.1	192.2	197.0	204.8
22,5°	167.7	170.9	177.8	175.0	173.5	167.9	173.7	180.6	186.6	192.2	199.0	208.1	219.0
25,0°	172.3	171.9	185.2	193.4	190.7	184.4	188.6	195.8	200.3	206.9	214.5	222.3	237.2
27,5°	194.5	195.3	197.8	199.0	201.8	206.6	211.2	218.3	213.7	226.9	238.5	246.3	257.4
30,0°	203.4	209.6	215.0	208.9	214.2	215.5	227.8	243.0	248.4	250.7	264.0	275.7	285.5
32,5°	222.6	219.8	215.5	215.4	210.6	218.2	225.3	238.5	261.8	274.6	288.5	290.9	306.0
35,0°	222.0	231.6	239.2	240.2	231.4	251.4	265.5	281.2	297.4	314.6	320.4	323.4	331.0
37,5°	253.2	256.7	257.4	257.4	260.2	277.9	286.3	306.3	322.4	333.1	352.5	349.8	355.3
40,0°	260.7	261.3	269.4	268.8	270.3	292.8	311.3	335.9	343.0	364.5	370.7	377.4	389.2
42,5°	283.7	283.7	292.8	296.1	317.7	342.7	372.5	386.5	394.3	411.5	410.2	403.1	400.4
45,0°	301.0	298.4	310.3	307.8	319.2	355.9	369.5	402.4	419.3	435.3	442.1	421.6	419.6
47,5°	298.4	295.9	318.6	331.0	348.3	385.4	405.7	438.6	442.3	440.6	446.9	433.3	428.1
50,0°	310.1	326.3	356.8	383.4	382.6	436.5	461.3	473.2	457.0	447.6	443.9	427.4	417.6
52,5°	314.3	357.4	382.1	464.1	456.2	498.2	509.8	507.8	482.6	465.1	443.4	428.2	399.1
55,0°	321.5	386.0	413.2	520.7	542.2	567.0	587.2	541.4	521.5	470.9	433.8	415.3	360.1
57,5°	330.0	404.2	473.0	586.0	616.4	627.9	619.3	571.0	538.2	465.6	410.5	390.2	335.4
60,0°	312.4	409.5	489.9	608.0	696.0	678.3	642.4	602.6	546.3	448.4	384.6	349.7	302.7
62,5°	297.6	393.0	495.5	589.2	722.0	706.6	665.1	617.6	539.7	436.7	370.7	318.9	266.5
65,0°	263.8	345.9	481.5	593.0	710.4	728.6	675.2	607.8	523.5	423.4	351.3	294.9	234.9
67,5°	249.4	304.0	438.0	553.9	690.7	706.3	657.0	591.5	495.9	393.7	327.8	266.0	198.6
70,0°	244.1	320.5	436.3	547.3	631.2	642.6	618.3	523.8	437.2	354.9	294.2	233.9	170.0
72,5°	206.7	321.2	378.3	518.4	592.5	585.0	488.6	442.1	353.0	281.0	224.9	180.3	142.7
75,0°	144.9	254.2	323.7	447.9	476.0	468.2	359.4	314.6	224.8	185.2	174.8	160.4	131.0
77,5°	80.9	145.2	212.5	286.0	316.1	262.0	192.0	169.4	143.1	125.0	125.9	124.9	113.0
80,0°	54.6	73.6	106.5	132.7	150.2	124.5	120.1	129.3	99.2	70.3	53.4	46.3	53.1
82,5°	31.4	39.5	44.3	57.2	65.2	54.3	70.6	90.5	73.3	44.7	25.8	21.2	15.5
85,0°	17.7	19.2	17.5	17.4	16.4	21.7	43.5	52.9	39.0	23.5	16.5	14.4	12.7
87,5°	12.4	12.4	12.6	13.1	13.9	16.2	20.8	21.5	16.4	12.7	12.7	12.1	11.7
90,0°	9.9	10.4	10.8	11.1	11.4	11.6	11.6	11.6	11.6	11.4	11.6	11.4	11.4
92,5°	9.8	10.3	10.8	11.1	11.2	11.4	11.4	11.6	11.4	11.4	11.4	11.4	11.2
95,0°	9.8	10.1	10.4	10.8	11.1	11.4	11.4	11.4	11.4	11.4	11.4	11.2	11.2
97,5°	9.8	10.1	10.4	10.8	11.1	11.1	11.4	11.4	11.4	11.2	11.2	11.2	11.2
100,0°	9.8	9.9	10.3	10.6	10.9	11.1	11.1	11.1	11.2	11.2	11.2	11.1	11.2
102,5°	9.4	9.8	10.1	10.4	10.8	11.1	11.1	11.1	11.1	11.1	11.2	11.1	11.2
105,0°	9.4	9.8	9.9	10.3	10.8	10.8	11.1	11.1	11.1	11.1	10.9	10.9	10.9
107,5°	9.3	9.4	9.8	10.1	10.4	10.8	10.8	10.8	10.8	10.8	10.9	10.9	10.9
110,0°	9.3	9.4	9.6	9.8	10.3	10.4	10.6	10.8	10.8	10.8	10.6	10.6	10.6
112,5°	9.1	9.4	9.4	9.8	10.1	10.3	10.4	10.4	10.4	10.4	10.6	10.4	10.6

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
---------------------------	--	------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	5.6	5.8	6.0	6.3	6.3	6.3	4.0	4.0	4.0	3.8	3.8	4.0	4.0
5,0°	27.6	26.8	25.8	24.6	23.2	23.2	7.8	7.3	6.3	5.6	5.5	5.1	5.0
7,5°	93.8	102.9	110.2	112.8	120.4	120.4	38.0	27.1	21.3	14.1	10.9	7.3	6.0
10,0°	138.6	142.4	143.9	144.9	143.1	143.2	66.0	65.8	64.0	55.1	39.2	26.0	17.4
12,5°	169.0	176.5	184.8	188.7	185.7	183.6	75.1	71.9	69.8	66.2	64.7	65.3	58.1
15,0°	198.1	213.7	226.3	232.9	237.0	241.8	106.5	89.0	85.2	77.1	75.9	66.2	56.4
17,5°	209.9	223.1	240.0	254.4	263.5	265.6	111.0	93.5	82.9	70.1	63.7	56.6	50.0
20,0°	214.4	231.1	245.3	260.7	270.4	271.3	133.5	116.6	100.1	84.7	64.2	54.9	41.8
22,5°	221.5	229.1	245.3	259.5	262.3	268.6	154.8	139.6	117.3	101.9	76.6	54.3	35.6
25,0°	245.6	249.8	259.5	267.5	271.8	272.2	159.1	147.9	122.9	101.6	84.7	58.4	40.2
27,5°	265.0	271.9	276.2	276.2	274.4	272.2	174.7	158.8	134.8	101.6	81.4	54.6	33.7
30,0°	292.8	287.5	282.2	282.7	280.4	281.2	193.7	170.2	141.3	109.7	80.7	49.0	30.9
32,5°	307.8	305.3	294.2	292.6	287.5	287.8	205.8	184.3	148.0	110.0	76.1	41.4	28.6
35,0°	331.8	320.4	310.3	311.1	312.1	315.3	211.9	183.9	146.9	111.0	70.6	39.4	27.6
37,5°	357.9	359.1	344.4	337.3	336.9	339.7	242.3	207.2	165.1	121.4	68.1	38.0	29.3
40,0°	390.8	381.1	351.8	347.0	354.8	367.2	253.6	214.4	161.6	117.6	64.5	37.0	31.3
42,5°	406.2	388.0	355.3	359.6	366.7	368.2	262.5	216.8	163.4	110.3	62.5	36.9	33.9
45,0°	415.0	391.2	354.8	360.2	366.7	367.5	291.4	239.0	173.7	106.2	55.4	43.7	41.5
47,5°	419.8	379.1	355.6	361.1	366.9	364.9	286.5	223.1	151.7	90.1	48.1	43.0	37.4
50,0°	412.0	365.5	345.5	355.6	362.9	360.2	287.3	224.4	148.0	79.7	38.4	35.9	31.1
52,5°	387.5	351.1	336.3	344.2	353.3	354.0	287.8	222.1	131.0	65.8	34.1	31.3	27.8
55,0°	352.3	329.5	321.9	328.0	344.7	346.3	287.5	216.2	115.8	56.9	32.6	27.8	25.5
57,5°	314.8	294.7	286.8	298.1	324.3	333.4	273.2	195.0	95.6	42.8	30.3	27.3	26.3
60,0°	281.5	260.8	228.7	248.6	283.5	293.4	253.7	163.2	81.0	37.0	28.6	26.3	26.6
62,5°	226.1	213.0	180.9	191.5	215.8	233.2	217.2	137.0	71.1	43.7	31.9	27.3	27.0
65,0°	180.1	161.1	125.4	138.9	153.0	150.2	180.6	126.4	74.4	49.8	33.1	29.3	28.4
67,5°	145.9	111.5	76.7	86.5	92.3	89.3	174.8	115.6	71.6	46.0	33.7	30.6	31.1
70,0°	121.7	84.9	44.0	40.7	44.0	48.6	168.0	115.1	72.3	42.2	34.1	32.1	32.7
72,5°	98.4	53.8	27.8	21.5	20.8	22.8	150.3	105.9	66.5	41.4	37.9	35.2	26.5
75,0°	78.6	27.0	19.5	16.2	15.7	15.5	104.4	78.7	60.4	41.4	42.0	29.6	16.5
77,5°	46.3	18.9	15.4	14.1	13.9	14.2	61.4	54.1	50.9	38.0	32.9	20.5	14.7
80,0°	17.9	14.6	13.6	13.2	13.4	13.6	47.5	45.8	40.4	30.6	23.2	21.0	16.0
82,5°	13.7	12.9	12.7	12.7	12.9	12.9	30.4	29.8	28.1	21.2	19.5	16.5	13.4
85,0°	12.2	12.1	12.1	12.2	12.2	12.2	17.4	18.5	19.7	21.2	19.2	16.4	11.9
87,5°	11.7	11.7	11.7	11.9	11.9	12.2	12.6	13.6	14.9	15.1	14.1	12.7	11.1
90,0°	11.6	11.6	11.6	11.7	11.6	11.9	9.4	9.3	8.8	8.3	7.8	7.3	6.6
92,5°	11.4	11.4	11.6	11.6	11.6	11.6	9.4	9.1	8.6	8.1	7.8	7.1	6.5
95,0°	11.2	11.4	11.6	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
97,5°	11.2	11.2	11.6	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
100,0°	11.2	11.2	11.2	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
102,5°	11.2	11.2	11.2	11.4	11.6	11.6	9.1	8.8	8.4	8.1	7.4	7.1	6.5
105,0°	10.9	11.2	11.2	11.2	11.2	11.6	9.1	8.8	8.4	8.1	7.4	6.8	6.5
107,5°	10.9	10.9	11.2	11.2	11.2	11.2	9.1	8.8	8.4	7.8	7.4	6.8	6.5
110,0°	10.8	10.9	10.9	10.9	11.1	11.2	8.9	8.8	8.4	7.8	7.4	6.8	6.3
112,5°	10.6	10.6	10.8	10.9	10.9	10.9	8.8	8.8	8.4	7.8	7.4	6.8	6.3

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	0.0	0.0
2,5°	4.1	4.5	4.6	5.0	5.3	5.3	4.6	4.6	4.3	4.1	4.3	0.1	0.1
5,0°	4.8	4.6	4.3	4.0	3.6	3.6	3.6	3.5	3.5	3.5	3.3	0.3	0.4
7,5°	5.0	4.6	4.6	4.6	4.5	4.5	4.1	4.0	3.8	3.8	3.6	1.6	2.0
10,0°	11.9	8.6	6.9	5.5	4.6	4.5	4.6	4.6	4.3	4.0	4.0	3.0	5.0
12,5°	42.2	26.0	15.9	7.9	4.6	4.3	4.6	4.8	4.6	4.5	4.3	5.3	10.3
15,0°	53.9	53.8	50.6	38.7	25.3	15.9	7.3	4.8	4.1	4.0	4.0	8.1	18.5
17,5°	43.2	38.0	35.6	35.2	34.2	32.4	29.3	20.8	11.6	7.6	6.6	10.2	28.6
20,0°	33.4	29.4	28.4	26.8	25.6	24.3	23.8	23.8	24.1	27.5	27.5	11.8	40.4
22,5°	27.5	24.3	23.0	20.7	19.8	19.2	20.5	20.2	22.8	30.8	32.1	13.6	54.0
25,0°	29.9	23.3	19.7	18.4	17.0	17.2	22.2	18.5	18.4	22.5	22.5	15.9	69.9
27,5°	27.5	22.3	19.0	17.2	15.4	15.5	18.5	14.9	14.1	16.5	16.5	18.4	88.3
30,0°	26.8	22.8	19.2	17.4	15.7	14.7	15.7	13.1	11.6	13.1	12.9	21.2	109.5
32,5°	25.3	22.3	19.2	17.2	15.1	13.6	13.6	11.6	10.1	10.9	10.9	23.6	133.2
35,0°	25.5	22.3	18.9	17.4	14.9	13.4	12.2	10.6	9.1	9.4	9.6	27.3	160.4
37,5°	24.8	21.7	18.7	16.9	14.6	12.7	11.2	9.6	8.3	8.4	8.6	31.5	191.9
40,0°	27.8	23.0	19.4	16.2	15.1	12.9	10.8	8.8	7.8	7.4	7.6	35.0	227.0
42,5°	31.6	26.3	20.5	18.0	15.9	15.1	11.2	8.9	6.8	6.3	6.0	39.6	266.6
45,0°	32.3	25.1	22.3	22.3	21.7	20.7	19.7	15.1	9.8	6.0	3.3	43.2	309.8
47,5°	31.9	25.6	26.5	30.3	31.8	30.3	28.4	25.5	24.6	15.2	15.2	46.2	356.0
50,0°	27.3	25.5	28.4	33.7	37.5	37.9	37.7	36.4	34.9	36.4	44.0	49.9	405.9
52,5°	25.1	24.1	27.0	33.2	39.2	41.0	42.0	42.8	46.1	40.2	34.7	53.4	459.3
55,0°	24.0	23.0	26.5	33.9	42.7	45.8	43.2	38.5	34.7	34.4	33.4	56.5	515.8
57,5°	25.1	24.8	26.5	31.3	35.9	38.0	39.0	34.9	32.4	32.1	31.8	58.3	574.1
60,0°	25.5	23.8	24.1	28.6	33.7	34.4	35.1	30.3	29.1	28.8	28.8	58.3	632.4
62,5°	26.0	24.5	26.0	28.1	31.3	31.1	29.3	25.3	24.1	24.1	23.5	56.7	689.1
65,0°	27.6	28.0	28.4	28.3	28.0	25.6	23.2	19.8	18.9	19.5	19.5	54.2	743.3
67,5°	30.6	29.9	25.3	18.9	19.8	17.2	15.9	14.6	14.6	14.9	14.6	50.2	793.5
70,0°	31.6	16.2	12.6	14.2	13.6	12.7	11.6	9.9	9.1	8.4	8.3	46.2	839.7
72,5°	14.1	10.3	10.1	10.4	9.3	8.9	8.6	7.9	6.3	4.8	4.6	40.0	879.7
75,0°	12.7	9.9	8.3	7.4	6.8	6.3	6.0	5.3	4.0	3.3	3.0	31.4	911.1
77,5°	11.2	9.4	7.1	6.1	5.5	5.0	4.1	3.5	3.0	2.6	2.6	20.4	931.5
80,0°	11.2	8.6	6.6	5.6	4.8	4.1	3.5	3.1	2.8	2.5	2.3	11.8	943.3
82,5°	11.1	8.1	6.0	5.1	4.5	4.0	3.3	3.0	2.6	2.3	2.3	6.9	950.2
85,0°	8.9	7.1	5.8	5.0	4.3	3.6	3.1	2.8	2.5	2.3	2.3	4.2	954.4
87,5°	8.6	6.5	5.5	4.6	4.0	3.6	3.1	2.8	2.5	2.3	2.3	3.0	957.4
90,0°	6.1	5.6	5.0	4.5	4.0	3.5	3.0	2.8	2.3	2.3	2.3	2.3	959.7
92,5°	6.0	5.5	5.0	4.3	4.0	3.5	3.0	2.8	2.3	2.3	2.3	2.3	962.0
95,0°	6.0	5.3	5.0	4.3	4.0	3.5	3.0	2.6	2.3	2.3	2.3	2.3	964.3
97,5°	6.0	5.3	4.8	4.3	4.0	3.3	3.0	2.8	2.3	2.3	2.3	2.3	966.6
100,0°	6.0	5.5	4.8	4.3	4.0	3.6	3.0	2.8	2.5	2.3	2.3	2.2	968.8
102,5°	6.0	5.5	4.8	4.3	4.0	3.6	3.0	2.8	2.6	2.5	2.3	2.2	971.1
105,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.3	2.6	2.2	973.2
107,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.5	2.3	2.1	975.3
110,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.6	2.6	2.1	977.4
112,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	3.0	2.6	2.6	2.6	2.0	979.4

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	9.1	9.1	9.4	9.4	9.8	10.1	10.1	10.1	10.3	10.3	10.3	10.3	10.3
117,5°	8.9	9.1	9.1	9.4	9.4	9.8	9.8	9.8	9.9	10.1	9.9	9.9	9.9
120,0°	8.8	8.9	9.1	9.1	9.4	9.4	9.6	9.6	9.6	9.6	9.8	9.6	9.8
122,5°	8.6	8.8	8.8	8.9	9.1	9.1	9.1	9.3	9.3	9.3	9.3	9.3	9.4
125,0°	8.4	8.4	8.6	8.6	8.8	8.8	8.8	8.9	8.9	8.9	8.9	8.9	8.9
127,5°	8.1	8.3	8.4	8.3	8.4	8.4	8.4	8.6	8.6	8.6	8.6	8.6	8.6
130,0°	7.8	7.9	7.9	7.9	8.1	8.1	8.1	8.3	8.3	8.3	8.3	8.3	8.3
132,5°	7.3	7.4	7.6	7.6	7.6	7.8	7.6	7.8	7.9	7.9	7.9	7.9	7.9
135,0°	6.9	6.9	7.1	7.3	7.3	7.3	7.3	7.4	7.4	7.6	7.6	7.6	7.6
137,5°	6.5	6.6	6.8	6.8	6.9	6.9	6.9	7.1	7.3	7.1	7.3	7.3	7.3
140,0°	6.1	6.1	6.3	6.3	6.5	6.6	6.6	6.6	6.6	6.8	6.9	6.9	6.9
142,5°	5.8	5.8	6.0	6.0	6.1	6.3	6.3	6.3	6.3	6.5	6.6	6.6	6.6
145,0°	5.3	5.5	5.6	5.6	5.8	5.8	6.0	6.0	6.0	6.1	6.3	6.3	6.3
147,5°	5.0	5.0	5.3	5.3	5.3	5.5	5.5	5.6	5.6	5.6	5.8	6.0	6.0
150,0°	4.3	4.5	4.6	4.6	4.8	5.0	5.0	5.0	5.1	5.3	5.3	5.3	5.3
152,5°	3.6	4.0	4.0	4.0	4.0	4.3	4.3	4.3	4.3	4.3	4.6	4.6	4.6
155,0°	3.0	3.0	3.1	3.1	3.3	3.3	3.3	3.5	3.5	3.6	3.6	3.6	3.6
157,5°	2.2	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.5	2.5	2.5	2.6	2.6
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.8	1.7	1.7
162,5°	1.5	1.7	1.7	1.3	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.2	1.3	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	10.3	10.3	10.6	10.6	10.6	10.6	8.8	8.6	8.4	7.8	7.4	6.8	6.3
117,5°	10.1	10.3	10.3	10.3	10.3	10.3	8.8	8.4	8.1	7.8	7.4	6.8	6.3
120,0°	9.9	9.9	9.9	9.9	9.9	9.9	8.8	8.4	8.1	7.8	7.3	6.8	6.1
122,5°	9.4	9.6	9.4	9.4	9.4	9.6	8.4	8.3	8.1	7.6	7.1	6.8	6.1
125,0°	9.1	9.1	9.1	8.9	8.9	8.9	8.3	8.1	7.8	7.4	7.1	6.5	6.1
127,5°	8.8	8.6	8.6	8.6	8.6	8.6	7.9	7.8	7.4	7.1	6.8	6.5	6.1
130,0°	8.3	8.3	8.3	8.3	8.3	8.3	7.6	7.4	7.1	6.9	6.6	6.3	5.8
132,5°	7.9	7.9	7.9	7.9	7.9	8.3	7.3	6.9	6.8	6.6	6.3	6.0	5.5
135,0°	7.6	7.6	7.6	7.6	7.6	7.9	6.8	6.6	6.5	6.1	6.0	5.6	5.3
137,5°	7.3	7.3	7.3	7.3	7.3	7.6	6.5	6.3	6.0	5.8	5.6	5.3	5.1
140,0°	6.9	6.9	6.9	6.9	6.9	7.3	6.0	5.8	5.6	5.5	5.3	5.1	4.8
142,5°	6.6	6.6	6.6	6.6	6.6	6.6	5.6	5.5	5.3	5.1	5.0	4.8	4.5
145,0°	6.3	6.3	6.3	6.3	6.3	6.6	5.3	5.1	5.0	4.8	4.6	4.5	4.3
147,5°	6.0	6.0	6.0	6.0	6.0	6.0	5.0	4.6	4.6	4.3	4.3	4.0	4.0
150,0°	5.3	5.3	5.3	5.3	5.5	5.6	4.3	4.3	4.0	4.0	3.6	3.6	3.3
152,5°	4.6	4.6	4.6	4.6	4.6	4.6	3.6	3.6	3.3	3.3	3.0	3.0	3.0
155,0°	3.6	3.6	3.6	3.6	3.6	3.6	2.8	2.6	2.6	2.5	2.3	2.3	2.3
157,5°	2.6	2.6	2.6	2.6	2.6	2.6	2.0	2.0	2.0	2.0	2.0	2.0	1.7
160,0°	2.0	1.7	1.7	1.7	1.7	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.5
162,5°	1.5	1.3	1.3	1.3	1.3	1.7	1.7	1.7	1.5	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.9	981.3
117,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.9	983.2
120,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.8	985.0
122,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.7	986.7
125,0°	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.0	2.8	2.6	2.6	1.6	988.3
127,5°	5.5	5.0	4.6	4.3	4.0	3.6	3.3	3.0	2.8	2.6	2.6	1.5	989.8
130,0°	5.3	5.0	4.5	4.1	3.8	3.6	3.1	3.0	2.8	2.8	2.6	1.4	991.2
132,5°	5.1	4.8	4.3	4.0	3.6	3.3	3.0	3.0	2.8	2.8	2.6	1.3	992.4
135,0°	5.0	4.6	4.1	4.0	3.6	3.3	3.0	2.8	2.6	2.6	2.6	1.2	993.6
137,5°	4.6	4.3	4.0	3.6	3.5	3.3	3.0	2.8	2.6	2.6	2.6	1.1	994.7
140,0°	4.5	4.1	3.8	3.5	3.3	3.0	3.0	2.6	2.6	2.3	2.3	1.0	995.6
142,5°	4.3	4.1	3.8	3.5	3.3	3.0	2.8	2.6	2.5	2.3	2.3	0.9	996.5
145,0°	4.0	4.0	3.6	3.5	3.3	3.0	2.6	2.6	2.3	2.3	2.3	0.8	997.3
147,5°	3.8	3.6	3.5	3.3	3.0	3.0	2.6	2.3	2.3	2.0	2.0	0.7	997.9
150,0°	3.3	3.3	3.0	3.0	2.6	2.6	2.3	2.2	2.0	2.0	2.0	0.6	998.5
152,5°	2.8	2.6	2.5	2.3	2.3	2.0	2.0	2.0	1.8	1.7	1.7	0.4	999.0
155,0°	2.2	2.0	2.0	2.0	2.0	1.7	1.7	1.7	1.7	1.7	1.7	0.3	999.3
157,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.7	1.3	1.3	0.2	999.5
160,0°	1.5	1.7	1.5	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.6
162,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.8
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
167,5°	1.3	1.3	1.7	1.7	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EY14HP00022 + 5XA54000XBL EAN: 4069025197108 + 4050737971421	LP number 59425_83
---------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4770	33.5	36.0	34.8
95	241	252	4526	31.3	33.5	32.4
90	229	250	4301	29.3	31.3	30.3
85	216	248	4056	27.3	29.2	28.2
80	203	246	3812	25.4	27.1	26.2
75	190	243	3568	23.4	25.0	24.2
70	178	241	3343	21.7	23.2	22.4
65	165	238	3099	20.0	21.3	20.6
60	152	235	2854	18.2	19.4	18.8
55	140	232	2629	16.7	17.7	17.2
50	127	229	2385	15.0	16.0	15.5
45	114	225	2141	13.4	14.3	13.8
40	102	221	1916	12.0	12.7	12.4
35	89	216	1671	10.4	11.1	10.8
30	76	210	1427	8.9	9.4	9.2
25	63	203	1183	7.5	7.9	7.7
20	51	195	958	6.2	6.6	6.4
15	38	184	714	4.8	5.0	4.9
11	28	173	526	3.8	3.9	3.8