
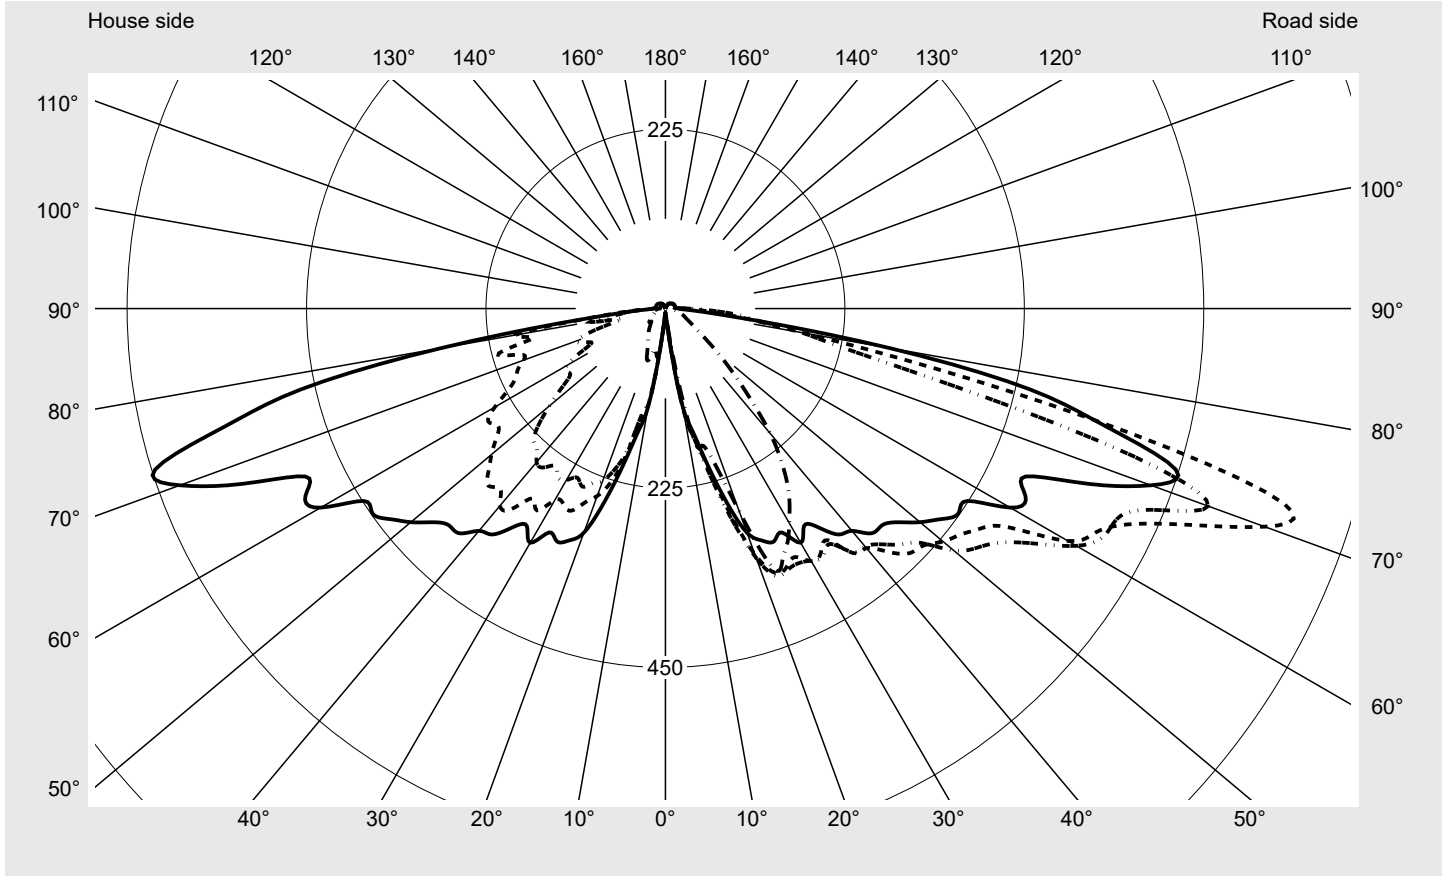


# Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number: 5XA5575AF14HP00022</b> <b>EAN: 4058352781654</b>	<b>LP number</b> <b>59429_127</b>
	<b>Version</b> post-top- or mounting to wall arm <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 2200 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 4000 lm Power consumption = 33.6 W Luminous efficacy = 119 lm/W	<b>serial documentation</b> <b>18.03.2024</b>



**Luminous intensity in cd/klm** C180-0 C190-10 C195-15 C270-90 **Imax: 813 cd/klm**



**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	94.5%
Eta 90° - 180°	5.5%

**Luminous intensity class acc. to EN13201-2**

Class:	---
Imax 70°	799.6
Imax 80°	285.8
Imax 90°	34.0
Imax >90°	17.5
Imax >95°	12.2


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5575AF14HP00022</b> <b>EAN: 4058352781654</b>	<b>LP number</b> 59429_127
---------------------------	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 72.5°**    **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **siteco**

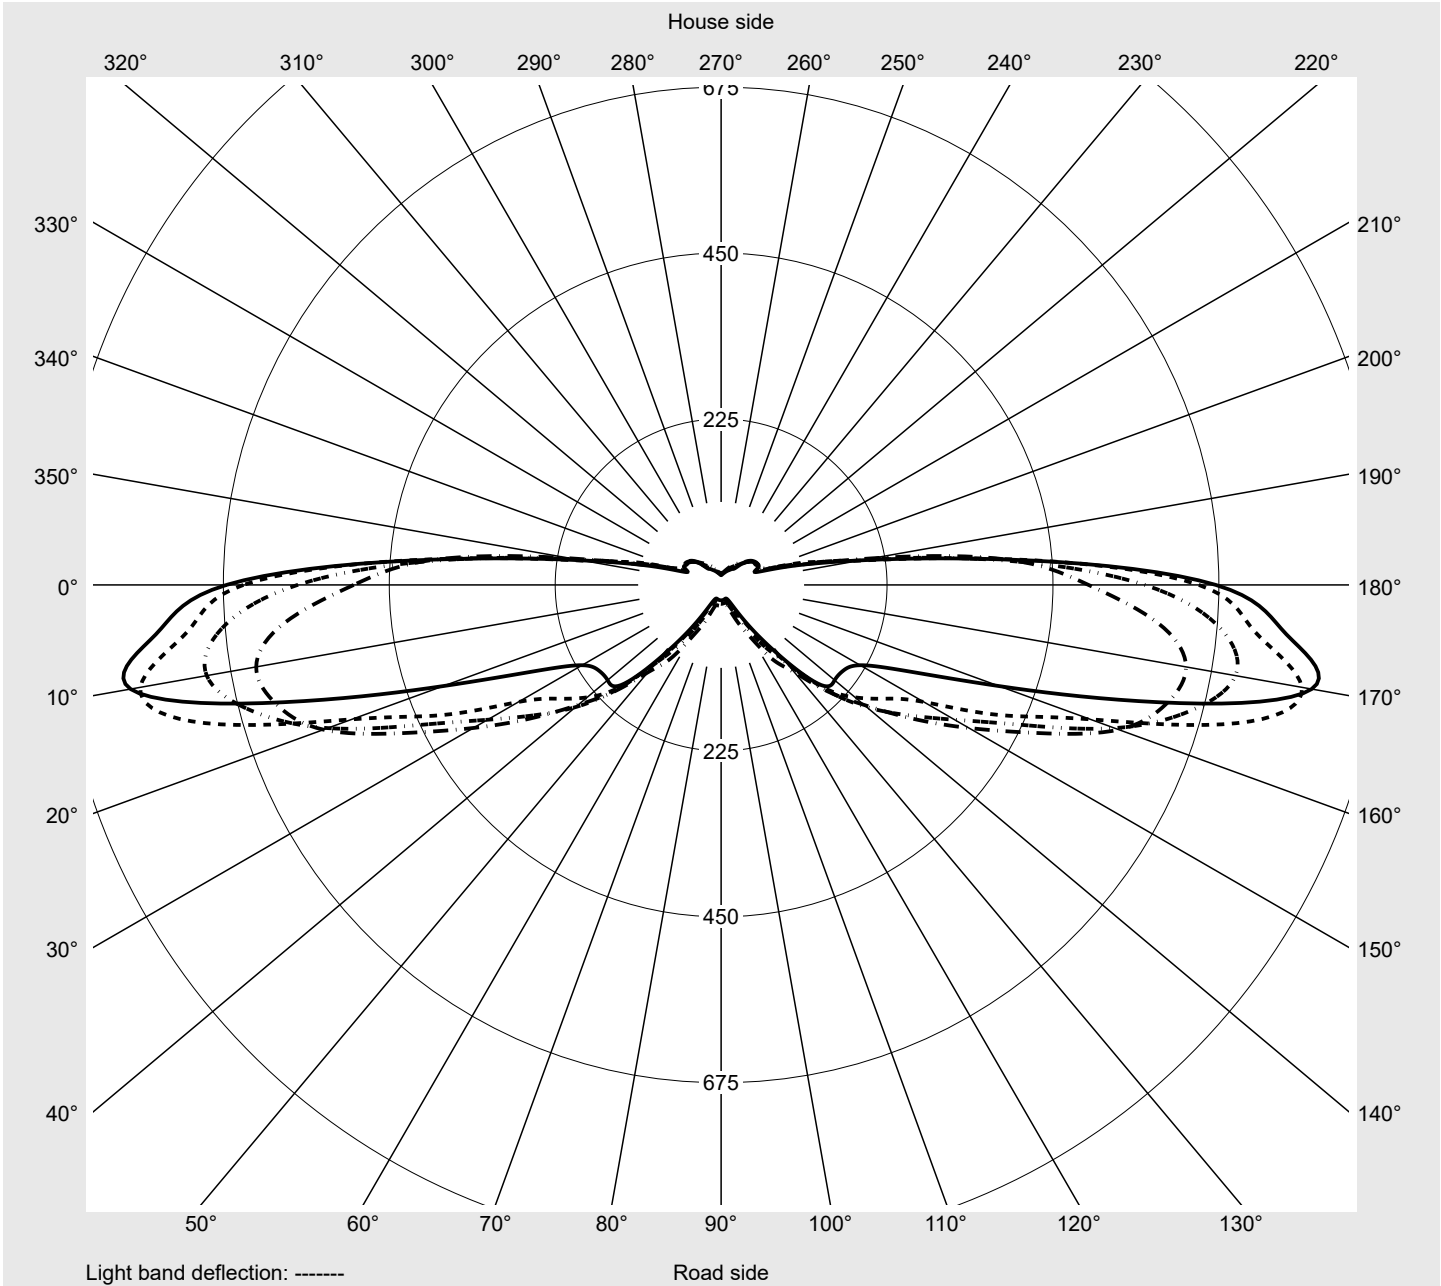

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5575AF14HP00022</b> <b>EAN: 4058352781654</b>	<b>LP number</b> 59429_127
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	5.9	5.8	5.9	6.0	6.0	5.9	6.1	6.1	6.2	6.2	6.3	6.5	6.7
5,0°	11.1	10.5	10.0	9.4	9.2	9.0	8.9	8.9	9.0	9.1	9.1	9.3	9.3
7,5°	51.0	46.1	42.5	39.9	38.1	36.6	35.7	34.7	34.6	34.0	33.0	32.1	31.1
10,0°	125.2	125.3	128.8	126.8	124.3	116.8	101.6	92.3	89.6	88.8	87.0	85.9	87.1
12,5°	157.8	165.8	167.3	166.7	167.7	171.0	177.7	180.6	167.5	153.4	147.6	146.2	148.0
15,0°	201.1	204.4	204.8	216.7	228.3	228.4	230.0	230.6	242.1	252.3	252.3	242.0	227.8
17,5°	253.8	262.8	270.0	277.9	277.4	289.2	300.2	308.8	306.4	302.3	293.9	287.1	279.8
20,0°	299.1	311.6	328.2	332.9	334.9	330.4	321.5	311.9	309.5	316.8	321.9	316.6	305.0
22,5°	314.6	335.2	358.6	363.0	364.4	364.6	357.3	348.6	332.9	325.4	318.8	322.5	316.2
25,0°	322.1	337.7	358.4	361.9	366.3	367.9	366.4	359.8	344.9	332.8	326.9	317.9	310.3
27,5°	316.5	339.4	351.3	360.2	372.3	372.7	367.6	361.0	352.0	328.9	314.9	310.5	299.8
30,0°	339.1	357.1	365.7	365.0	366.6	371.8	373.7	357.0	339.3	327.0	307.3	300.0	286.5
32,5°	323.4	344.3	362.8	367.9	369.8	358.4	355.5	343.1	320.0	312.0	293.7	283.0	265.5
35,0°	335.2	356.8	354.5	360.1	371.4	375.6	365.5	350.1	327.5	305.1	279.4	264.0	244.6
37,5°	357.1	373.5	386.4	384.8	370.9	357.5	361.1	342.1	320.9	297.5	266.6	246.0	224.5
40,0°	363.8	381.6	392.1	389.7	388.8	367.7	352.3	329.0	302.3	280.4	253.4	223.8	203.9
42,5°	382.3	402.3	413.8	400.9	396.3	380.6	362.2	337.7	297.9	261.8	233.4	208.6	198.8
45,0°	384.2	407.0	433.5	418.1	400.9	367.4	351.6	320.8	286.1	256.5	231.1	200.7	190.7
47,5°	396.6	411.1	439.5	435.0	431.1	383.2	358.6	315.0	276.8	245.4	210.2	189.5	178.8
50,0°	416.7	432.1	454.5	471.8	470.1	407.5	356.6	305.7	255.1	223.1	183.9	175.3	166.3
52,5°	433.9	469.5	465.8	492.6	476.3	426.2	360.0	290.1	244.5	209.3	168.8	162.7	151.9
55,0°	448.3	486.3	481.4	511.7	475.9	443.5	374.1	299.6	239.6	193.1	160.7	161.9	140.5
57,5°	448.9	502.6	510.5	548.2	520.2	455.0	366.9	298.1	237.0	192.7	165.4	157.8	122.0
60,0°	499.1	547.3	582.8	595.0	567.4	479.6	375.6	313.0	253.5	197.7	167.4	150.2	117.9
62,5°	508.9	568.6	608.1	619.3	601.4	492.2	387.9	321.1	256.2	206.2	169.0	135.3	108.2
65,0°	498.2	594.8	640.2	624.5	573.8	475.4	388.0	315.8	253.2	203.9	154.9	124.9	85.7
67,5°	574.4	679.9	708.3	659.2	567.7	448.9	365.6	307.9	257.8	201.5	139.1	100.3	59.7
70,0°	647.9	726.4	799.6	724.2	532.9	417.7	317.4	269.0	237.3	197.6	135.3	82.2	46.1
72,5°	670.9	769.5	813.2	614.7	401.1	275.6	217.8	202.4	201.0	192.1	129.6	74.0	37.0
75,0°	572.7	659.7	603.1	372.2	231.6	175.1	154.5	139.0	140.7	142.2	94.4	54.8	27.2
77,5°	468.0	444.5	344.0	230.3	173.5	141.8	125.2	119.0	101.9	81.7	52.9	33.2	21.1
80,0°	285.8	235.7	176.8	173.6	137.8	94.2	90.9	98.1	70.3	55.6	37.7	24.2	16.4
82,5°	113.1	97.9	110.0	117.4	95.8	70.1	77.6	67.0	40.5	31.9	25.2	18.8	14.1
85,0°	47.4	54.3	66.4	91.3	81.1	55.8	51.6	40.8	26.6	23.1	19.1	14.7	12.3
87,5°	21.5	29.3	43.7	58.6	44.3	33.5	28.3	20.7	16.9	16.4	15.6	12.1	11.3
90,0°	16.4	20.8	29.3	34.0	25.5	18.7	17.7	13.4	12.6	12.9	12.4	11.1	10.8
92,5°	13.1	13.4	17.5	14.9	13.6	12.7	12.0	11.7	11.4	11.1	10.9	10.7	10.4
95,0°	12.3	12.4	12.4	12.3	12.2	12.0	11.7	11.4	11.2	11.0	10.8	10.5	10.4
97,5°	12.2	12.2	12.2	12.2	12.1	11.8	11.6	11.4	11.2	10.9	10.8	10.5	10.4
100,0°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.1	10.8	10.7	10.5	10.4
102,5°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.0	10.9	10.7	10.5	10.4
105,0°	12.2	12.2	12.2	12.1	12.0	11.7	11.4	11.2	11.0	10.8	10.6	10.5	10.4
107,5°	12.1	12.1	12.1	12.0	11.8	11.6	11.3	11.1	10.9	10.7	10.5	10.4	10.3
110,0°	12.0	12.0	11.9	11.9	11.7	11.5	11.3	11.0	10.8	10.6	10.5	10.4	10.3
112,5°	11.9	11.8	11.9	11.7	11.6	11.4	11.1	10.9	10.7	10.5	10.4	10.3	10.2

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5575AF14HP00022</b> <b>EAN: 4058352781654</b>	<b>LP number</b> 59429_127
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	6.8	7.0	7.1	7.3	7.3	7.4	5.9	5.9	6.0	6.1	6.1	6.1	6.2
5,0°	9.4	9.5	9.7	9.8	9.8	9.8	11.7	12.5	13.8	15.5	17.4	18.5	19.5
7,5°	30.0	28.4	27.6	27.4	26.9	26.6	53.0	53.4	52.5	51.4	50.3	50.6	51.3
10,0°	88.0	90.4	91.0	91.9	92.3	91.4	120.8	120.8	116.9	104.2	91.8	78.5	72.5
12,5°	153.1	158.8	164.5	170.5	172.5	172.3	146.0	139.3	134.8	134.5	129.3	125.1	117.5
15,0°	211.6	200.5	189.3	183.1	178.5	177.9	196.5	190.6	182.9	173.5	168.2	149.9	132.7
17,5°	269.1	253.6	232.4	214.6	204.0	201.5	238.8	229.0	211.4	186.1	168.3	150.0	130.3
20,0°	301.9	298.2	289.8	280.8	274.3	270.1	269.6	250.1	229.7	204.9	176.3	152.9	134.4
22,5°	317.4	318.6	316.8	324.3	342.3	352.1	289.5	263.0	236.5	208.1	175.0	145.3	128.4
25,0°	316.0	319.1	322.1	336.7	346.6	347.4	302.2	279.7	246.3	211.8	174.9	139.4	120.9
27,5°	301.6	301.1	306.9	322.1	329.5	331.3	299.7	276.8	239.1	196.9	169.4	144.6	112.7
30,0°	282.6	280.2	289.2	303.6	307.7	310.4	307.9	277.2	248.6	204.2	170.2	137.6	96.5
32,5°	259.6	260.0	271.1	283.7	286.3	289.7	322.2	300.0	250.5	202.2	164.6	116.8	85.2
35,0°	237.3	241.4	253.3	262.2	264.2	265.8	315.1	290.5	240.9	200.6	160.5	108.3	84.8
37,5°	216.8	222.2	232.2	236.8	236.6	236.7	340.4	316.9	251.2	212.6	149.5	103.0	76.2
40,0°	198.5	203.8	207.7	208.8	205.4	204.6	351.4	322.5	251.3	201.1	135.1	98.7	62.3
42,5°	188.3	182.1	180.8	176.1	168.7	166.1	357.5	306.5	238.4	176.6	123.5	83.0	60.4
45,0°	179.7	164.3	154.8	145.8	136.4	133.1	370.3	314.1	233.4	148.8	105.1	68.9	62.4
47,5°	160.6	141.3	129.1	118.0	110.3	106.6	373.9	300.6	215.6	123.6	82.7	64.1	59.9
50,0°	144.8	124.3	109.5	96.5	87.8	84.2	373.2	284.7	190.0	107.7	66.5	59.7	56.2
52,5°	126.5	104.1	92.6	78.0	68.8	65.8	369.4	267.3	164.9	93.5	62.4	56.7	54.2
55,0°	111.3	85.8	74.1	60.3	54.1	52.5	373.7	256.3	145.8	82.8	62.7	56.7	54.2
57,5°	93.5	75.6	62.0	47.5	43.7	43.4	379.7	263.4	146.9	82.8	62.7	55.2	54.5
60,0°	86.0	60.1	46.8	37.9	37.1	37.0	385.2	246.9	142.8	83.5	61.6	58.2	56.8
62,5°	82.5	48.9	35.8	32.3	32.1	32.1	389.4	223.1	121.9	77.7	56.3	56.6	54.8
65,0°	59.7	38.9	29.0	28.1	28.3	28.5	391.4	207.5	102.2	66.3	55.9	56.8	55.3
67,5°	40.4	28.9	25.1	25.0	25.4	25.7	382.8	200.4	111.7	62.2	54.7	56.8	55.0
70,0°	30.9	24.2	22.2	22.4	23.1	23.2	397.6	189.6	117.8	59.5	55.3	57.1	53.1
72,5°	22.9	19.6	19.7	20.3	20.7	20.8	393.3	191.9	99.3	50.9	55.2	54.4	53.5
75,0°	17.7	17.6	17.9	18.3	18.3	18.3	419.2	216.1	66.2	48.4	52.3	52.6	49.4
77,5°	16.4	16.1	15.9	15.8	15.3	14.8	325.7	169.7	59.3	43.1	47.7	45.8	42.1
80,0°	14.6	14.4	14.2	13.6	13.1	12.8	240.2	191.3	95.9	40.4	43.0	40.2	35.1
82,5°	13.0	12.9	12.4	12.0	11.7	11.7	172.7	107.2	62.9	34.6	35.4	32.5	28.7
85,0°	11.9	11.7	11.3	11.0	11.0	11.0	56.8	56.8	47.3	32.2	28.3	26.8	25.0
87,5°	10.8	10.8	10.6	10.4	10.3	10.2	16.4	24.5	23.0	22.6	22.7	22.9	22.7
90,0°	10.5	10.4	10.2	10.2	9.9	9.8	14.0	14.1	15.8	17.5	19.3	19.3	18.8
92,5°	10.3	10.1	10.0	9.9	9.8	9.8	12.5	12.5	13.5	14.2	14.3	13.4	12.3
95,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
97,5°	10.3	10.2	10.1	10.0	10.0	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
100,0°	10.4	10.2	10.2	10.2	10.1	10.1	12.2	12.0	11.8	11.6	11.4	11.1	10.8
102,5°	10.3	10.2	10.1	10.1	10.1	10.0	12.2	12.0	11.9	11.6	11.4	11.1	10.8
105,0°	10.2	10.2	10.1	10.1	10.0	9.9	12.1	12.0	11.8	11.6	11.4	11.1	10.8
107,5°	10.2	10.1	10.1	10.1	9.9	9.9	12.0	11.9	11.7	11.6	11.3	11.0	10.8
110,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.0	11.8	11.7	11.5	11.3	11.0	10.7
112,5°	10.1	10.0	9.9	9.9	9.8	9.9	11.8	11.8	11.6	11.5	11.2	11.0	10.6

## Photometric test report

Family <b>DL 11 iQ</b>	Order number: <b>5XA5575AF14HP00022</b> EAN: <b>4058352781654</b>	LP number <b>59429_127</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	0.0	0.0
2,5°	6.4	6.6	6.9	7.4	8.2	8.4	8.2	8.2	8.1	8.1	8.1	0.1	0.1
5,0°	20.5	21.9	22.1	22.1	21.8	21.5	21.2	21.1	21.4	21.7	21.6	0.3	0.4
7,5°	54.1	56.6	54.7	57.0	56.7	52.2	50.1	48.8	50.1	52.2	53.7	1.6	2.0
10,0°	67.9	65.0	64.1	63.9	63.1	60.4	56.1	54.6	56.8	60.3	61.2	4.3	6.3
12,5°	105.0	94.3	82.8	74.6	68.5	61.4	53.4	50.7	51.6	53.4	53.6	7.7	14.0
15,0°	117.7	106.0	96.2	86.9	80.4	70.8	61.5	55.1	52.8	52.7	53.1	11.9	25.8
17,5°	116.0	102.5	92.2	81.9	73.7	69.1	65.4	64.2	62.6	64.0	65.7	16.3	42.1
20,0°	112.3	98.0	86.1	75.6	68.2	63.7	62.0	63.9	62.1	64.8	68.0	20.7	62.8
22,5°	109.1	87.0	73.8	65.2	62.2	59.6	57.2	58.5	55.5	57.5	59.7	24.4	87.2
25,0°	95.8	75.0	64.1	59.0	56.2	55.4	51.6	52.5	50.0	51.2	52.9	27.0	114.2
27,5°	84.0	64.4	58.1	55.3	52.2	51.3	46.6	47.3	44.7	45.9	47.2	28.8	143.0
30,0°	73.6	60.7	55.1	52.7	50.0	47.6	43.0	43.7	41.5	42.2	43.6	30.6	173.6
32,5°	69.6	57.8	52.6	50.6	48.1	44.6	40.4	40.5	38.5	38.9	39.9	31.7	205.3
35,0°	62.5	53.2	51.1	49.4	46.4	42.5	38.3	37.9	35.9	36.0	36.6	33.0	238.3
37,5°	56.9	53.0	50.0	48.5	45.6	41.5	37.0	35.5	33.3	33.5	34.0	34.6	272.9
40,0°	55.3	53.0	50.4	47.5	43.1	38.8	34.7	32.8	30.8	30.7	30.8	35.3	308.2
42,5°	55.4	52.7	50.5	47.2	43.6	38.6	33.3	30.2	28.4	28.2	28.0	36.1	344.3
45,0°	57.1	53.0	50.5	47.4	42.9	37.8	32.8	29.1	26.4	26.2	25.9	36.7	381.0
47,5°	55.9	54.7	53.1	48.6	43.2	37.3	31.9	27.8	25.9	24.6	24.1	37.2	418.2
50,0°	54.3	53.0	52.0	48.5	42.9	36.7	31.1	26.8	24.5	24.8	26.3	37.7	455.9
52,5°	53.4	51.9	50.3	45.7	40.3	34.7	30.0	26.3	25.0	24.6	24.3	38.2	494.1
55,0°	52.7	50.6	48.6	43.5	39.1	34.8	30.2	25.1	21.8	21.2	20.6	38.9	533.0
57,5°	53.3	51.2	49.7	43.7	36.9	31.3	26.6	22.6	20.1	19.5	19.0	40.3	573.3
60,0°	53.3	48.2	45.6	40.4	34.8	29.8	25.5	21.8	19.4	18.8	18.1	43.0	616.3
62,5°	51.9	45.6	42.0	37.7	33.0	28.2	24.4	21.1	18.7	17.8	17.2	44.2	660.4
65,0°	51.0	43.7	38.4	34.5	30.4	26.4	22.6	19.7	17.6	16.6	16.1	44.0	704.4
67,5°	49.7	42.3	35.2	31.2	27.7	24.4	21.3	18.8	16.9	15.8	15.1	45.3	749.8
70,0°	48.6	41.0	32.4	28.6	25.5	22.8	20.2	17.9	16.2	15.0	14.1	46.3	796.1
72,5°	48.5	41.5	29.9	26.3	23.6	21.3	19.2	17.1	15.5	14.0	13.2	42.7	838.7
75,0°	44.3	38.7	27.8	24.7	22.0	20.1	19.4	18.0	16.5	15.0	14.1	34.0	872.8
77,5°	37.7	31.2	27.1	24.7	22.3	20.1	19.8	19.2	18.7	17.1	16.2	25.3	898.1
80,0°	28.5	26.9	24.9	22.8	20.8	18.9	18.2	17.7	17.8	16.4	15.8	18.6	916.7
82,5°	25.3	24.8	21.9	20.2	18.9	17.4	16.1	14.8	14.4	12.9	12.1	12.2	928.8
85,0°	23.7	22.6	18.5	16.8	15.9	15.1	14.0	12.8	12.2	11.4	10.8	8.3	937.1
87,5°	22.5	19.6	15.7	14.5	13.8	13.1	12.3	11.5	11.0	10.1	9.5	5.4	942.5
90,0°	18.9	15.3	13.2	12.3	11.4	10.8	10.4	10.0	9.6	8.3	7.5	4.1	946.6
92,5°	11.4	10.8	10.3	10.0	9.5	9.2	8.9	8.6	8.3	7.3	6.5	3.1	949.7
95,0°	10.4	10.2	9.8	9.6	9.2	9.0	8.7	8.5	8.1	7.2	6.4	2.9	952.6
97,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.6	8.2	7.2	6.4	2.9	955.5
100,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.2	6.4	2.9	958.3
102,5°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.3	6.6	2.8	961.1
105,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.8	8.6	8.3	7.3	6.7	2.8	963.9
107,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.5	8.2	7.2	6.6	2.7	966.7
110,0°	10.4	10.1	9.8	9.5	9.2	9.0	8.7	8.4	8.2	7.2	6.7	2.7	969.4
112,5°	10.3	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.0	7.2	6.7	2.6	972.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5575AF14HP00022</b> <b>EAN: 4058352781654</b>	<b>LP number</b> 59429_127
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	11.8	11.8	11.7	11.6	11.5	11.3	11.0	10.8	10.6	10.4	10.2	10.2	10.1
117,5°	11.6	11.6	11.6	11.4	11.3	11.1	10.8	10.6	10.5	10.3	10.2	10.0	9.9
120,0°	11.4	11.3	11.3	11.2	11.1	10.9	10.7	10.5	10.3	10.2	10.0	9.9	9.8
122,5°	11.1	11.0	11.0	10.9	10.8	10.6	10.4	10.3	10.1	10.0	9.8	9.8	9.6
125,0°	10.7	10.8	10.7	10.6	10.5	10.3	10.2	10.0	9.9	9.8	9.6	9.5	9.4
127,5°	10.4	10.4	10.4	10.3	10.2	10.1	9.9	9.8	9.7	9.5	9.4	9.3	9.2
130,0°	10.0	10.0	9.9	9.9	9.8	9.8	9.6	9.5	9.4	9.3	9.2	9.1	9.1
132,5°	9.6	9.6	9.6	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.9	8.9	8.8
135,0°	9.1	9.1	9.1	9.1	9.1	9.0	8.9	8.9	8.8	8.7	8.6	8.6	8.6
137,5°	8.6	8.6	8.7	8.7	8.7	8.6	8.6	8.6	8.6	8.4	8.4	8.4	8.3
140,0°	8.2	8.3	8.3	8.3	8.4	8.3	8.2	8.2	8.2	8.2	8.1	8.1	8.1
142,5°	7.8	7.9	8.0	8.1	8.1	8.0	8.0	7.9	7.9	7.9	7.9	7.9	7.8
145,0°	7.5	7.5	7.5	7.6	7.6	7.7	7.7	7.7	7.7	7.7	7.7	7.6	7.5
147,5°	6.9	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.3	7.3	7.2	7.2	7.2
150,0°	6.3	6.3	6.4	6.4	6.5	6.6	6.6	6.6	6.6	6.6	6.6	6.7	6.7
152,5°	5.4	5.4	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.8	5.8
155,0°	4.2	4.3	4.4	4.5	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.7	4.7
157,5°	3.2	3.2	3.3	3.3	3.3	3.3	3.4	3.5	3.5	3.5	3.5	3.5	3.6
160,0°	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.4	2.4	2.4	2.3	2.4	2.4
162,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	2.0	2.0	2.1
165,0°	1.6	1.6	1.6	1.7	1.7	1.8	1.9	1.9	1.9	1.9	1.9	1.9	1.9
167,5°	1.5	1.5	1.5	1.5	1.6	1.7	1.7	1.7	1.7	1.9	1.9	2.0	1.9
170,0°	1.4	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.5
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family DL 11 iQ	Order number: 5XA5575AF14HP00022 EAN: 4058352781654	LP number 59429_127
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	10.0	9.9	9.8	9.8	9.8	9.8	11.7	11.7	11.5	11.4	11.2	11.0	10.6
117,5°	9.9	9.8	9.8	9.8	9.6	9.6	11.5	11.5	11.4	11.2	11.0	10.8	10.5
120,0°	9.8	9.7	9.6	9.6	9.6	9.6	11.3	11.3	11.2	11.0	10.8	10.6	10.3
122,5°	9.6	9.4	9.4	9.4	9.4	9.4	11.0	11.0	10.8	10.7	10.5	10.3	10.1
125,0°	9.4	9.3	9.2	9.2	9.2	9.2	10.6	10.6	10.5	10.4	10.2	10.0	9.8
127,5°	9.2	9.1	9.1	9.1	9.1	9.1	10.3	10.3	10.2	10.1	9.9	9.8	9.5
130,0°	9.0	8.9	8.9	8.9	8.8	8.7	9.9	9.9	9.8	9.6	9.5	9.4	9.2
132,5°	8.7	8.7	8.6	8.6	8.6	8.6	9.5	9.5	9.3	9.2	9.1	9.0	8.8
135,0°	8.5	8.4	8.4	8.4	8.4	8.4	9.0	9.0	8.8	8.7	8.6	8.4	8.3
137,5°	8.3	8.2	8.2	8.2	8.2	8.1	8.5	8.4	8.4	8.3	8.1	8.1	7.9
140,0°	8.1	7.9	7.9	7.9	7.9	7.9	8.1	8.1	8.0	7.9	7.8	7.6	7.5
142,5°	7.8	7.7	7.7	7.7	7.7	7.7	7.8	7.7	7.6	7.5	7.4	7.3	7.2
145,0°	7.6	7.5	7.5	7.5	7.5	7.5	7.4	7.3	7.2	7.1	7.1	6.9	6.9
147,5°	7.2	7.2	7.2	7.2	7.2	7.2	6.9	6.8	6.7	6.6	6.6	6.4	6.4
150,0°	6.7	6.7	6.7	6.7	6.7	6.7	6.1	6.0	6.0	5.9	5.7	5.7	5.6
152,5°	5.8	5.8	5.8	5.8	5.8	5.8	5.3	5.2	5.1	5.0	4.9	4.8	4.7
155,0°	4.8	4.8	4.8	4.8	4.8	4.7	4.2	4.1	4.0	4.0	3.9	3.8	3.7
157,5°	3.5	3.5	3.5	3.5	3.4	3.4	3.1	3.0	3.0	3.0	2.9	2.8	2.8
160,0°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1
162,5°	2.1	2.1	2.1	2.1	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8
165,0°	1.9	1.9	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.7	1.7	1.7	1.7
167,5°	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.5	1.5	1.5	1.5	1.5	1.5
170,0°	1.5	1.4	1.5	1.5	1.5	1.5	1.3	1.4	1.4	1.4	1.3	1.3	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>DL 11 iQ</b>	Order number: <b>5XA5575AF14HP00022</b> EAN: <b>4058352781654</b>	LP number <b>59429_127</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	10.3	10.0	9.7	9.5	9.2	8.9	8.6	8.3	8.0	7.2	6.7	2.5	974.5
117,5°	10.2	9.9	9.6	9.3	9.0	8.8	8.5	8.2	7.9	7.1	6.7	2.5	977.0
120,0°	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.1	7.7	7.0	6.7	2.4	979.3
122,5°	9.8	9.5	9.2	9.0	8.7	8.5	8.2	7.9	7.6	6.9	6.6	2.3	981.6
125,0°	9.5	9.2	9.0	8.8	8.5	8.3	8.0	7.7	7.5	6.8	6.5	2.1	983.7
127,5°	9.2	9.1	8.8	8.5	8.3	8.1	7.7	7.5	7.1	6.7	6.5	2.0	985.7
130,0°	9.0	8.7	8.5	8.3	8.1	7.8	7.5	7.2	6.9	6.6	6.4	1.9	987.6
132,5°	8.6	8.3	8.1	7.9	7.7	7.5	7.2	6.8	6.6	6.3	6.2	1.7	989.4
135,0°	8.1	7.8	7.7	7.5	7.3	7.2	6.9	6.5	6.3	6.1	6.0	1.6	991.0
137,5°	7.7	7.5	7.4	7.2	7.0	6.9	6.6	6.3	6.1	6.0	6.0	1.5	992.4
140,0°	7.3	7.1	7.1	6.9	6.8	6.4	6.4	6.0	5.9	5.8	5.8	1.3	993.8
142,5°	7.1	6.9	6.8	6.7	6.5	6.2	6.1	5.8	5.7	5.7	5.7	1.2	995.0
145,0°	6.7	6.6	6.5	6.4	6.3	6.2	5.9	5.6	5.6	5.6	5.7	1.1	996.1
147,5°	6.3	6.2	6.0	6.0	5.8	5.8	5.5	5.3	5.2	5.3	5.3	1.0	997.1
150,0°	5.5	5.4	5.4	5.2	5.1	5.0	4.8	4.6	4.6	4.6	4.6	0.8	997.9
152,5°	4.7	4.5	4.5	4.3	4.3	4.2	4.0	3.9	3.8	3.8	3.8	0.6	998.6
155,0°	3.6	3.6	3.5	3.4	3.3	3.3	3.3	3.1	3.1	3.1	3.0	0.5	999.0
157,5°	2.8	2.7	2.7	2.6	2.6	2.5	2.4	2.4	2.4	2.4	2.4	0.3	999.4
160,0°	2.1	2.1	2.1	2.1	1.9	1.9	1.9	1.9	1.9	1.9	1.9	0.2	999.6
162,5°	1.7	1.8	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.2	999.7
165,0°	1.7	1.7	1.6	1.5	1.5	1.6	1.5	1.5	1.5	1.6	1.5	0.1	999.8
167,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
170,0°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	1.3	1.4	1.3	1.4	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

Family DL 11 iQ	Order number: 5XA5575AF14HP00022 EAN: 4058352781654	LP number 59429_127
--------------------	--	------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4000	33.6	35.9	34.8
95	241	252	3795	31.3	33.5	32.4
90	229	250	3606	29.4	31.4	30.4
85	216	248	3402	27.3	29.2	28.2
80	203	246	3197	25.4	27.1	26.2
75	190	243	2992	23.5	25.1	24.3
70	178	241	2803	21.9	23.3	22.6
65	165	238	2598	20.1	21.4	20.8
60	152	235	2394	18.4	19.5	19.0
55	140	232	2205	16.8	17.9	17.4
50	127	229	2000	15.2	16.2	15.7
45	114	225	1795	13.6	14.5	14.0
40	102	221	1606	12.2	13.0	12.6
35	89	216	1402	10.7	11.3	11.0
30	76	210	1197	9.2	9.7	9.4
25	63	203	992	7.8	8.2	8.0
20	51	195	803	6.6	6.9	6.8
15	38	184	598	5.2	5.4	5.3
11	28	173	441	4.1	4.3	4.2