


# Photometric test report

<b>Family</b> <b>Streetlight 11 micro LED</b>	<b>Order number: 5XC1AC1Y08CE</b> <b>EAN: 4069025078612</b>	<b>LP number</b> <b>58065_268</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 2200 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Setting</b> individual position <b>Rated values</b> Net luminous flux = 1600 lm Power consumption = 14.0 W Luminous efficacy = 114.3 lm/W	<b>serial documentation</b> <b>24.06.2024</b>





**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 699 cd/klm**

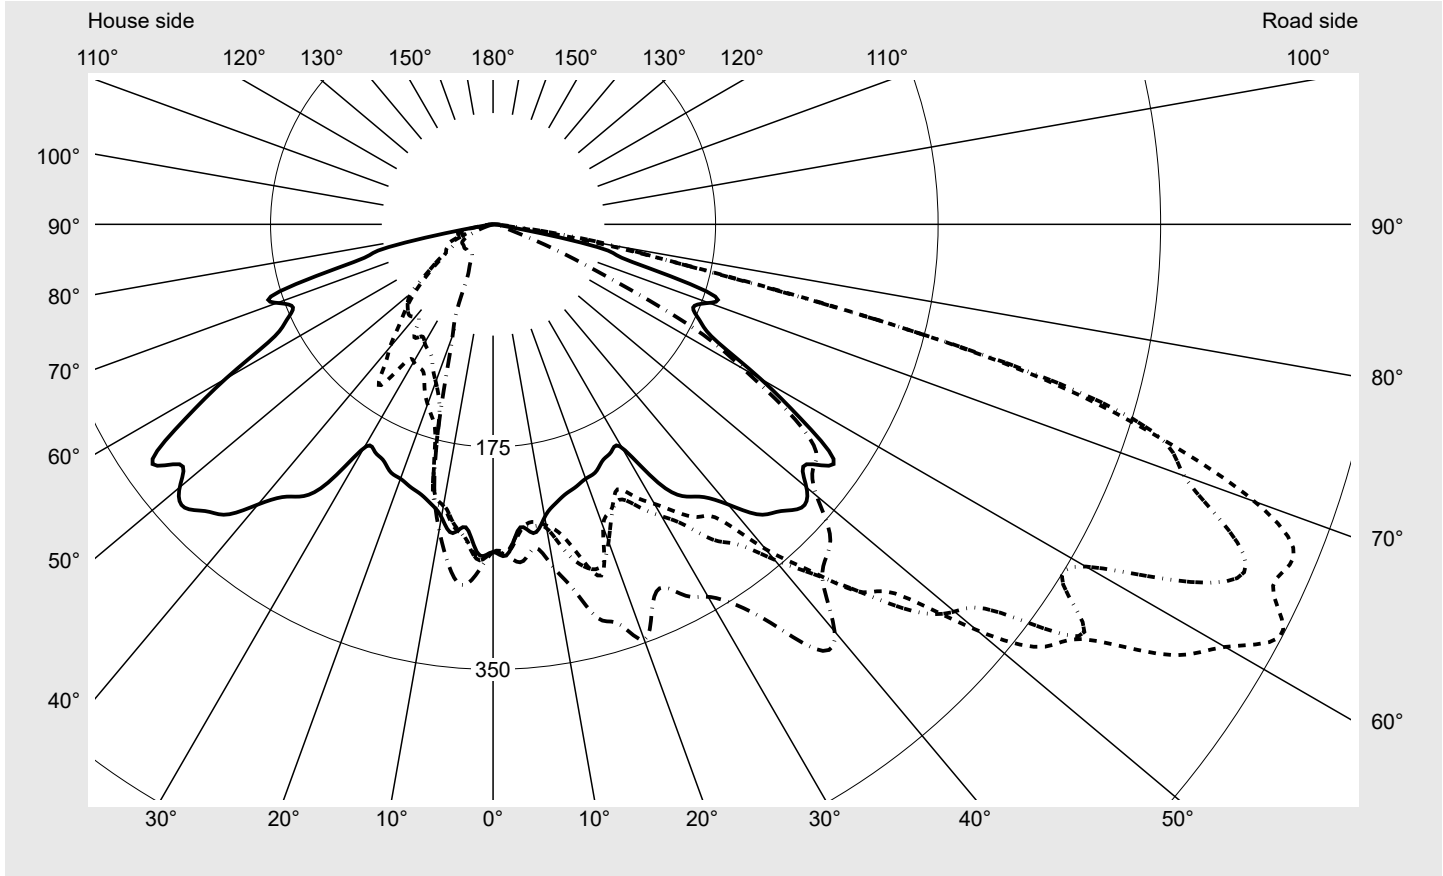

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	637.5
Imax 80°	98.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1AC1Y08CE</b> <b>EAN: 4069025078612</b>	<b>LP number</b> 58065_268
---	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**      **siteco**

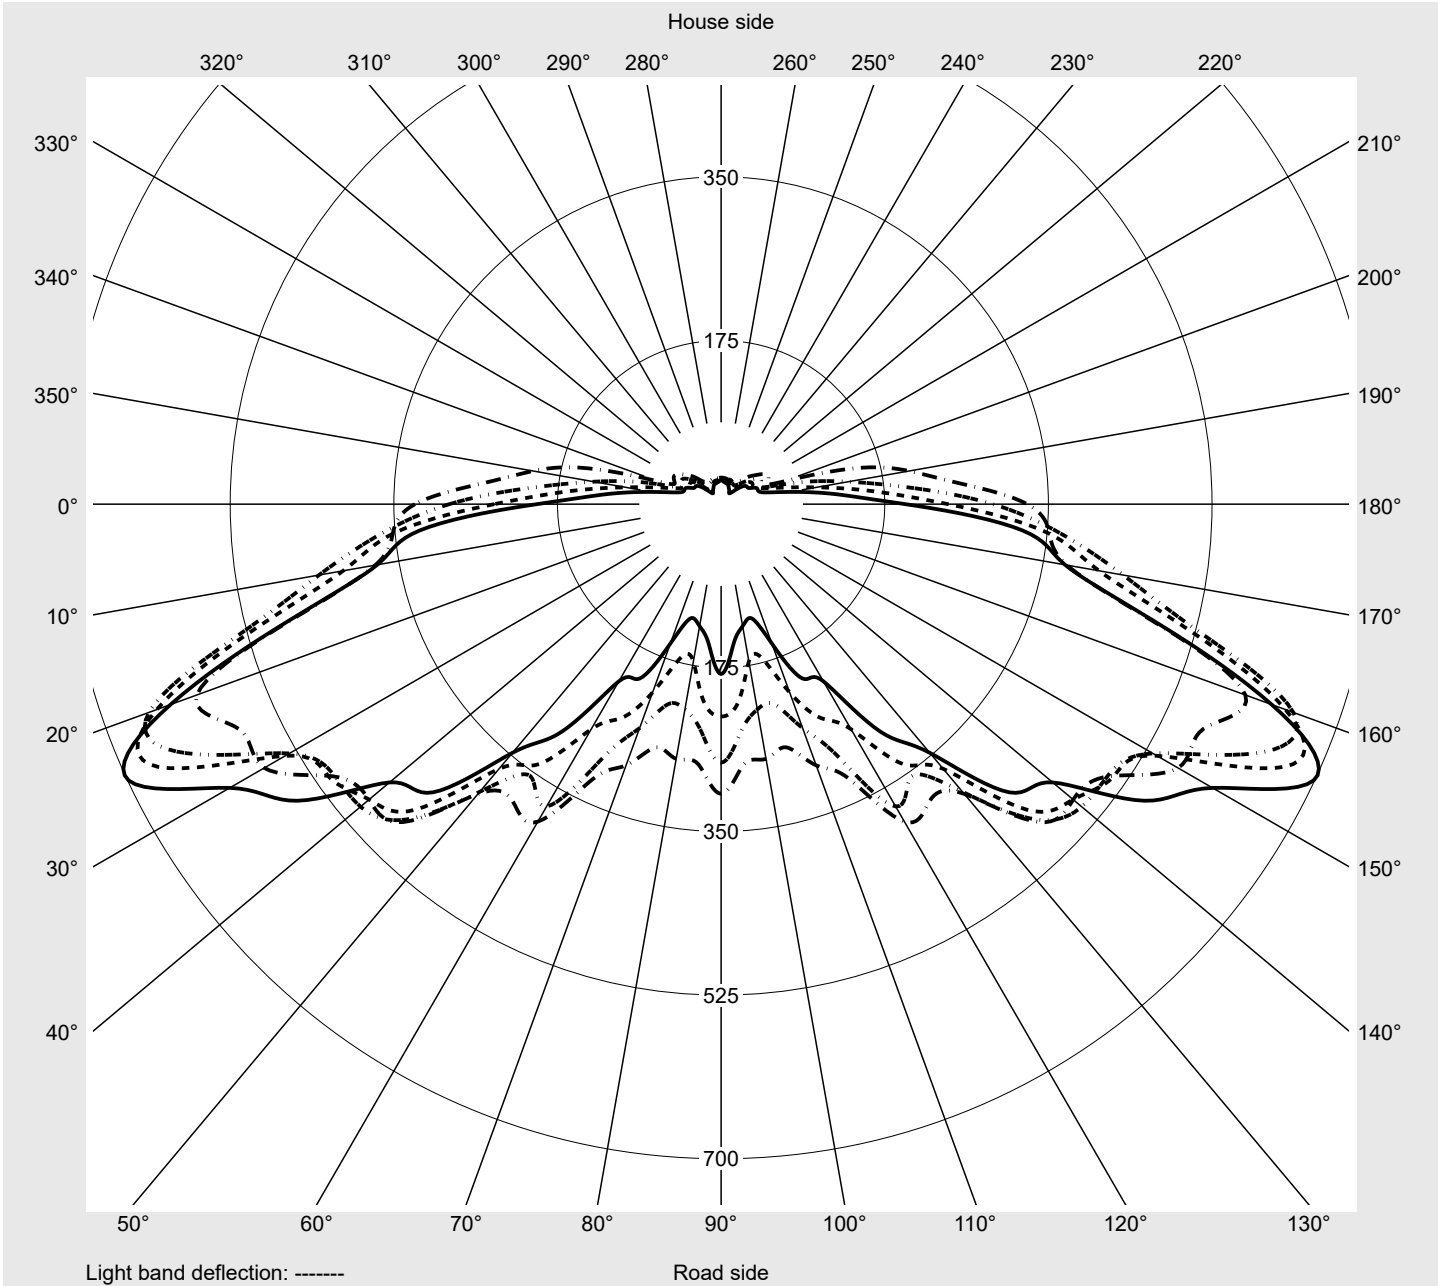

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1AC1Y08CE</b> <b>EAN: 4069025078612</b>	<b>LP number</b> <b>58065_268</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	259.9	259.7	259.7	260.1	259.7	258.6	257.4	255.7	253.8	253.3	252.7	252.9	253.7
5,0°	239.6	238.9	237.5	239.1	243.2	242.7	240.8	244.6	250.6	256.3	263.1	271.3	271.3
7,5°	244.9	242.1	235.6	230.9	228.8	236.0	239.4	250.8	256.3	259.9	254.4	255.2	258.8
10,0°	233.7	243.2	241.5	238.9	240.0	240.4	242.7	243.0	250.6	255.7	265.4	267.5	278.3
12,5°	225.2	233.7	239.6	245.3	250.1	250.4	263.7	271.5	263.5	263.7	272.0	275.3	277.7
15,0°	219.7	229.0	247.6	256.3	265.0	273.9	278.9	272.2	267.7	271.1	272.8	264.7	275.6
17,5°	216.5	223.5	248.2	257.8	271.3	287.6	282.1	276.8	264.1	264.7	264.1	271.1	270.1
20,0°	212.9	224.3	235.6	241.9	249.3	252.9	265.6	273.9	277.0	265.4	250.6	254.8	274.5
22,5°	210.8	219.3	222.6	234.7	239.4	243.0	245.1	248.3	255.4	253.7	253.7	262.2	262.4
25,0°	204.6	216.7	224.8	227.7	230.5	230.3	238.7	255.2	263.5	262.2	277.0	272.4	278.5
27,5°	201.5	215.0	216.5	224.8	233.7	241.5	251.4	261.8	265.4	279.6	301.0	305.2	312.8
30,0°	203.0	214.8	220.7	231.7	244.7	253.8	265.0	270.1	283.8	299.2	324.7	337.6	348.1
32,5°	240.0	235.6	234.5	235.3	252.5	268.3	280.4	287.4	312.2	327.0	350.0	360.2	381.1
35,0°	261.0	262.6	256.5	255.9	264.3	281.0	303.1	310.9	322.3	347.3	367.4	382.6	402.5
37,5°	270.1	279.4	281.0	280.8	282.5	292.3	317.5	330.6	342.0	366.8	377.3	417.6	423.1
40,0°	287.6	289.7	295.7	308.3	316.2	333.5	344.3	342.9	362.1	396.0	398.7	425.6	460.3
42,5°	309.6	310.1	306.5	320.6	345.6	369.9	373.1	366.5	370.1	405.9	409.7	424.1	463.7
45,0°	319.1	326.6	339.9	375.4	394.1	408.9	409.3	397.9	403.0	408.5	412.3	421.8	444.0
47,5°	329.5	324.9	325.9	392.6	432.8	430.2	451.0	434.1	450.1	424.7	412.7	419.2	439.1
50,0°	321.7	337.0	337.0	403.0	489.7	496.5	473.8	484.8	475.1	452.0	430.2	413.1	420.5
52,5°	310.1	321.7	346.7	404.6	507.5	545.8	500.9	473.0	508.8	459.5	427.7	416.3	397.2
55,0°	327.4	352.3	375.6	473.9	596.6	568.9	564.2	507.3	491.6	480.8	404.6	388.3	392.0
57,5°	290.6	365.3	436.7	530.2	651.2	630.3	533.1	505.4	503.3	477.0	401.5	355.3	373.3
60,0°	242.7	350.2	410.5	516.6	642.3	664.7	538.2	510.5	491.4	462.0	369.5	339.3	277.9
62,5°	197.0	323.8	373.5	476.4	626.6	699.2	606.8	553.0	462.9	435.8	347.1	297.1	218.8
65,0°	179.5	280.2	343.1	404.0	556.8	676.6	650.6	531.2	454.6	415.7	339.3	267.7	193.9
67,5°	170.4	253.6	315.8	366.1	567.4	681.7	625.0	497.3	409.1	364.7	296.5	241.5	173.8
70,0°	180.7	254.0	305.9	356.9	500.0	637.5	578.2	458.2	366.5	303.9	243.8	186.5	151.1
72,5°	177.1	253.8	262.9	340.7	417.3	539.9	545.4	397.0	317.0	272.8	193.0	154.3	144.8
75,0°	110.7	201.4	253.0	322.9	326.5	401.9	408.9	286.5	228.6	201.1	142.4	135.5	132.5
77,5°	88.0	125.7	156.6	239.2	175.9	190.1	183.1	164.0	125.9	136.7	94.4	91.6	91.9
80,0°	24.5	28.1	39.4	78.7	68.8	80.0	96.1	98.2	94.9	89.3	52.1	31.7	29.0
82,5°	5.9	6.6	7.8	9.5	12.1	17.6	35.1	52.1	44.2	29.6	19.5	15.7	12.1
85,0°	4.2	4.4	4.7	5.5	6.8	8.0	8.7	9.7	9.9	9.1	8.5	7.6	7.2
87,5°	2.7	2.7	3.0	3.4	3.8	4.6	4.7	5.1	5.3	4.9	4.6	4.2	3.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1AC1Y08CE</b> <b>EAN: 4069025078612</b>	<b>LP number</b> <b>58065_268</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	255.2	257.3	259.0	260.5	261.0	260.5	260.5	260.9	261.4	262.0	262.8	264.3	266.5
5,0°	271.1	267.7	264.7	264.1	266.0	266.2	241.5	243.6	246.1	247.0	247.8	248.5	247.0
7,5°	257.6	258.8	261.4	260.7	257.3	256.7	241.5	238.9	239.6	239.6	239.4	237.4	234.1
10,0°	278.1	274.7	268.3	265.0	270.1	274.1	225.6	221.4	223.7	228.4	224.8	224.5	220.5
12,5°	274.9	275.1	275.6	285.7	289.5	294.6	219.9	216.9	213.3	209.1	214.4	218.6	219.3
15,0°	280.8	283.8	297.3	315.8	317.9	321.1	215.7	202.3	195.1	186.0	175.7	167.2	166.3
17,5°	291.2	299.0	298.2	315.1	329.9	329.5	198.7	186.4	181.8	175.4	159.2	142.2	130.1
20,0°	271.3	289.1	297.8	313.2	341.0	347.7	199.8	181.6	168.9	161.5	150.5	131.8	120.4
22,5°	270.5	277.2	305.4	312.6	324.4	326.8	190.3	175.9	161.0	150.7	140.7	123.4	105.2
25,0°	282.8	301.6	307.7	314.7	328.2	315.1	190.9	167.2	157.3	140.3	129.1	114.5	102.6
27,5°	315.3	328.0	341.6	331.0	327.8	329.5	184.8	171.2	157.0	141.2	126.8	110.9	93.1
30,0°	362.3	355.3	351.3	350.0	344.3	338.2	189.8	175.4	158.7	140.1	124.7	107.5	87.6
32,5°	375.7	361.3	361.5	370.6	364.6	354.5	230.1	220.3	179.5	151.7	129.1	104.5	85.1
35,0°	399.3	383.3	385.8	390.0	393.9	384.1	253.1	241.5	199.8	175.5	154.7	108.1	82.5
37,5°	425.0	417.1	400.2	406.6	416.9	422.4	261.4	243.2	194.1	165.9	140.3	96.1	84.7
40,0°	456.3	428.4	401.5	377.8	394.5	417.8	293.1	265.8	201.9	175.2	126.3	94.8	88.7
42,5°	467.3	416.5	391.7	370.2	369.9	384.5	299.0	255.9	192.0	172.1	110.9	97.3	86.6
45,0°	479.8	431.7	387.1	364.9	366.5	370.4	313.6	262.0	196.8	154.1	99.2	94.8	89.7
47,5°	461.1	403.4	368.2	367.0	372.9	359.1	308.1	244.2	191.3	127.6	88.3	91.0	93.1
50,0°	420.3	371.2	331.2	323.8	346.4	332.1	295.6	240.4	177.4	103.5	76.8	84.0	77.5
52,5°	382.0	343.3	299.5	312.4	316.4	317.0	279.1	224.8	162.7	87.2	65.0	70.1	65.2
55,0°	324.2	297.3	269.2	276.6	279.2	309.8	255.9	204.2	148.4	70.5	54.8	58.4	55.9
57,5°	299.3	254.8	221.8	222.9	244.0	276.4	202.8	138.2	92.1	55.0	45.9	49.3	47.6
60,0°	252.3	214.2	171.2	170.8	212.1	227.1	161.3	103.5	68.4	49.7	42.7	39.6	40.0
62,5°	205.7	158.5	126.4	132.5	150.5	181.6	122.8	75.3	48.5	42.1	41.1	34.5	33.2
65,0°	152.2	108.4	88.3	87.6	107.1	106.9	112.6	58.0	45.9	38.3	38.1	32.4	33.0
67,5°	140.1	83.2	53.8	49.7	68.6	59.5	108.4	56.3	45.1	35.3	36.8	32.4	24.5
70,0°	131.4	69.2	38.1	24.1	29.0	25.4	106.4	59.1	44.9	35.6	29.6	24.1	22.2
72,5°	108.6	36.0	24.5	13.6	12.5	12.1	92.3	63.5	49.3	45.9	30.9	26.5	22.6
75,0°	79.2	24.6	15.2	10.4	9.3	9.1	63.1	60.5	59.0	37.2	30.1	28.4	20.1
77,5°	30.7	16.9	10.8	8.2	7.2	7.6	72.4	53.5	51.6	29.2	26.9	24.3	17.6
80,0°	16.3	11.4	7.8	6.1	5.3	5.3	20.5	23.7	21.0	16.1	15.7	17.3	18.6
82,5°	10.0	7.4	5.5	4.2	3.6	3.4	5.5	5.5	5.7	6.1	6.8	7.4	7.6
85,0°	5.7	4.4	3.0	2.3	1.9	1.9	3.8	3.6	3.6	3.8	4.0	3.6	3.6
87,5°	2.8	2.1	1.3	0.9	0.8	0.8	2.3	2.3	2.3	2.3	2.1	2.1	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

# Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1AC1Y08CE</b> <b>EAN: 4069025078612</b>	<b>LP number</b> 58065_268
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	0.4	0.4
2,5°	268.8	270.9	274.5	277.0	277.5	276.0	273.9	274.7	275.5	274.3	273.7	3.1	3.5
5,0°	245.5	250.1	256.1	261.6	261.4	267.5	270.9	279.4	284.7	286.3	284.7	6.1	9.7
7,5°	229.8	233.2	242.3	242.1	245.1	253.5	255.9	257.4	260.5	266.2	269.6	8.9	18.5
10,0°	208.0	203.6	214.6	211.6	221.4	226.4	236.4	243.4	247.2	244.4	244.2	11.5	30.0
12,5°	218.2	195.3	193.7	187.1	184.6	196.0	205.9	219.7	225.4	218.2	213.5	14.1	44.1
15,0°	166.3	170.8	173.1	167.4	162.8	165.5	171.9	177.6	181.0	175.5	166.4	16.1	60.1
17,5°	130.1	136.5	137.8	132.1	125.5	138.0	139.5	135.7	127.4	120.4	120.2	17.5	77.7
20,0°	114.5	118.5	123.8	109.8	99.2	92.5	86.4	86.1	92.5	95.5	92.9	18.6	96.3
22,5°	98.6	102.2	108.4	91.0	83.2	76.0	72.0	70.3	67.1	66.0	76.2	19.6	115.9
25,0°	87.4	91.2	91.0	81.9	76.8	71.9	69.4	60.9	53.1	51.6	51.9	21.4	137.2
27,5°	79.8	70.7	64.8	63.9	60.3	61.2	59.7	49.3	45.7	42.8	41.3	23.6	160.9
30,0°	77.3	69.6	63.7	58.4	53.7	49.7	44.9	43.8	40.4	37.9	36.4	26.5	187.4
32,5°	73.4	67.5	62.2	54.8	46.3	41.1	38.3	36.0	34.9	33.0	31.5	30.2	217.6
35,0°	75.1	67.7	62.2	50.4	43.0	37.5	33.4	31.8	30.1	29.4	28.8	34.3	251.9
37,5°	76.4	67.1	59.0	49.3	42.7	37.2	31.5	29.4	28.2	28.4	28.1	38.0	289.8
40,0°	77.2	68.6	56.7	49.5	40.2	32.4	30.3	29.0	28.6	28.1	28.1	41.7	331.6
42,5°	79.4	66.0	57.6	47.2	39.6	33.2	29.0	29.0	28.4	28.4	29.2	44.5	376.1
45,0°	83.4	69.8	52.1	43.4	37.9	33.7	29.4	28.2	28.4	28.4	28.8	48.1	424.2
47,5°	81.1	61.8	48.2	40.0	35.6	32.8	29.4	28.2	28.4	28.2	28.8	50.5	474.7
50,0°	63.9	54.0	44.9	36.0	33.4	30.7	30.1	28.4	28.1	28.4	29.2	52.2	526.8
52,5°	56.1	48.5	38.3	32.0	29.8	30.3	29.4	28.6	28.1	29.4	28.8	52.9	579.7
55,0°	48.3	41.3	32.8	29.0	27.1	27.1	27.9	27.3	27.9	28.2	28.4	54.3	634.0
57,5°	40.2	33.0	27.3	24.5	25.0	25.8	26.4	26.7	27.9	27.7	28.4	53.7	687.7
60,0°	35.6	25.6	20.3	19.7	20.7	22.6	24.3	25.8	26.0	26.7	28.1	50.9	738.6
62,5°	29.4	21.2	15.5	14.8	17.3	19.3	22.0	22.7	23.5	24.5	25.8	48.0	786.6
65,0°	22.9	17.3	13.6	12.7	14.2	16.9	19.7	19.9	21.2	22.6	22.0	44.5	831.0
67,5°	20.5	15.5	12.5	11.2	11.9	13.6	15.2	15.5	16.3	15.9	15.5	41.4	872.4
70,0°	19.0	14.2	11.6	10.4	9.9	10.4	10.4	11.0	11.2	10.2	9.9	37.7	910.1
72,5°	16.9	12.7	9.9	8.7	8.0	8.0	7.6	7.2	7.0	4.2	3.8	33.7	943.8
75,0°	14.4	11.6	8.7	7.0	6.4	5.7	5.3	4.6	3.4	0.9	0.8	26.9	970.8
77,5°	11.6	8.5	6.8	5.7	4.7	4.4	3.4	4.0	1.9	0.8	0.4	16.9	987.6
80,0°	13.1	7.2	4.9	4.2	3.4	2.8	2.7	2.8	1.3	0.4	0.4	7.8	995.4
82,5°	6.6	4.9	3.8	3.0	2.7	1.9	1.5	1.5	0.8	0.4	0.4	2.8	998.2
85,0°	3.2	2.7	1.9	1.7	1.5	1.1	0.9	0.8	0.4	0.4	0.4	1.2	999.4
87,5°	1.7	1.5	1.3	0.9	0.9	0.8	0.8	0.4	0.4	0.4	0.4	0.7	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1AC1Y08CE</b> <b>EAN: 4069025078612</b>	<b>LP number</b> <b>58065_268</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1600	14.0	14.2	14.1
95	241	252	1518	13.3	13.5	13.4
90	229	250	1443	12.7	12.9	12.8
85	216	248	1361	12.0	12.1	12.0
80	203	246	1279	11.3	11.5	11.4
75	190	243	1197	10.6	10.7	10.6
70	178	241	1121	10.0	10.1	10.0
65	165	238	1039	9.3	9.4	9.4
60	152	235	957	8.7	8.8	8.8
55	140	232	882	8.1	8.2	8.1
50	127	229	800	7.4	7.5	7.4
45	114	225	718	6.8	6.9	6.8
40	102	221	643	6.2	6.3	6.2
35	89	216	561	5.6	5.6	5.6
30	76	210	479	4.9	4.9	4.9
25	63	203	397	4.2	4.3	4.2
20	51	195	321	3.7	3.7	3.7
15	38	184	239	2.9	2.9	2.9
10	25	169	157	2.2	2.2	2.2
9	23	166	145	2.1	2.1	2.1