
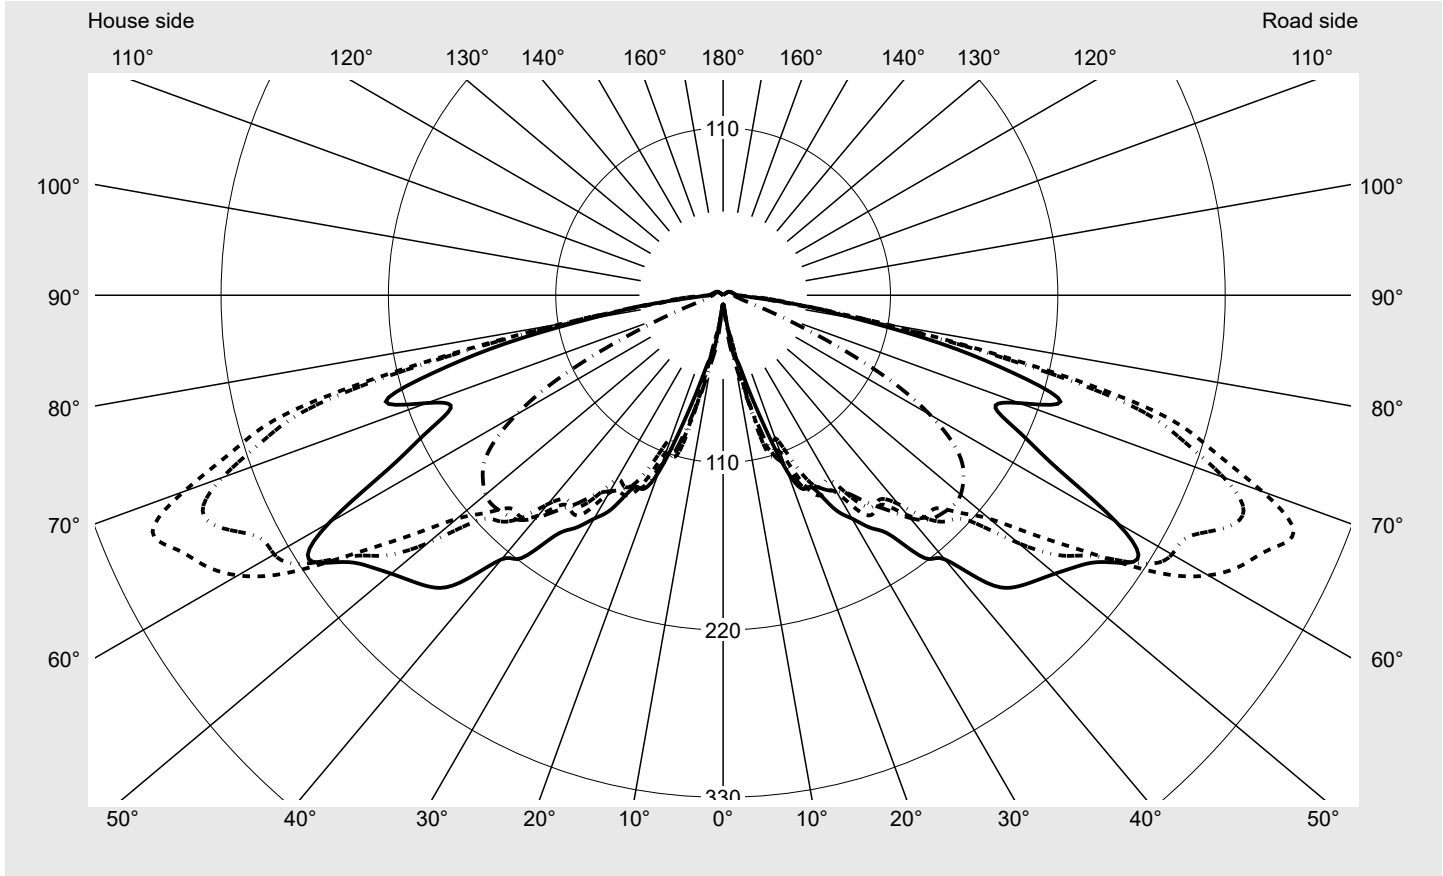


Photometric test report

Family LITEPOLE 2 	Order number: 5XA5425JF14H000022 EAN: 4058352636619	LP number 58891_27
	Version post-top- or mounting to wall arm Optic symmetric, wide distribution (PL1.2s) Cover cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 2990 lm Power consumption = 19.3 W Luminous efficacy = 154.9 lm/W	serial documentation 24.02.2023

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 406 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.7%
Eta 90° - 180°	2.3%

Luminous intensity class acc. to EN13201-2

Class:	G2
Imax 70°	377.3
Imax 80°	113.1
Imax 90°	9.2
Imax >90°	8.6
Imax >95°	7.7


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425JF14H000022 EAN: 4058352636619	LP number 58891_27
------------------------------------	--	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

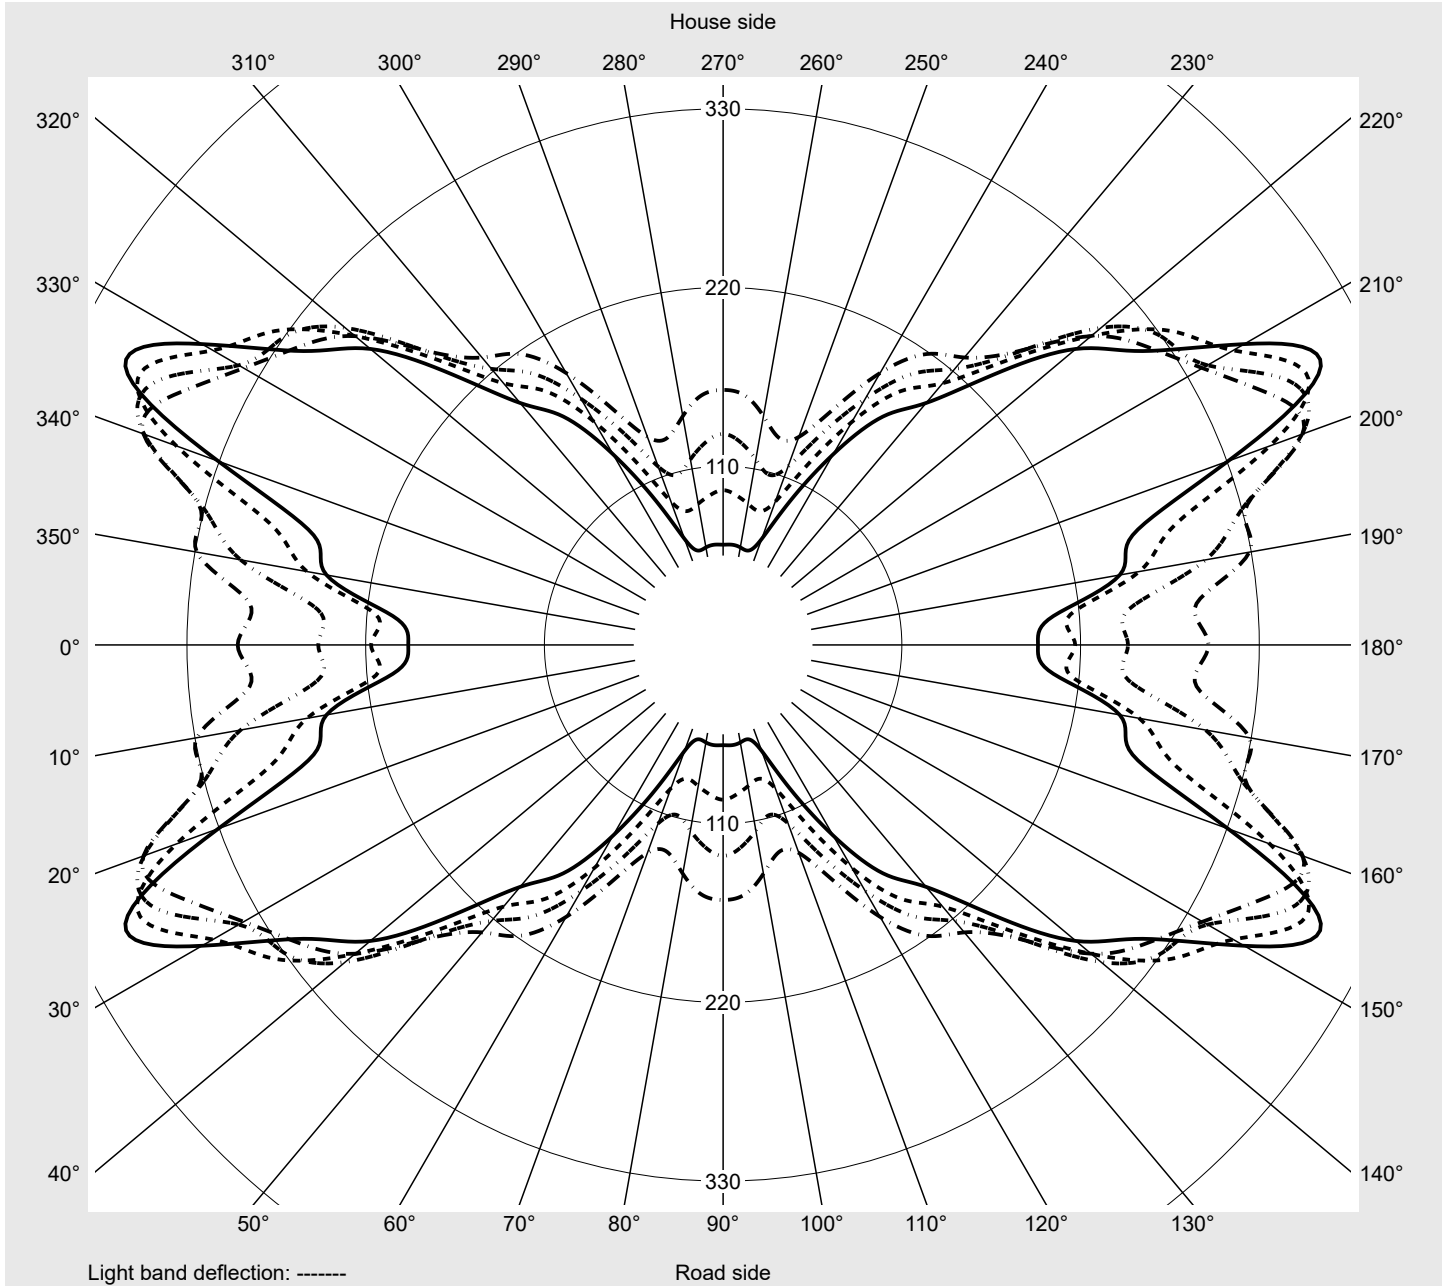

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425JF14H000022 EAN: 4058352636619	LP number 58891_27
------------------------------------	--	-------------------------------------

sitEco

Table of values for luminous intensities Maximum luminous intensity

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ										
Luminous intensity in cd/klm										
0,0°	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
2,5°	6.1	6.3	6.2	6.3	6.3	6.3	6.3	6.4	6.4	6.6
5,0°	8.2	8.5	8.5	8.7	8.8	9.1	9.5	9.9	10.3	10.6
7,5°	18.6	18.9	19.3	19.8	19.8	20.0	20.1	20.7	20.7	21.1
10,0°	40.3	39.6	39.2	36.2	32.4	28.6	26.2	26.1	27.6	30.0
12,5°	44.9	46.8	52.6	52.5	54.2	52.9	56.0	57.8	57.7	56.0
15,0°	63.1	60.1	81.1	76.8	78.6	93.3	99.7	79.8	84.5	85.1
17,5°	90.3	83.2	102.1	99.4	112.8	107.8	110.0	95.1	101.6	94.7
20,0°	123.3	131.2	127.6	122.2	120.3	109.9	100.0	98.2	102.4	99.1
22,5°	137.9	126.6	136.4	141.5	138.9	130.3	116.6	110.5	100.6	96.7
25,0°	139.7	132.6	140.0	140.1	147.1	144.8	136.1	124.5	112.3	101.5
27,5°	158.2	138.8	146.5	141.3	143.0	146.1	141.4	135.4	126.3	118.8
30,0°	169.5	166.0	174.3	159.0	154.8	150.1	140.0	137.0	137.3	140.3
32,5°	181.5	173.1	183.8	171.5	170.0	169.8	158.2	152.6	149.5	157.6
35,0°	193.1	193.6	190.0	175.8	174.8	173.7	170.1	169.9	166.4	169.0
37,5°	217.8	215.0	210.7	186.8	181.3	173.5	169.2	187.5	191.8	190.6
40,0°	226.6	224.5	225.4	205.2	203.8	188.9	179.2	193.5	200.9	205.9
42,5°	256.3	232.2	238.1	214.3	210.2	197.4	199.3	209.7	210.6	219.6
45,0°	271.2	252.4	257.5	229.3	218.5	198.0	209.7	227.9	227.3	229.4
47,5°	278.0	270.5	281.5	256.8	233.3	211.8	219.3	237.8	248.7	244.7
50,0°	284.7	280.4	308.9	280.7	254.6	228.5	253.4	262.7	255.9	250.9
52,5°	292.9	288.8	320.4	292.2	276.9	259.4	281.1	285.2	260.2	248.0
55,0°	305.7	291.7	317.8	304.1	304.8	296.2	299.2	300.8	276.8	253.1
57,5°	322.9	301.1	324.9	321.0	348.1	339.7	328.7	306.9	287.0	259.0
60,0°	298.8	292.5	328.9	334.1	379.7	368.3	340.7	319.5	295.6	255.3
62,5°	249.2	250.6	301.6	332.5	379.2	384.5	344.2	330.2	303.7	254.0
65,0°	216.7	214.5	260.1	288.8	358.1	395.8	362.6	336.8	295.9	247.9
67,5°	193.8	204.1	247.9	260.9	330.7	405.9	370.3	315.3	283.4	235.2
70,0°	207.1	223.1	254.6	265.3	313.4	377.3	350.2	291.4	262.8	212.9
72,5°	232.4	238.6	245.3	257.8	296.2	336.2	316.5	265.2	220.1	184.8
75,0°	197.5	199.9	216.0	231.6	270.6	292.8	274.6	215.3	164.4	136.8
77,5°	146.6	140.2	154.5	175.2	188.9	195.4	185.1	140.9	109.6	95.3
80,0°	89.3	79.5	95.6	110.5	113.1	106.3	104.5	90.2	75.7	59.9
82,5°	53.9	46.3	52.8	64.1	56.8	48.4	56.0	60.7	53.4	37.4
85,0°	24.6	25.3	29.1	34.5	31.8	26.5	33.2	37.1	28.2	17.7
87,5°	14.2	15.0	15.9	17.0	16.5	16.5	18.6	16.7	14.8	11.6
90,0°	9.0	9.1	9.2	9.1	9.0	8.8	8.7	8.4	8.2	8.1
92,5°	8.4	8.6	8.6	8.5	8.3	8.2	8.0	7.9	7.7	7.5
95,0°	7.9	8.1	8.2	8.0	7.9	7.8	7.6	7.5	7.3	7.2
97,5°	7.3	7.6	7.7	7.6	7.5	7.4	7.2	7.1	6.9	6.9
100,0°	7.0	7.3	7.3	7.3	7.0	7.0	6.9	6.7	6.7	6.5
102,5°	6.6	6.9	7.0	6.9	6.7	6.7	6.5	6.4	6.4	6.2
105,0°	6.3	6.4	6.4	6.4	6.4	6.3	6.1	6.1	6.1	5.9
107,5°	6.0	6.1	6.1	6.1	6.0	6.0	5.8	5.8	5.8	5.6
110,0°	5.7	5.8	5.8	5.8	5.7	5.7	5.7	5.5	5.5	5.4

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425JF14H000022 EAN: 4058352636619	LP number 58891_27
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130°	125°	120°	115°	110°	105°	100°	95°			
	230°	235°	240°	245°	250°	255°	260°	265°	270°		
	310°	305°	300°	295°	290°	285°	280°	275°			
γ	Luminous intensity in cd/klm									Luminous flux in lm/klm	
0,0°	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	0.0	0.0
2,5°	6.7	6.7	6.7	6.7	6.7	6.7	6.6	6.6	6.6	0.1	0.1
5,0°	10.8	11.1	11.3	11.5	11.8	12.2	12.4	12.4	12.4	0.2	0.3
7,5°	22.2	23.4	25.1	26.8	28.9	30.4	31.8	32.5	31.9	0.8	1.2
10,0°	32.2	35.0	37.5	37.3	41.7	43.0	46.7	45.0	45.2	1.7	2.9
12,5°	54.7	55.3	54.3	56.2	57.2	59.7	63.2	64.8	65.0	3.3	6.2
15,0°	73.2	71.1	73.9	74.5	80.2	81.2	84.4	86.6	87.0	5.7	11.9
17,5°	90.4	89.8	91.9	92.9	97.0	100.4	103.5	108.1	109.8	8.2	20.0
20,0°	97.8	97.1	103.4	105.4	110.2	114.7	119.1	119.1	118.8	10.4	30.5
22,5°	100.5	104.2	110.6	112.2	114.6	120.2	127.4	131.7	136.0	12.6	43.0
25,0°	104.2	108.1	116.5	120.3	126.9	131.6	135.2	136.7	138.5	14.8	57.8
27,5°	114.6	120.6	128.6	134.8	139.0	140.5	142.1	142.5	143.8	17.2	75.0
30,0°	136.5	131.9	137.1	145.8	149.8	148.3	148.9	147.6	148.7	20.3	95.3
32,5°	157.5	151.3	152.3	160.6	161.1	157.8	155.9	154.1	155.0	23.8	119.1
35,0°	175.5	176.3	172.3	172.8	173.3	165.9	162.7	164.4	167.0	27.3	146.4
37,5°	191.4	197.3	191.9	183.7	182.9	175.3	172.5	175.6	178.1	31.3	177.7
40,0°	199.3	204.8	205.7	195.7	192.1	184.7	183.9	188.0	191.1	35.1	212.9
42,5°	216.2	214.5	215.0	208.2	198.1	190.1	190.9	196.0	200.1	39.0	251.8
45,0°	229.7	225.9	225.5	218.4	201.1	193.3	196.6	201.2	203.1	42.9	294.7
47,5°	238.9	237.0	231.6	220.3	201.2	195.0	198.1	203.8	204.9	46.8	341.5
50,0°	244.6	239.4	229.3	215.1	196.9	191.8	196.0	202.6	203.8	50.6	392.1
52,5°	245.7	241.4	224.4	203.6	187.5	185.0	190.1	197.2	199.0	53.6	445.7
55,0°	246.3	241.9	219.2	191.0	174.0	173.7	179.7	188.9	191.7	56.2	501.9
57,5°	244.0	235.4	209.4	173.1	154.7	155.7	164.2	174.5	177.9	58.8	560.7
60,0°	230.9	218.6	193.3	159.7	136.2	132.1	143.0	154.1	157.0	59.5	620.2
62,5°	221.8	203.8	174.9	143.2	116.8	108.5	115.9	125.1	129.8	57.8	678.0
65,0°	210.3	190.7	158.5	121.7	93.9	85.3	88.2	92.5	95.3	54.6	732.6
67,5°	194.4	171.6	135.5	97.9	69.4	60.1	61.0	61.9	61.7	51.1	783.8
70,0°	176.0	154.0	114.0	81.2	54.1	41.3	38.3	38.6	38.3	48.2	832.0
72,5°	155.0	131.0	97.3	66.0	43.6	27.3	23.3	22.5	23.7	44.4	876.4
75,0°	124.8	108.4	80.3	53.2	33.7	20.9	16.7	15.6	15.9	37.7	914.1
77,5°	102.3	98.5	66.6	36.9	21.3	15.4	13.3	12.1	12.1	27.2	941.3
80,0°	55.1	55.1	38.2	22.3	13.3	11.6	10.9	10.4	10.3	16.5	957.8
82,5°	23.5	18.6	15.5	13.9	11.1	9.7	9.1	9.1	8.8	9.3	967.2
85,0°	12.9	11.4	10.6	10.1	9.5	8.6	8.2	8.2	7.9	5.4	972.6
87,5°	9.7	9.1	8.5	9.1	8.2	7.8	7.4	7.4	7.3	3.4	976.0
90,0°	7.8	7.5	7.4	7.2	7.0	6.8	6.7	6.7	6.7	2.2	978.1
92,5°	7.3	7.2	7.0	6.8	6.7	6.5	6.4	6.4	6.4	2.1	980.2
95,0°	7.0	6.9	6.6	6.6	6.4	6.3	6.1	6.1	6.1	2.0	982.1
97,5°	6.7	6.6	6.4	6.3	6.1	6.0	5.9	5.8	5.8	1.8	984.0
100,0°	6.4	6.3	6.2	6.0	5.9	5.8	5.8	5.7	5.7	1.8	985.8
102,5°	6.1	6.1	5.9	5.8	5.6	5.6	5.5	5.5	5.5	1.7	987.4
105,0°	5.8	5.8	5.6	5.5	5.5	5.4	5.3	5.2	5.2	1.6	989.0
107,5°	5.6	5.5	5.4	5.3	5.2	5.2	5.1	5.1	5.1	1.5	990.5
110,0°	5.4	5.3	5.2	5.2	5.1	5.1	4.9	4.9	4.9	1.4	991.9

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425JF14H000022 EAN: 4058352636619	LP number 58891_27
------------------------------------	--	-------------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ		Luminous intensity in cd/klm								
112,5°	5.2	5.5	5.6	5.6	5.4	5.4	5.4	5.4	5.2	5.2
115,0°	5.2	5.2	5.3	5.3	5.1	5.1	5.1	5.1	5.0	4.9
117,5°	4.8	4.9	4.9	4.9	4.8	4.8	4.8	4.8	4.7	4.6
120,0°	4.6	4.6	4.6	4.6	4.5	4.5	4.5	4.5	4.5	4.5
122,5°	4.0	4.2	4.2	4.2	4.1	4.0	4.2	4.0	4.0	4.0
125,0°	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.3
127,5°	2.4	2.4	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
130,0°	1.5	1.5	1.5	1.5	1.6	1.5	1.5	1.5	1.6	1.6
132,5°	1.3	1.5	1.4	1.5	1.5	1.3	1.3	1.4	1.4	1.3
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3	1.2
137,5°	1.0	1.0	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.0
140,0°	0.9	0.9	0.9	0.9	0.9	0.8	0.9	0.8	0.9	0.8
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425JF14H000022 EAN: 4058352636619	LP number 58891_27
-----------------------------	--	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°				
	310°	305°	300°	295°	290°	285°	280°	275°				
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm	
112,5°	5.1	5.1	5.0	5.0	4.9	4.9	4.9	4.8	4.8	1.3	993.2	
115,0°	4.9	4.9	4.8	4.8	4.8	4.6	4.6	4.6	4.6	1.2	994.4	
117,5°	4.6	4.6	4.5	4.6	4.5	4.5	4.5	4.4	4.3	1.1	995.5	
120,0°	4.4	4.3	4.3	4.2	4.2	4.2	4.2	4.2	4.2	1.0	996.6	
122,5°	4.0	4.0	4.0	3.9	3.9	3.9	3.9	3.9	3.9	0.9	997.5	
125,0°	3.2	3.2	3.2	3.2	3.1	3.2	3.2	3.1	3.1	0.7	998.2	
127,5°	2.2	2.2	2.2	2.2	2.3	2.2	2.2	2.2	2.1	0.5	998.7	
130,0°	1.6	1.6	1.6	1.5	1.5	1.5	1.5	1.5	1.5	0.3	999.1	
132,5°	1.4	1.4	1.4	1.3	1.3	1.3	1.3	1.3	1.2	0.3	999.3	
135,0°	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.6	
137,5°	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.2	999.8	
140,0°	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.1	999.9	
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.1	1000.0	
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425JF14H000022 EAN: 4058352636619	LP number 58891_27
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	2990	19.3	20.6	20.0
95	241	252	2837	18.3	19.4	18.8
90	229	250	2696	17.3	18.4	17.8
85	216	248	2543	16.3	17.3	16.8
80	203	246	2390	15.2	16.2	15.7
75	190	243	2237	14.2	15.1	14.6
70	178	241	2095	13.3	14.1	13.7
65	165	238	1942	12.4	13.2	12.8
60	152	235	1789	11.4	12.1	11.8
55	140	232	1648	10.5	11.2	10.8
50	127	229	1495	9.6	10.1	9.8
45	114	225	1342	8.7	9.2	9.0
40	102	221	1201	7.9	8.3	8.1
35	89	216	1048	7.1	7.4	7.2
30	76	210	895	6.2	6.5	6.4
25	63	203	742	5.4	5.6	5.5
20	51	195	600	4.6	4.8	4.7
17	44	190	518	4.1	4.3	4.2