
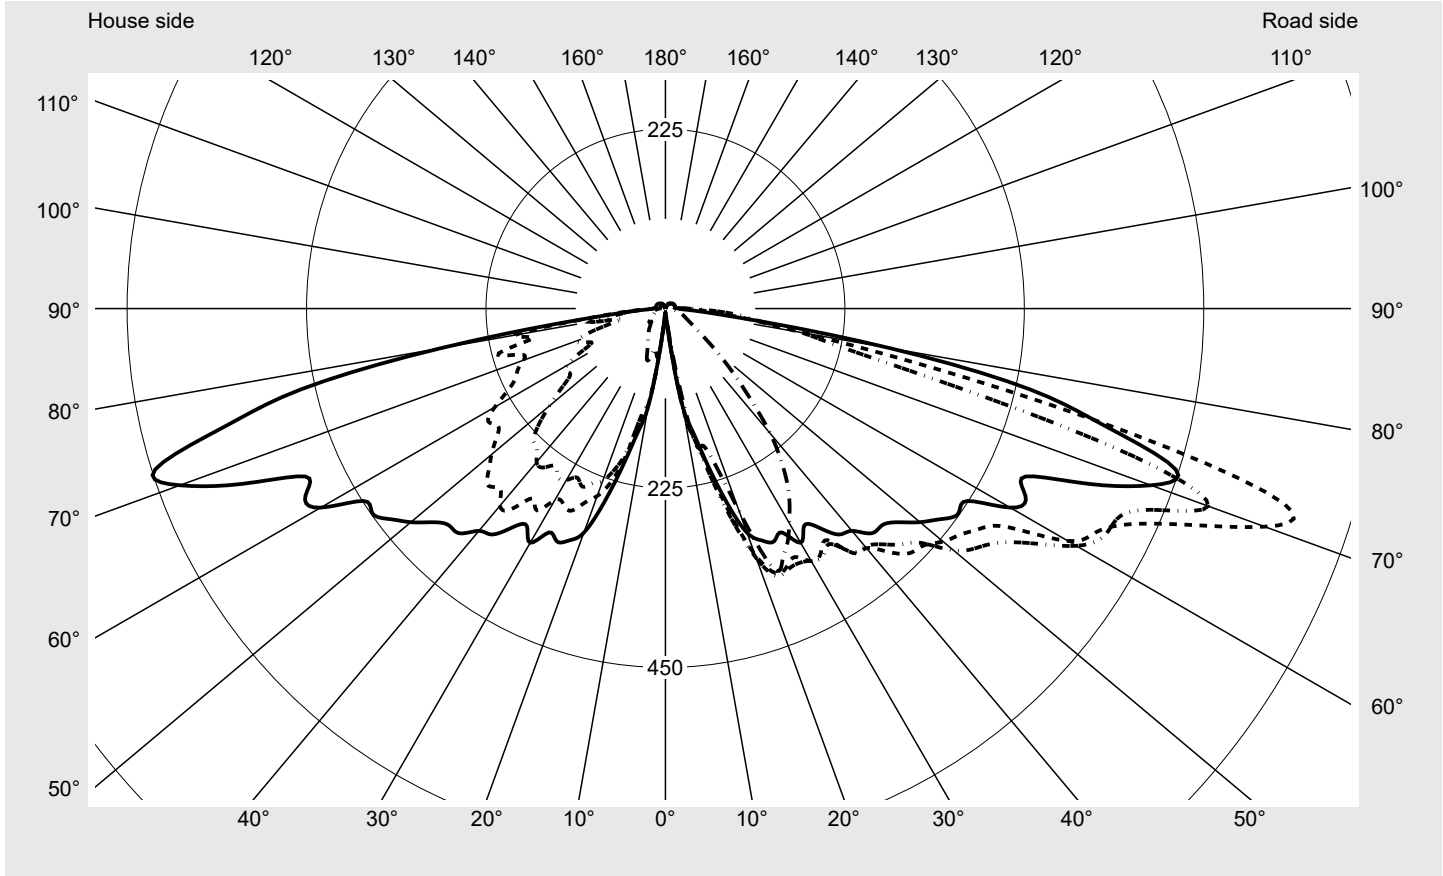


Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
	Version post-top- or mounting to wall arm Optic asymmetric, extremely wide distribution (P1.0a) Cover cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 4990 lm Power consumption = 33.6 W Luminous efficacy = 148.5 lm/W	serial documentation 17.07.2024



Luminous intensity in cd/klm C180-0 C190-10 C195-15 C270-90 **Imax: 813 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	94.5%
Eta 90° - 180°	5.5%


Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	799.6
Imax 80°	285.8
Imax 90°	34.0
Imax >90°	17.5
Imax >95°	12.2

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
---------------------------	--	-------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

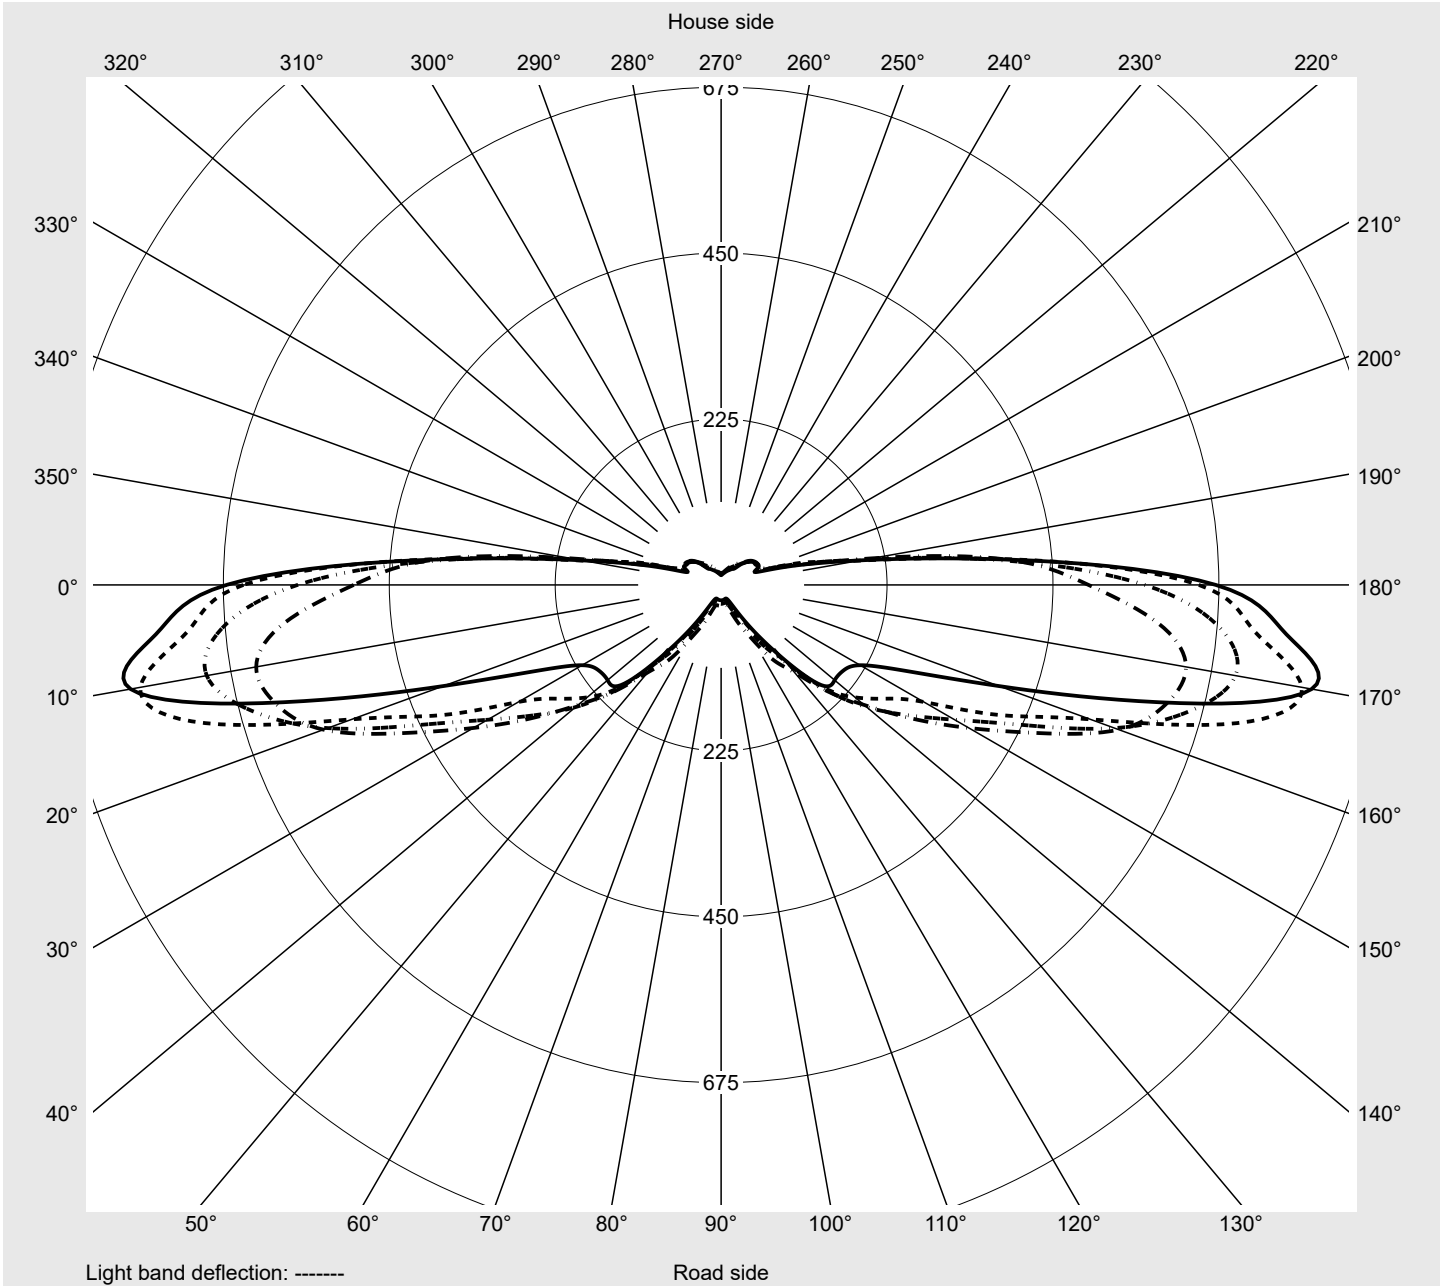

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	5.9	5.8	5.9	6.0	6.0	5.9	6.1	6.1	6.2	6.2	6.3	6.5	6.7
5,0°	11.1	10.5	10.0	9.4	9.2	9.0	8.9	8.9	9.0	9.1	9.1	9.3	9.3
7,5°	51.0	46.1	42.5	39.9	38.1	36.6	35.7	34.7	34.6	34.0	33.0	32.1	31.1
10,0°	125.2	125.3	128.8	126.8	124.3	116.8	101.6	92.3	89.6	88.8	87.0	85.9	87.1
12,5°	157.8	165.8	167.3	166.7	167.7	171.0	177.7	180.6	167.5	153.4	147.6	146.2	148.0
15,0°	201.1	204.4	204.8	216.7	228.3	228.4	230.0	230.6	242.1	252.3	252.3	242.0	227.8
17,5°	253.8	262.8	270.0	277.9	277.4	289.2	300.2	308.8	306.4	302.3	293.9	287.1	279.8
20,0°	299.1	311.6	328.2	332.9	334.9	330.4	321.5	311.9	309.5	316.8	321.9	316.6	305.0
22,5°	314.6	335.2	358.6	363.0	364.4	364.6	357.3	348.6	332.9	325.4	318.8	322.5	316.2
25,0°	322.1	337.7	358.4	361.9	366.3	367.9	366.4	359.8	344.9	332.8	326.9	317.9	310.3
27,5°	316.5	339.4	351.3	360.2	372.3	372.7	367.6	361.0	352.0	328.9	314.9	310.5	299.8
30,0°	339.1	357.1	365.7	365.0	366.6	371.8	373.7	357.0	339.3	327.0	307.3	300.0	286.5
32,5°	323.4	344.3	362.8	367.9	369.8	358.4	355.5	343.1	320.0	312.0	293.7	283.0	265.5
35,0°	335.2	356.8	354.5	360.1	371.4	375.6	365.5	350.1	327.5	305.1	279.4	264.0	244.6
37,5°	357.1	373.5	386.4	384.8	370.9	357.5	361.1	342.1	320.9	297.5	266.6	246.0	224.5
40,0°	363.8	381.6	392.1	389.7	388.8	367.7	352.3	329.0	302.3	280.4	253.4	223.8	203.9
42,5°	382.3	402.3	413.8	400.9	396.3	380.6	362.2	337.7	297.9	261.8	233.4	208.6	198.8
45,0°	384.2	407.0	433.5	418.1	400.9	367.4	351.6	320.8	286.1	256.5	231.1	200.7	190.7
47,5°	396.6	411.1	439.5	435.0	431.1	383.2	358.6	315.0	276.8	245.4	210.2	189.5	178.8
50,0°	416.7	432.1	454.5	471.8	470.1	407.5	356.6	305.7	255.1	223.1	183.9	175.3	166.3
52,5°	433.9	469.5	465.8	492.6	476.3	426.2	360.0	290.1	244.5	209.3	168.8	162.7	151.9
55,0°	448.3	486.3	481.4	511.7	475.9	443.5	374.1	299.6	239.6	193.1	160.7	161.9	140.5
57,5°	448.9	502.6	510.5	548.2	520.2	455.0	366.9	298.1	237.0	192.7	165.4	157.8	122.0
60,0°	499.1	547.3	582.8	595.0	567.4	479.6	375.6	313.0	253.5	197.7	167.4	150.2	117.9
62,5°	508.9	568.6	608.1	619.3	601.4	492.2	387.9	321.1	256.2	206.2	169.0	135.3	108.2
65,0°	498.2	594.8	640.2	624.5	573.8	475.4	388.0	315.8	253.2	203.9	154.9	124.9	85.7
67,5°	574.4	679.9	708.3	659.2	567.7	448.9	365.6	307.9	257.8	201.5	139.1	100.3	59.7
70,0°	647.9	726.4	799.6	724.2	532.9	417.7	317.4	269.0	237.3	197.6	135.3	82.2	46.1
72,5°	670.9	769.5	813.2	614.7	401.1	275.6	217.8	202.4	201.0	192.1	129.6	74.0	37.0
75,0°	572.7	659.7	603.1	372.2	231.6	175.1	154.5	139.0	140.7	142.2	94.4	54.8	27.2
77,5°	468.0	444.5	344.0	230.3	173.5	141.8	125.2	119.0	101.9	81.7	52.9	33.2	21.1
80,0°	285.8	235.7	176.8	173.6	137.8	94.2	90.9	98.1	70.3	55.6	37.7	24.2	16.4
82,5°	113.1	97.9	110.0	117.4	95.8	70.1	77.6	67.0	40.5	31.9	25.2	18.8	14.1
85,0°	47.4	54.3	66.4	91.3	81.1	55.8	51.6	40.8	26.6	23.1	19.1	14.7	12.3
87,5°	21.5	29.3	43.7	58.6	44.3	33.5	28.3	20.7	16.9	16.4	15.6	12.1	11.3
90,0°	16.4	20.8	29.3	34.0	25.5	18.7	17.7	13.4	12.6	12.9	12.4	11.1	10.8
92,5°	13.1	13.4	17.5	14.9	13.6	12.7	12.0	11.7	11.4	11.1	10.9	10.7	10.4
95,0°	12.3	12.4	12.4	12.3	12.2	12.0	11.7	11.4	11.2	11.0	10.8	10.5	10.4
97,5°	12.2	12.2	12.2	12.2	12.1	11.8	11.6	11.4	11.2	10.9	10.8	10.5	10.4
100,0°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.1	10.8	10.7	10.5	10.4
102,5°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.0	10.9	10.7	10.5	10.4
105,0°	12.2	12.2	12.2	12.1	12.0	11.7	11.4	11.2	11.0	10.8	10.6	10.5	10.4
107,5°	12.1	12.1	12.1	12.0	11.8	11.6	11.3	11.1	10.9	10.7	10.5	10.4	10.3
110,0°	12.0	12.0	11.9	11.9	11.7	11.5	11.3	11.0	10.8	10.6	10.5	10.4	10.3
112,5°	11.9	11.8	11.9	11.7	11.6	11.4	11.1	10.9	10.7	10.5	10.4	10.3	10.2

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	6.8	7.0	7.1	7.3	7.3	7.4	5.9	5.9	6.0	6.1	6.1	6.1	6.2
5,0°	9.4	9.5	9.7	9.8	9.8	9.8	11.7	12.5	13.8	15.5	17.4	18.5	19.5
7,5°	30.0	28.4	27.6	27.4	26.9	26.6	53.0	53.4	52.5	51.4	50.3	50.6	51.3
10,0°	88.0	90.4	91.0	91.9	92.3	91.4	120.8	120.8	116.9	104.2	91.8	78.5	72.5
12,5°	153.1	158.8	164.5	170.5	172.5	172.3	146.0	139.3	134.8	134.5	129.3	125.1	117.5
15,0°	211.6	200.5	189.3	183.1	178.5	177.9	196.5	190.6	182.9	173.5	168.2	149.9	132.7
17,5°	269.1	253.6	232.4	214.6	204.0	201.5	238.8	229.0	211.4	186.1	168.3	150.0	130.3
20,0°	301.9	298.2	289.8	280.8	274.3	270.1	269.6	250.1	229.7	204.9	176.3	152.9	134.4
22,5°	317.4	318.6	316.8	324.3	342.3	352.1	289.5	263.0	236.5	208.1	175.0	145.3	128.4
25,0°	316.0	319.1	322.1	336.7	346.6	347.4	302.2	279.7	246.3	211.8	174.9	139.4	120.9
27,5°	301.6	301.1	306.9	322.1	329.5	331.3	299.7	276.8	239.1	196.9	169.4	144.6	112.7
30,0°	282.6	280.2	289.2	303.6	307.7	310.4	307.9	277.2	248.6	204.2	170.2	137.6	96.5
32,5°	259.6	260.0	271.1	283.7	286.3	289.7	322.2	300.0	250.5	202.2	164.6	116.8	85.2
35,0°	237.3	241.4	253.3	262.2	264.2	265.8	315.1	290.5	240.9	200.6	160.5	108.3	84.8
37,5°	216.8	222.2	232.2	236.8	236.6	236.7	340.4	316.9	251.2	212.6	149.5	103.0	76.2
40,0°	198.5	203.8	207.7	208.8	205.4	204.6	351.4	322.5	251.3	201.1	135.1	98.7	62.3
42,5°	188.3	182.1	180.8	176.1	168.7	166.1	357.5	306.5	238.4	176.6	123.5	83.0	60.4
45,0°	179.7	164.3	154.8	145.8	136.4	133.1	370.3	314.1	233.4	148.8	105.1	68.9	62.4
47,5°	160.6	141.3	129.1	118.0	110.3	106.6	373.9	300.6	215.6	123.6	82.7	64.1	59.9
50,0°	144.8	124.3	109.5	96.5	87.8	84.2	373.2	284.7	190.0	107.7	66.5	59.7	56.2
52,5°	126.5	104.1	92.6	78.0	68.8	65.8	369.4	267.3	164.9	93.5	62.4	56.7	54.2
55,0°	111.3	85.8	74.1	60.3	54.1	52.5	373.7	256.3	145.8	82.8	62.7	56.7	54.2
57,5°	93.5	75.6	62.0	47.5	43.7	43.4	379.7	263.4	146.9	82.8	62.7	55.2	54.5
60,0°	86.0	60.1	46.8	37.9	37.1	37.0	385.2	246.9	142.8	83.5	61.6	58.2	56.8
62,5°	82.5	48.9	35.8	32.3	32.1	32.1	389.4	223.1	121.9	77.7	56.3	56.6	54.8
65,0°	59.7	38.9	29.0	28.1	28.3	28.5	391.4	207.5	102.2	66.3	55.9	56.8	55.3
67,5°	40.4	28.9	25.1	25.0	25.4	25.7	382.8	200.4	111.7	62.2	54.7	56.8	55.0
70,0°	30.9	24.2	22.2	22.4	23.1	23.2	397.6	189.6	117.8	59.5	55.3	57.1	53.1
72,5°	22.9	19.6	19.7	20.3	20.7	20.8	393.3	191.9	99.3	50.9	55.2	54.4	53.5
75,0°	17.7	17.6	17.9	18.3	18.3	18.3	419.2	216.1	66.2	48.4	52.3	52.6	49.4
77,5°	16.4	16.1	15.9	15.8	15.3	14.8	325.7	169.7	59.3	43.1	47.7	45.8	42.1
80,0°	14.6	14.4	14.2	13.6	13.1	12.8	240.2	191.3	95.9	40.4	43.0	40.2	35.1
82,5°	13.0	12.9	12.4	12.0	11.7	11.7	172.7	107.2	62.9	34.6	35.4	32.5	28.7
85,0°	11.9	11.7	11.3	11.0	11.0	11.0	56.8	56.8	47.3	32.2	28.3	26.8	25.0
87,5°	10.8	10.8	10.6	10.4	10.3	10.2	16.4	24.5	23.0	22.6	22.7	22.9	22.7
90,0°	10.5	10.4	10.2	10.2	9.9	9.8	14.0	14.1	15.8	17.5	19.3	19.3	18.8
92,5°	10.3	10.1	10.0	9.9	9.8	9.8	12.5	12.5	13.5	14.2	14.3	13.4	12.3
95,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
97,5°	10.3	10.2	10.1	10.0	10.0	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
100,0°	10.4	10.2	10.2	10.2	10.1	10.1	12.2	12.0	11.8	11.6	11.4	11.1	10.8
102,5°	10.3	10.2	10.1	10.1	10.1	10.0	12.2	12.0	11.9	11.6	11.4	11.1	10.8
105,0°	10.2	10.2	10.1	10.1	10.0	9.9	12.1	12.0	11.8	11.6	11.4	11.1	10.8
107,5°	10.2	10.1	10.1	10.1	9.9	9.9	12.0	11.9	11.7	11.6	11.3	11.0	10.8
110,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.0	11.8	11.7	11.5	11.3	11.0	10.7
112,5°	10.1	10.0	9.9	9.9	9.8	9.9	11.8	11.8	11.6	11.5	11.2	11.0	10.6

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	0.0	0.0
2,5°	6.4	6.6	6.9	7.4	8.2	8.4	8.2	8.2	8.1	8.1	8.1	0.1	0.1
5,0°	20.5	21.9	22.1	22.1	21.8	21.5	21.2	21.1	21.4	21.7	21.6	0.3	0.4
7,5°	54.1	56.6	54.7	57.0	56.7	52.2	50.1	48.8	50.1	52.2	53.7	1.6	2.0
10,0°	67.9	65.0	64.1	63.9	63.1	60.4	56.1	54.6	56.8	60.3	61.2	4.3	6.3
12,5°	105.0	94.3	82.8	74.6	68.5	61.4	53.4	50.7	51.6	53.4	53.6	7.7	14.0
15,0°	117.7	106.0	96.2	86.9	80.4	70.8	61.5	55.1	52.8	52.7	53.1	11.9	25.8
17,5°	116.0	102.5	92.2	81.9	73.7	69.1	65.4	64.2	62.6	64.0	65.7	16.3	42.1
20,0°	112.3	98.0	86.1	75.6	68.2	63.7	62.0	63.9	62.1	64.8	68.0	20.7	62.8
22,5°	109.1	87.0	73.8	65.2	62.2	59.6	57.2	58.5	55.5	57.5	59.7	24.4	87.2
25,0°	95.8	75.0	64.1	59.0	56.2	55.4	51.6	52.5	50.0	51.2	52.9	27.0	114.2
27,5°	84.0	64.4	58.1	55.3	52.2	51.3	46.6	47.3	44.7	45.9	47.2	28.8	143.0
30,0°	73.6	60.7	55.1	52.7	50.0	47.6	43.0	43.7	41.5	42.2	43.6	30.6	173.6
32,5°	69.6	57.8	52.6	50.6	48.1	44.6	40.4	40.5	38.5	38.9	39.9	31.7	205.3
35,0°	62.5	53.2	51.1	49.4	46.4	42.5	38.3	37.9	35.9	36.0	36.6	33.0	238.3
37,5°	56.9	53.0	50.0	48.5	45.6	41.5	37.0	35.5	33.3	33.5	34.0	34.6	272.9
40,0°	55.3	53.0	50.4	47.5	43.1	38.8	34.7	32.8	30.8	30.7	30.8	35.3	308.2
42,5°	55.4	52.7	50.5	47.2	43.6	38.6	33.3	30.2	28.4	28.2	28.0	36.1	344.3
45,0°	57.1	53.0	50.5	47.4	42.9	37.8	32.8	29.1	26.4	26.2	25.9	36.7	381.0
47,5°	55.9	54.7	53.1	48.6	43.2	37.3	31.9	27.8	25.9	24.6	24.1	37.2	418.2
50,0°	54.3	53.0	52.0	48.5	42.9	36.7	31.1	26.8	24.5	24.8	26.3	37.7	455.9
52,5°	53.4	51.9	50.3	45.7	40.3	34.7	30.0	26.3	25.0	24.6	24.3	38.2	494.1
55,0°	52.7	50.6	48.6	43.5	39.1	34.8	30.2	25.1	21.8	21.2	20.6	38.9	533.0
57,5°	53.3	51.2	49.7	43.7	36.9	31.3	26.6	22.6	20.1	19.5	19.0	40.3	573.3
60,0°	53.3	48.2	45.6	40.4	34.8	29.8	25.5	21.8	19.4	18.8	18.1	43.0	616.3
62,5°	51.9	45.6	42.0	37.7	33.0	28.2	24.4	21.1	18.7	17.8	17.2	44.2	660.4
65,0°	51.0	43.7	38.4	34.5	30.4	26.4	22.6	19.7	17.6	16.6	16.1	44.0	704.4
67,5°	49.7	42.3	35.2	31.2	27.7	24.4	21.3	18.8	16.9	15.8	15.1	45.3	749.8
70,0°	48.6	41.0	32.4	28.6	25.5	22.8	20.2	17.9	16.2	15.0	14.1	46.3	796.1
72,5°	48.5	41.5	29.9	26.3	23.6	21.3	19.2	17.1	15.5	14.0	13.2	42.7	838.7
75,0°	44.3	38.7	27.8	24.7	22.0	20.1	19.4	18.0	16.5	15.0	14.1	34.0	872.8
77,5°	37.7	31.2	27.1	24.7	22.3	20.1	19.8	19.2	18.7	17.1	16.2	25.3	898.1
80,0°	28.5	26.9	24.9	22.8	20.8	18.9	18.2	17.7	17.8	16.4	15.8	18.6	916.7
82,5°	25.3	24.8	21.9	20.2	18.9	17.4	16.1	14.8	14.4	12.9	12.1	12.2	928.8
85,0°	23.7	22.6	18.5	16.8	15.9	15.1	14.0	12.8	12.2	11.4	10.8	8.3	937.1
87,5°	22.5	19.6	15.7	14.5	13.8	13.1	12.3	11.5	11.0	10.1	9.5	5.4	942.5
90,0°	18.9	15.3	13.2	12.3	11.4	10.8	10.4	10.0	9.6	8.3	7.5	4.1	946.6
92,5°	11.4	10.8	10.3	10.0	9.5	9.2	8.9	8.6	8.3	7.3	6.5	3.1	949.7
95,0°	10.4	10.2	9.8	9.6	9.2	9.0	8.7	8.5	8.1	7.2	6.4	2.9	952.6
97,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.6	8.2	7.2	6.4	2.9	955.5
100,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.2	6.4	2.9	958.3
102,5°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.3	6.6	2.8	961.1
105,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.8	8.6	8.3	7.3	6.7	2.8	963.9
107,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.5	8.2	7.2	6.6	2.7	966.7
110,0°	10.4	10.1	9.8	9.5	9.2	9.0	8.7	8.4	8.2	7.2	6.7	2.7	969.4
112,5°	10.3	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.0	7.2	6.7	2.6	972.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
Table of values for luminous intensities		Maximum luminous intensity
		siteco


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	11.8	11.8	11.7	11.6	11.5	11.3	11.0	10.8	10.6	10.4	10.2	10.2	10.1
117,5°	11.6	11.6	11.6	11.4	11.3	11.1	10.8	10.6	10.5	10.3	10.2	10.0	9.9
120,0°	11.4	11.3	11.3	11.2	11.1	10.9	10.7	10.5	10.3	10.2	10.0	9.9	9.8
122,5°	11.1	11.0	11.0	10.9	10.8	10.6	10.4	10.3	10.1	10.0	9.8	9.8	9.6
125,0°	10.7	10.8	10.7	10.6	10.5	10.3	10.2	10.0	9.9	9.8	9.6	9.5	9.4
127,5°	10.4	10.4	10.4	10.3	10.2	10.1	9.9	9.8	9.7	9.5	9.4	9.3	9.2
130,0°	10.0	10.0	9.9	9.9	9.8	9.8	9.6	9.5	9.4	9.3	9.2	9.1	9.1
132,5°	9.6	9.6	9.6	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.9	8.9	8.8
135,0°	9.1	9.1	9.1	9.1	9.1	9.0	8.9	8.9	8.8	8.7	8.6	8.6	8.6
137,5°	8.6	8.6	8.7	8.7	8.7	8.6	8.6	8.6	8.6	8.4	8.4	8.4	8.3
140,0°	8.2	8.3	8.3	8.3	8.4	8.3	8.2	8.2	8.2	8.2	8.1	8.1	8.1
142,5°	7.8	7.9	8.0	8.1	8.1	8.0	8.0	7.9	7.9	7.9	7.9	7.9	7.8
145,0°	7.5	7.5	7.5	7.6	7.6	7.7	7.7	7.7	7.7	7.7	7.7	7.6	7.5
147,5°	6.9	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.3	7.3	7.2	7.2	7.2
150,0°	6.3	6.3	6.4	6.4	6.5	6.6	6.6	6.6	6.6	6.6	6.6	6.7	6.7
152,5°	5.4	5.4	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.8	5.8
155,0°	4.2	4.3	4.4	4.5	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.7	4.7
157,5°	3.2	3.2	3.3	3.3	3.3	3.3	3.4	3.5	3.5	3.5	3.5	3.5	3.6
160,0°	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.4	2.4	2.4	2.3	2.4	2.4
162,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	2.0	2.0	2.1
165,0°	1.6	1.6	1.6	1.7	1.7	1.8	1.9	1.9	1.9	1.9	1.9	1.9	1.9
167,5°	1.5	1.5	1.5	1.5	1.6	1.7	1.7	1.7	1.7	1.9	1.9	2.0	1.9
170,0°	1.4	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.5
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	10.0	9.9	9.8	9.8	9.8	9.8	11.7	11.7	11.5	11.4	11.2	11.0	10.6
117,5°	9.9	9.8	9.8	9.8	9.6	9.6	11.5	11.5	11.4	11.2	11.0	10.8	10.5
120,0°	9.8	9.7	9.6	9.6	9.6	9.6	11.3	11.3	11.2	11.0	10.8	10.6	10.3
122,5°	9.6	9.4	9.4	9.4	9.4	9.4	11.0	11.0	10.8	10.7	10.5	10.3	10.1
125,0°	9.4	9.3	9.2	9.2	9.2	9.2	10.6	10.6	10.5	10.4	10.2	10.0	9.8
127,5°	9.2	9.1	9.1	9.1	9.1	9.1	10.3	10.3	10.2	10.1	9.9	9.8	9.5
130,0°	9.0	8.9	8.9	8.9	8.8	8.7	9.9	9.9	9.8	9.6	9.5	9.4	9.2
132,5°	8.7	8.7	8.6	8.6	8.6	8.6	9.5	9.5	9.3	9.2	9.1	9.0	8.8
135,0°	8.5	8.4	8.4	8.4	8.4	8.4	9.0	9.0	8.8	8.7	8.6	8.4	8.3
137,5°	8.3	8.2	8.2	8.2	8.2	8.1	8.5	8.4	8.4	8.3	8.1	8.1	7.9
140,0°	8.1	7.9	7.9	7.9	7.9	7.9	8.1	8.1	8.0	7.9	7.8	7.6	7.5
142,5°	7.8	7.7	7.7	7.7	7.7	7.7	7.8	7.7	7.6	7.5	7.4	7.3	7.2
145,0°	7.6	7.5	7.5	7.5	7.5	7.5	7.4	7.3	7.2	7.1	7.1	6.9	6.9
147,5°	7.2	7.2	7.2	7.2	7.2	7.2	6.9	6.8	6.7	6.6	6.6	6.4	6.4
150,0°	6.7	6.7	6.7	6.7	6.7	6.7	6.1	6.0	6.0	5.9	5.7	5.7	5.6
152,5°	5.8	5.8	5.8	5.8	5.8	5.8	5.3	5.2	5.1	5.0	4.9	4.8	4.7
155,0°	4.8	4.8	4.8	4.8	4.8	4.7	4.2	4.1	4.0	4.0	3.9	3.8	3.7
157,5°	3.5	3.5	3.5	3.5	3.4	3.4	3.1	3.0	3.0	3.0	2.9	2.8	2.8
160,0°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1
162,5°	2.1	2.1	2.1	2.1	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8
165,0°	1.9	1.9	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.7	1.7	1.7	1.7
167,5°	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.5	1.5	1.5	1.5	1.5	1.5
170,0°	1.5	1.4	1.5	1.5	1.5	1.5	1.3	1.4	1.4	1.4	1.3	1.3	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
Table of values for luminous intensities		
Maximum luminous intensity		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	10.3	10.0	9.7	9.5	9.2	8.9	8.6	8.3	8.0	7.2	6.7	2.5	974.5
117,5°	10.2	9.9	9.6	9.3	9.0	8.8	8.5	8.2	7.9	7.1	6.7	2.5	977.0
120,0°	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.1	7.7	7.0	6.7	2.4	979.3
122,5°	9.8	9.5	9.2	9.0	8.7	8.5	8.2	7.9	7.6	6.9	6.6	2.3	981.6
125,0°	9.5	9.2	9.0	8.8	8.5	8.3	8.0	7.7	7.5	6.8	6.5	2.1	983.7
127,5°	9.2	9.1	8.8	8.5	8.3	8.1	7.7	7.5	7.1	6.7	6.5	2.0	985.7
130,0°	9.0	8.7	8.5	8.3	8.1	7.8	7.5	7.2	6.9	6.6	6.4	1.9	987.6
132,5°	8.6	8.3	8.1	7.9	7.7	7.5	7.2	6.8	6.6	6.3	6.2	1.7	989.4
135,0°	8.1	7.8	7.7	7.5	7.3	7.2	6.9	6.5	6.3	6.1	6.0	1.6	991.0
137,5°	7.7	7.5	7.4	7.2	7.0	6.9	6.6	6.3	6.1	6.0	6.0	1.5	992.4
140,0°	7.3	7.1	7.1	6.9	6.8	6.4	6.4	6.0	5.9	5.8	5.8	1.3	993.8
142,5°	7.1	6.9	6.8	6.7	6.5	6.2	6.1	5.8	5.7	5.7	5.7	1.2	995.0
145,0°	6.7	6.6	6.5	6.4	6.3	6.2	5.9	5.6	5.6	5.6	5.7	1.1	996.1
147,5°	6.3	6.2	6.0	6.0	5.8	5.8	5.5	5.3	5.2	5.3	5.3	1.0	997.1
150,0°	5.5	5.4	5.4	5.2	5.1	5.0	4.8	4.6	4.6	4.6	4.6	0.8	997.9
152,5°	4.7	4.5	4.5	4.3	4.3	4.2	4.0	3.9	3.8	3.8	3.8	0.6	998.6
155,0°	3.6	3.6	3.5	3.4	3.3	3.3	3.3	3.1	3.1	3.1	3.0	0.5	999.0
157,5°	2.8	2.7	2.7	2.6	2.6	2.5	2.4	2.4	2.4	2.4	2.4	0.3	999.4
160,0°	2.1	2.1	2.1	2.1	1.9	1.9	1.9	1.9	1.9	1.9	1.9	0.2	999.6
162,5°	1.7	1.8	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.2	999.7
165,0°	1.7	1.7	1.6	1.5	1.5	1.6	1.5	1.5	1.5	1.6	1.5	0.1	999.8
167,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
170,0°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	1.3	1.4	1.3	1.4	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575LF14HP00022 EAN: 4058352956885	LP number 59429_189
---------------------------	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4990	33.6	35.9	34.8
95	241	252	4735	31.4	33.5	32.4
90	229	250	4499	29.4	31.4	30.4
85	216	248	4243	27.4	29.2	28.3
80	203	246	3988	25.5	27.1	26.3
75	190	243	3733	23.6	25.2	24.4
70	178	241	3497	21.9	23.3	22.6
65	165	238	3242	20.2	21.5	20.8
60	152	235	2986	18.5	19.6	19.0
55	140	232	2750	16.9	18.0	17.4
50	127	229	2495	15.3	16.2	15.8
45	114	225	2240	13.7	14.5	14.1
40	102	221	2004	12.3	13.0	12.6
35	89	216	1748	10.8	11.4	11.1
30	76	210	1493	9.3	9.8	9.6
25	63	203	1238	7.8	8.2	8.0
20	51	195	1002	6.6	6.9	6.8
15	38	184	747	5.2	5.5	5.4
11	28	173	550	4.1	4.4	4.2